




Suspension



CE IP44 IP66

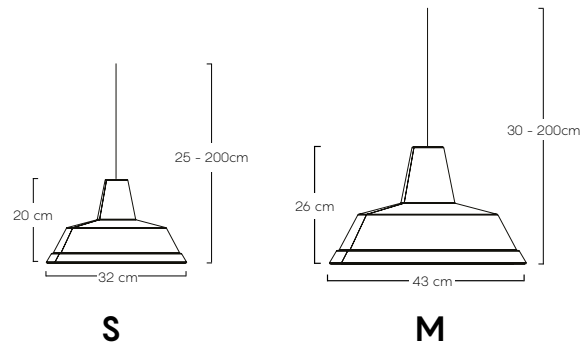

Material:
Poleasy

Finishing e colours:
IL: 110 transparent

Net weight:
1 kg (Funnel S)
2 kg (Funnel M)
3,5 kg (Funnel L)

VP: 162 dark pearl
150 light blue
500 rust
101 copper

Volume packaging:
0,018 mc (Funnel S)
0,070 mc (Funnel M)

Cable length:
2 mt black cable
6mt black cable with plug (ver-
sion portable, IP44)

Switch:
Connection box

Power Input:
220-240V 50/60Hz

Power Consumption:
5W (Funnel S - M)




Light source:
G9 Led

Characteristic:
3000K - 330lm (Funnel S - M)


Ceiling rose detail



Suspension

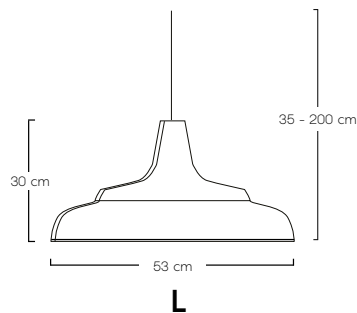

CE IP44 IP66



Material:
Poleasy

Finishing e colours:
IL: 110 transparent

Net weight:
3,5 kg (Funnel L)

VP: 162 dark pearl
150 light blue
500 rust
101 copper

Volume packaging:
0,15 mc (Funnel L)

Cable length:
2 mt black cable
6mt black cable with plug
(version portable, IP44)

Switch:
Connection box

Power Input:
220-240V 50/60Hz

Power Consumption:
1x 32W E27 (Funnel L)

Light source:
G9 Led
Bulb (Funnel L)

Characteristic:

L battery version

CE IP66

Material:
Poleasy

Finishing e colours:
IL: 110 transparent


Net weight:
3,5 kg

Volume packaging:
0,11 mc

Cable length:
1,5 mt cable rechargeable

Switch:
Remote control

CE IP20



Power Input:
Adaptor: AC: 100-240V 50/60Hz
DC: 5V

Power Consumption:
3,8W

Light source:
RGBW Led

Characteristic:
2700K - 65lm

Recharging method:
Lithium electric induction

Recharging time:
6 h.

Duration time:
8-10 h.