

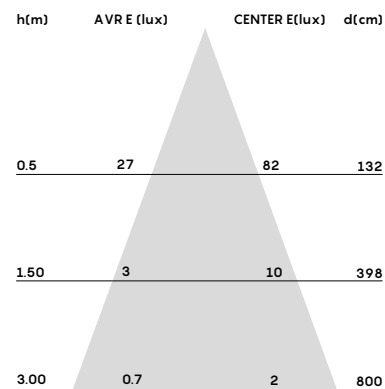
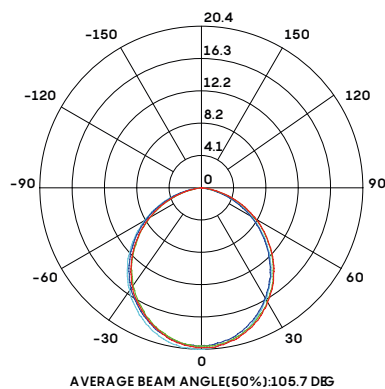


Suspension / portable with plug



Material:
Poleasy

Net weight:
1 kg (Bell S)

Volume packaging:
0,018 mc (Bell S)

Finishing e colours:
IL: 110 transparent

VP: 162 dark pearl
150 light blue
500 rust
101 copper

Cable length:
2 mt black cable
6mt black cable with plug
(version portable, IP44)

Switch:
Connection box

Power Input:
220-240V 50/60Hz

Power Consumption:
5W (Bell S)




Light source:
G9 Led

Characteristic:
3000K - 330lm (Bell S)

Ceiling rose detail



Suspension / portable with plug

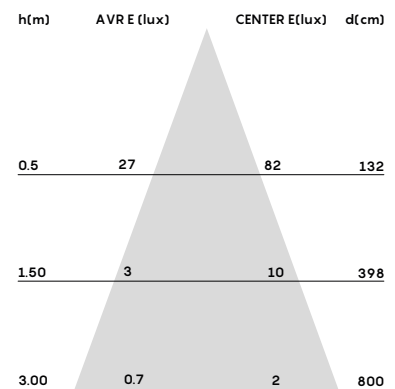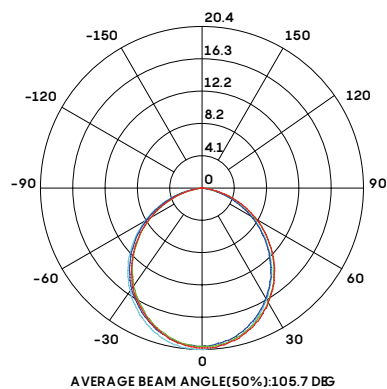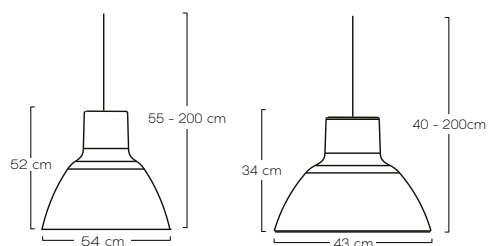

CE IP44 IP66



Material:

Poleasy

Net weight:

2 kg (Bell M)
3,5 kg (Bell L)

Volume packaging:

0,070 mc (Bell M)
0,15 mc (Bell L)

Finishing e colours:

IL: 110 transparent

VP: 162 dark pearl

150 light blue

500 rust

101 copper

Cable length:

2 mt black cable
6mt black cable with plug
(version portable, IP44)

Switch:

Connection box (IP 66)

Power Input:

220-240V 50/60Hz

Power Consumption:

1x 32W E27 (Bell M - L)

Light source:

G9 Led
Bulb (Bell L)

Characteristic:

M - L battery version

CE IP66

Material:

Poleasy

Net weight:

3,5 kg

Volume packaging:

0,11 mc

Finishing e colours:

IL: 110 transparent

Cable length:

1,5 mt cable rechargeable

Switch:

Remote control

CE IP20



Power Input:

Adaptor: AC: 100-240V 50/60Hz
DC: 5V

Power Consumption:

3,8W

Light source:

RGBW Led

Characteristic:

2700K - 65lm

Recharging method:

Lithium electric induction

Recharging time:

6 h.

Duration time:

8-10 h.