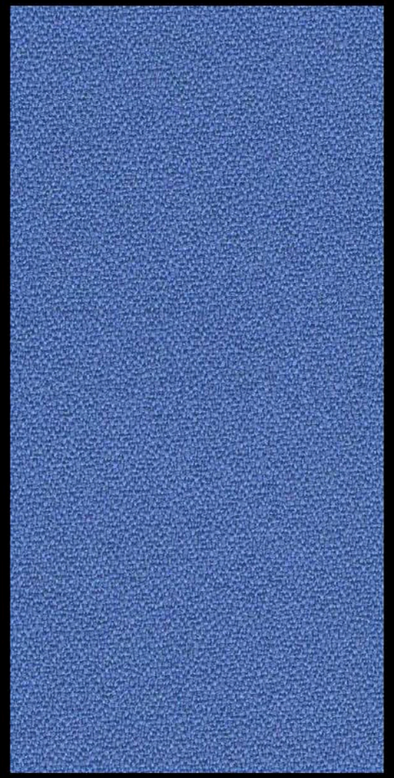
MAHORA
CONCEPT

NUANCIER

Retrouvez dans la table des matières, page suivante, votre produit ainsi que les matériaux et les coloris dans lesquels il est disponible.


Attention : les coloris peuvent varier selon les réglages et la luminosité de votre écran.
Un doute ? Une question ? Contactez-nous au 01 87 124 124




Xtreme

cat. A

100% recycled polyester FR
Flame retardant - 100.000 Martindale


Parasol YS073


Ocean YS100



Campeche YS074


Montserrat YS011


Krabi YS141



Twister YS083


Jamaica YS027


Tortuga YS168


Scuba YS082



Costa YS026


Navassa YS162


Martinique YS004


Bluefield YS021


Appledore YS077


Apple YS096


Taboo YS045



Tonga YS160


Windjammer YS047


Osumi YS171


Steel YS095


Blizzard YS081



Slip YS094


Padang YS145



Panama YS079


Tokara YS136


Calypso YS106


Diablo YS101


Tobago YS030


Bluebell YS097


Cayman YS024


Leeward YS164



Curacao YS005


Orchilla YS167



Bridgetown YS102


Mauve YS069


Tarot YS084



Anguilla YS169



Sombrero YS046


Rum YS173


Manado YS166


Aruba YS108



Solano YS072


Lobster YS076


Sandstorm YS071


Nougat YS091


Bounty YS086


Havana YS009


Arawak YS016

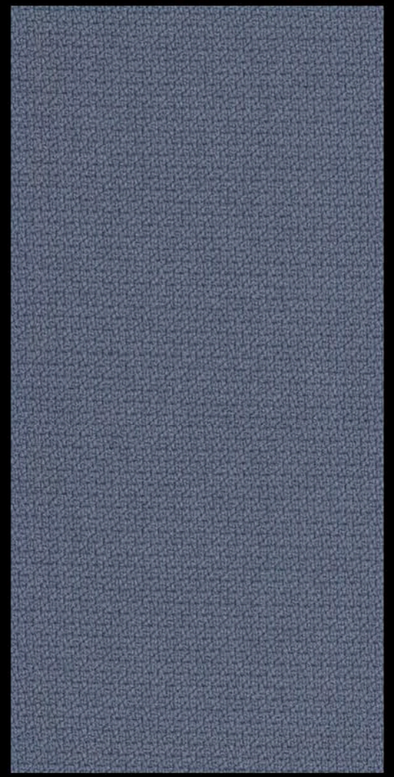
Xtreme

cat. A

2018

Technical details

Composition	100% recycled polyester FR
Weight	Gr./m^2 310
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard DIN 4102-B1 NF D 60-013 UNI 9175 Classe 1 IM BS 476 Part 7 Class 1
Environment	Certified to the EU Ecolabel Certified to OEKO-TEX® Standard 100 Made from 100% recycled polyester



Step

cat. A


100% Trevira CS
Flame retardant - 100.000 Martindale


60004


66019


63012


63075


65090


65091


68158


68118


60999


60091


60011



60090



61149


61102


64180


64179


64177


64013


65018


66152


66148


66018



66151



68159


68160


68161


68163


68162



62057


61103


61150


60021


63082


65092


65023


65047


65093



65094



65011


67004


67072


67073


67007


68120


68121


62073


68164


68165

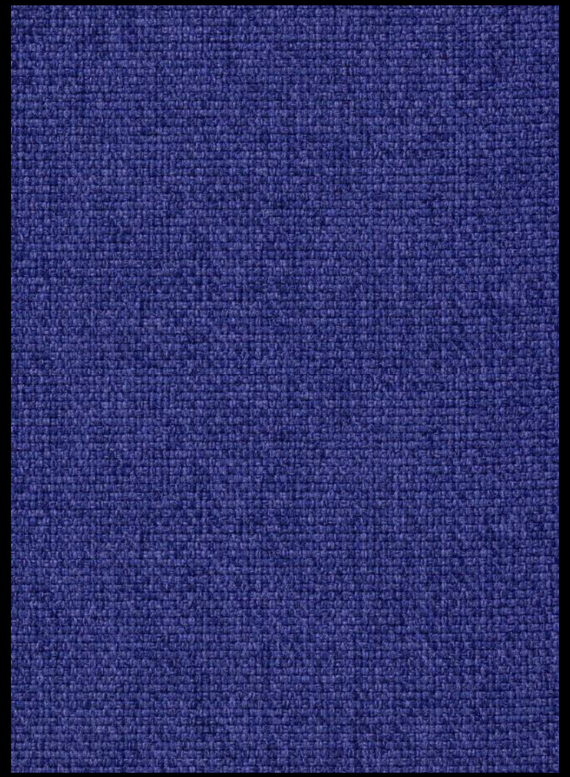
Step

cat. A

Technical details

Composition	100% Trevira CS
Weight	Gr./ml. 470
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO DIN 4102 B1 NFP 92-503/504/505 M1 BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & match BS 5852 Crib 5 ÖNORM B 3825-B1-3800-Q1 UK FAR/JAR 25.853 (a) (i) (ii) BS 7176 Medium hazard AM 18 - NF D 60-013-(only for fabric) CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME DIN EN 13501-1 B-s1,d0
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals


2018



Medley

cat. A

100% polyester
Flame retardant - 75.000 Martindale


66008


60004


60999



60003


61002


61003


61004


61189



62054


62002


67002


63013


63017



63016


64019



64125



64123



65011



65012


66145


67052


66009


66010


67006


66007


68114


68002


68005

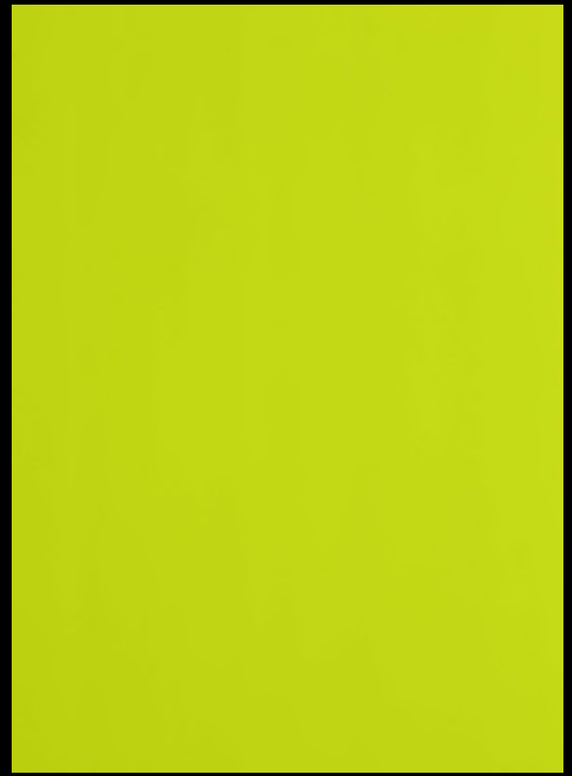
Medley

cat. A

Technical details

Composition	100% polyester
Weight	Gr./ml. 510
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Part 1 0,1 Cigarette & match BS 476 Part 7, class 2 Class Uno UNI 9175 Class 1 I EMME Class Uno UNI 9174 - UNI 8457 ÖNORM B 3825-B2-3800-Q1 UK CA TB 117-2013 ASTM E 84
Environment	Oeko-Tex 100 certified 100% free of heavy metals

2018




Mood

cat. A

72% PVC - 25% cotton - 3% polyurethane
Flame retardant - 50.000 Martindale


1


2



3



4


5


6


7


8



9


10


11



12


13


14


15



16


17


18


19


20



21



22



23


24


25


26


27


28

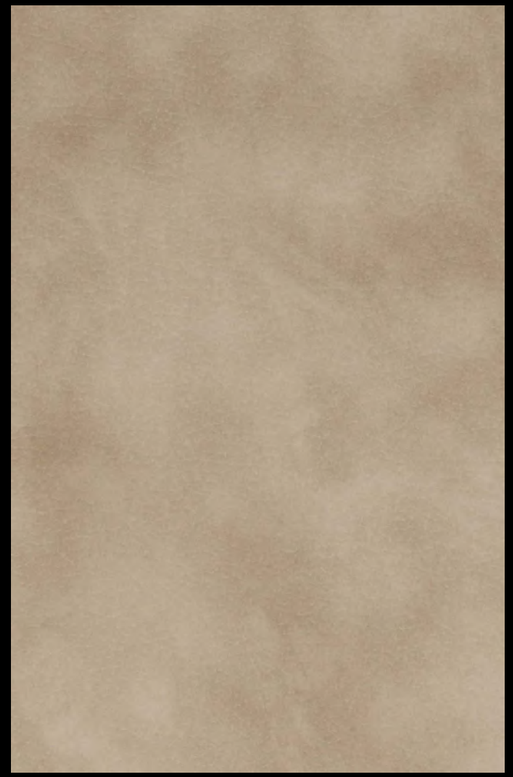
Mood

cat. A

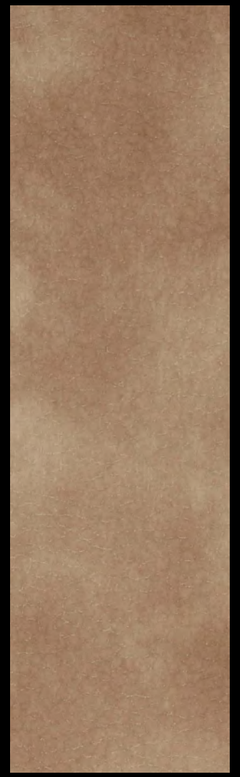
Technical details

Composition	72% PVC - 25% cotton - 3% polyurethane
Weight	Gr./m^2 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Lightfastness	ISO 105-B02: 6
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO resolution A.652 (16): 1989 BS 5852 crib 5 BS 5852-1 part I EN 1021-2 UNI 9175 CLASSE 1 IM TB 117 sez. E – p.1 (California)
Treatment	VINYZENE: an anti-microbial and anti-mould agent certified by **Bio-Pruf**
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to UV rays Resistance to mould and bacteria Outdoor

2018



1001



1002



1003

Crazy

cat. A

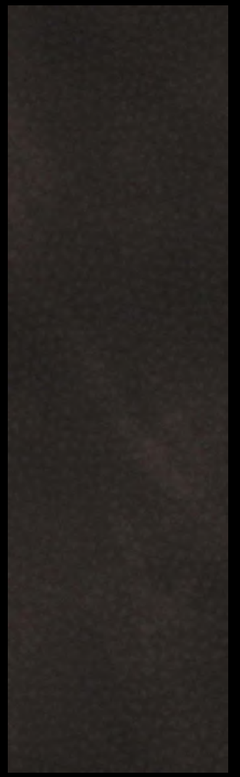
80% PVC - 18% polyester - 2% polyurethane
Flame retardant - 50.000 Martindale



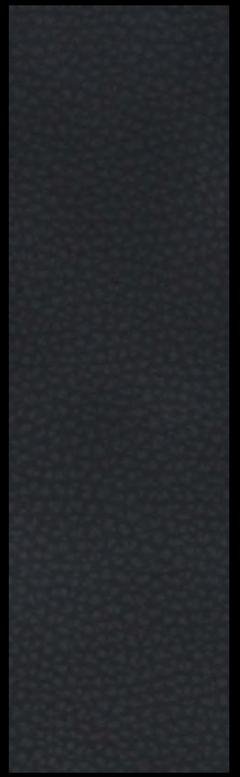
1004



1005



1006



1007

Crazy

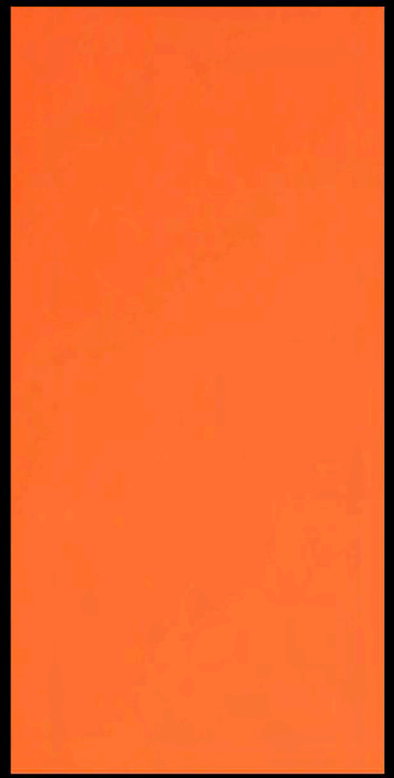
laCividina

cat. A

Technical details

Composition	80% PVC - 18% polyester - 2% polyurethane
Weight	Gr./m^2 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	UNI 9175: classe 1IM EN 1021-2
Features	Comfort and elasticity Tear strength Easy to clean Waterproof Fire resistance


2018



Extrema

cat. B

63% polyurethane - 29% cotton - 8% polyester
Flame retardant - 150.000 Martindale


450

3650


3750


150


250


350


1150


3250


750


1250


1350


2850


2750


4850


1050


950


850


4350


4050


3550


3150


550


650


2350


2950


2450


1650


3950


1550


1450


4650


3850


4550


4150


3350


4750


2550



1850


2650


1950



4250


1750


3050


3450


2050


4450


2150


2250

Extrema

cat. B

2018

Technical details


Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m^2 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5/6
Solidity to sweat	ISO 105-E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E – p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free




Ikon

cat. B

63% polyurethane - 29% cotton - 8% polyester
Flame retardant - 150.000 Martindale


130


230



330



430



530



630



730


830


930


1030


1130


1230



1330


1430


1530


1630


1730



1830



1930


2030


2130


2230


2330


2430

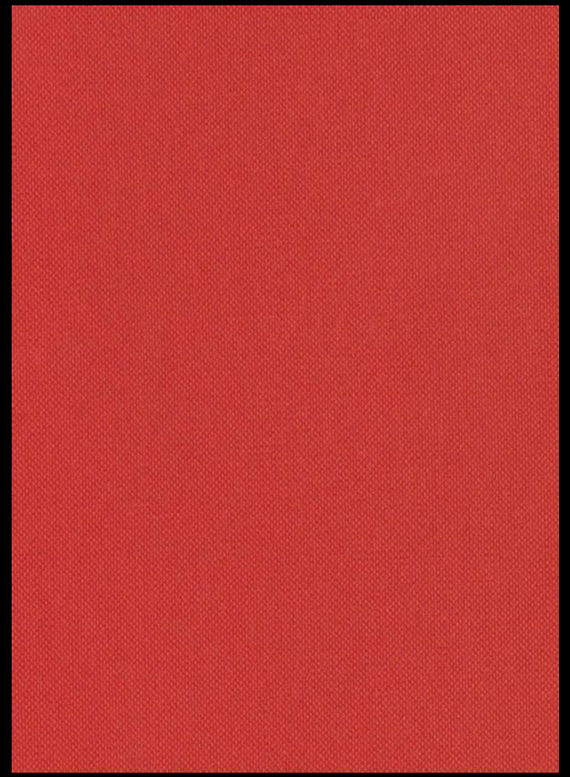
Ikon

cat. B

Technical details

Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m^2 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105 B02: 5/6
Solidity to sweat	ISO 105 E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E - p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free

2018





Silvertex

cat. B

Vinyl Urethane Topcoat and 100% Polyester Hi-Loft2
Flame retardant - 300.000 Martindale



4004 ice



1077 cream


1051 sisal


1010 beige


0009 taupe


6065 safran


6062 melon


2003 cobre


6061 mandarin



2011 red



2064 wine


0005 mocca


0073 luggage



5008 pistacho


5020 basil


5063 forest


2016 raspberry


4001 plata


12526 tempesta


9002 carbon


13138 black


3066 baltic


3067 delft


3007 sapphire


4024 meteor

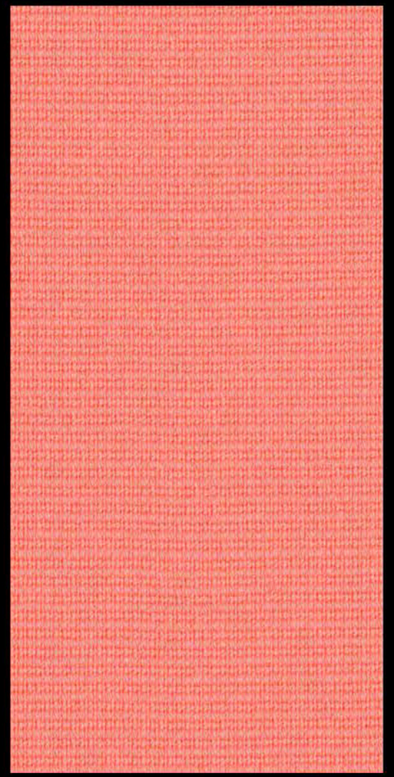
Silvertex

cat. B

Technical details

Composition	Content: 100% Vinyl Urethane Topcoat Backing: 100% Polyester Hi-Loft2
Weight	Gr./m^2 685
Abrasion test	Martindale - ISO 12947:1999 Part 2: 300.000 rubs
Flame retardant	UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) EN 1021 Part 1 & 2 UNE 23.727-90 1R/M.2 NF P 92-503/M2 DIN 4102 B2 ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 FMVSS 302 FAR 25/853 (MED) Marine Equipment Directive (in its current valid version) ECE R118 (replaces Directive 95/28/CE) EN 71-2:2006+A1:2007 - Safety of toys - Part 2: Flammability
Finishes and treatments	PERMABLOK3® SILVERGUARD® Anti-stain Finish Cold Crack -23°C Mildew resistant backing and face UV-Resistance XENOTEST DIN 54004/ NTC 1479 EN 71-3 Safety of Toys (Migration of certain elements) Sulfide Stain Resistant Anti-static Finish

2018



Fame

cat. B

95% wools of New Zealand - 5% polyamide
Flame retardant - 200.000 Martindale



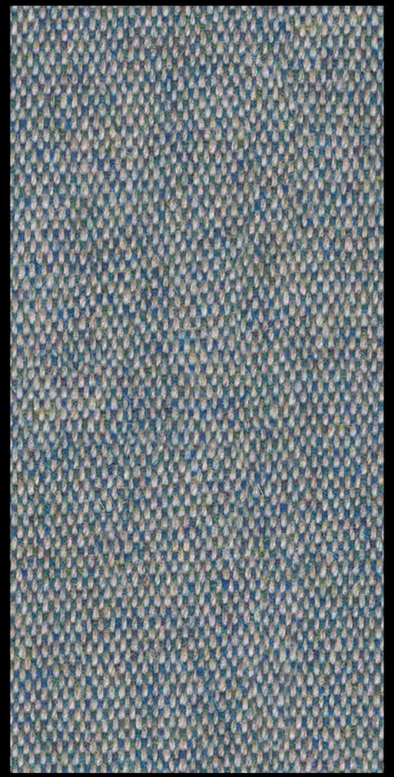
Fame

cat. B

Technical details

Composition	95% wools of New Zealand - 5% polyamide
Weight	Gr./ml. 630
Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Crib 5 CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME AM 18 - NF D 60-013 BS 5852 Part 1 0,1 Cigarette & Match ÖNORM B 3825-B1-3800-Q1 UK IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO BS 476 Part 7, class 1 DIN 4102 B1 (flame retardant) NF P 92-503 M2 (flame retardant) BS 7176 Medium hazard (flame retardant)
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

2018




Main Line Flax


cat. B


70% virgin wool - 30% flax
Flame retardant - 50.000 Martindale


Waterloo MLF21



Bethnal MLF25



Newbury MLF10



Westminster MLF22


Charing MLF27


Brompton MLF35


Holborn MLF05



Pimlico MLF34


Stanmore MLF37



Bayswater MLF24



Russell MLF38


Finsbury MLF30



Kensington MLF07


Goldhawk MLF31


Greenford MLF32



Monument MLF09


Farringdon MLF29



Tufnell MLF18



Highgate MLF33



Camden MLF26


Temple MLF16


Barbican MLF03



Tower MLF36


Archway MLF02



Morden MLF12


Lambeth MLF08



Upminster MLF20


Bank MLF23



Tooting MLF17


Leyton MLF13



Aldgate MLF01



Parsons MLF14



Kilburn MLF06



Euston MLF04



Hillingdon MLF41


Wembley MLF11


Northfields MLF40


Paddington MLF39


Stockwell MLF15


Edgware MLF28

Main Line Flax

cat. B

2018

Technical details

Composition	70% virgin wool - 30% flax
Weight	Gr./m^2 435
Abrasion test	Martindale - ISO 12947-2: 50.000 rubs
Lightfastness	ISO 105-B02: 5
Fastness to rubbing	ISO 105-X12: Wet 3 Dry 4
Flame retardant	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 UNI 9175 Classe 1 IM
Environment	Certified to the EU Ecolabel Made from wool and bast fibre



Trend

cat. C

82% PVC - 14% cotton - 4% polyester
Flame retardant - 50.000 Martindale


3150


3153


3152


3151



4152



3171


4696


3156


3159


3158


3160


4166


3165


4156


4161


4168


3176


4165


3166


3175


3163


4699



3161


4163


4701


4164


3169


3170

Trend

cat. C

Technical details

Composition	Content: 82% PVC Backing: 14% cotton - 4% polyester
Weight	Gr./m^2 870
Abrasion test	Martindale - BS 5690: 50.000 rubs
Lightfastness	DIN 75202: 6/7
Fastness to rubbing	ISO DIN 54021: Wet 5 Dry 5
Flame retardant	DIN 75200 B1AT MVSS 302 DIN EN 1021 Parte. 1+2 M2 BS 5852/CRIB5 5,3 CH CL. 1IM FAR 25853 IMO A. 652(16)
Features	Waterproof, unchangeable, anallergic Resistance to UV rays, sweat, ripping, saliva, urine, salt and chlorinated water Free of CD, AZO, FCKW, PCB, FORMALDEIDE and other substances dangerous for health

2018





Superb


cat. C

100% polyester FR
Flame retardant - 60.000 Martindale



101


103



104


109


143


142


141


131


132


134


135


136


137


138


111


112


113


114


116


117


118


124


128


127


126


125


129


130

145


145



146



149


144


140


139


105


106


108


110



119



120


121


122


123


153


152


151


150

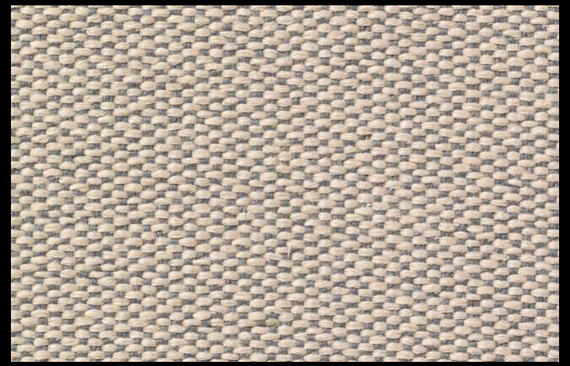

147

Superb

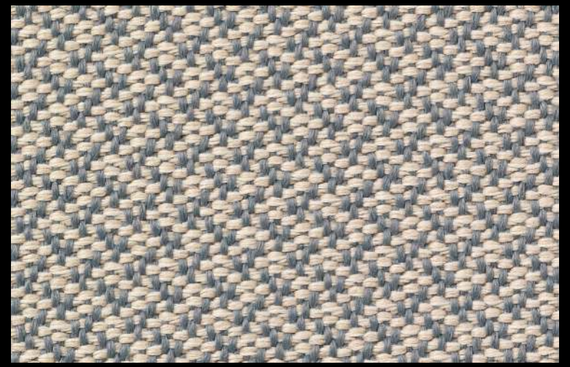
cat. C

Technical details

Composition	100% polyester FR
Weight	Gr./m^2 400
Abrasion test	Martindale - ISO 12947-2: 60.000 rubs
Lightfastness	ISO 105-B02: 5
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	EN 1021 1-2 UNI 9175 classe 1 IM UNI 9177 classe 1 BS 5852 crib 5 NF 92.503 M1 DIN 4102 B1
Features	Tear strenght Fire resistance Easy to clean



7048.01 P



7048.01 M

Deans

cat. C


100% polyester FR
Flame retardant - 110.000 Martindale




7048.02 P




7048.02 M




7048.03 P




7048.03 M




7048.04 P




7048.04 M




7048.05 P




7048.06 P




7048.06 M




7048.07 P




7048.07 M




7048.08 P




7048.08 M




7048.05 M




7048.09 P



7048.09 M



7048.10 P




7048.10 M




7048.11 P




7048.11 M




7048.12 P




7048.13 P




7048.13 M




7048.14 P




7048.14 M



7048.15 P



7048.15 M



7048.12 M

Deans

cat. C

Technical details

Composition	100% polyester FR
Weight	Gr./ml. 861
Abrasion test	Martindale - ISO 12947-2: 110.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4 ASTM D3511: 3
Fastness to rubbing	ISO 105-X12: Wet 4-5 Dry 4-5 AATC 8: Wet 5 Dry 5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1 Cal TB 117-2013
Features	Double faced upholstery, with a plain look on one side and a mélange pattern on the other side
Environment	Oeko-Tex 100 certified

2018




Remix 2


cat. Super


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale


113


123


133


143


152


163


173



183



223


233



242


252


362


373


383


393


412


422


433


443


452


543



612



632


643



653


662


672


682


692



722



733



743


762



773


783


823


842


852


873


912


923


933


942


954


962


973


982

Remix 2

cat. Super

2018

Technical details


Composition	90% new wool worsted - 10% nylon
Weight	Gr./ml. 415
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Flame retardant	AS/NZS 1530.3 AS/NZS 3837, class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 UNI 9175 1IM US Cal. Bull. 117-2013 ÖNORM B1/ Q1
Environment	Complies with EU ecolabel "The Flower"




Capture

cat. Super

85% wools of New Zealand - 15% polyamide
Flame retardant - 200.000 Martindale


4102


4001


4201


4803


5401


5402


5103


5102


4601


5501


4802


4301


5201


4902


5101


5301


4101


4702


4901



4801


4701


5002


4401


4501


5001

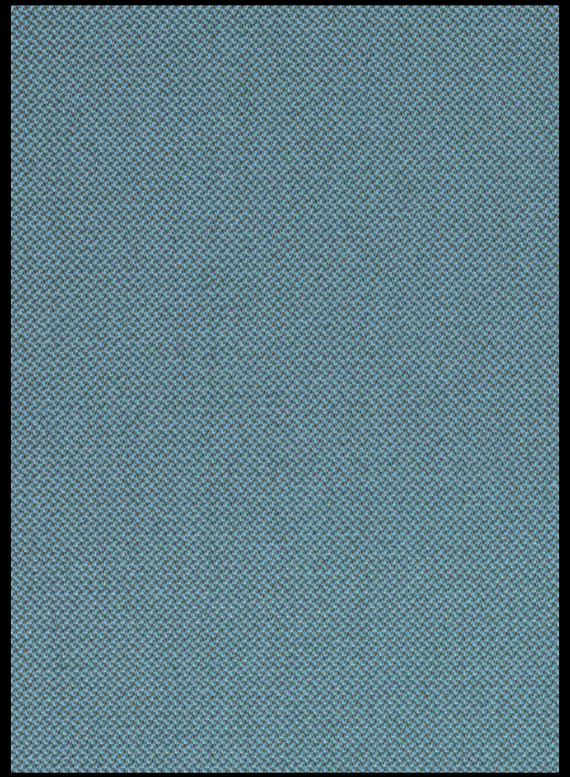
Capture

cat. Super

Technical details

Composition	85% wools of New Zealand - 15% polyamide
Weight	Gr./ml. 475
Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
Lightfastness	ISO 105 B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

2018



Revive 1

cat. Super


100% recycled polyester FR
Flame retardant - 60.000 Martindale


524



634


774



184


164


914


454


194


664



534


284



274



944


974


154


414


144


324


834


764


424


754


384


224


434

Recycled resource from PET bottles

Revive 1

cat. Super

Technical details

Composition	100% recycled polyester FR
Weight	Gr./ml. 420
Abrasion test	Martindale - ISO 12947-2: 60.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Flame retardant	BS 5852 Crib 5 with treatment DIN 4102 B1 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 with treatment ÖNORM B1/ Q1 UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Recycled resource from PET bottles

2018



Breeze Fusion

cat. Super

88% wools of New Zealand - 12% polyamide
Flame retardant - 100.000 Martindale


4003



4101


4102


4002


4503


4501


4804


4803



4103


4001


4004


4202


4104


4301


4303


4302


4401


4402


4502



4601


4602


4603


4604


4802


4201


4801

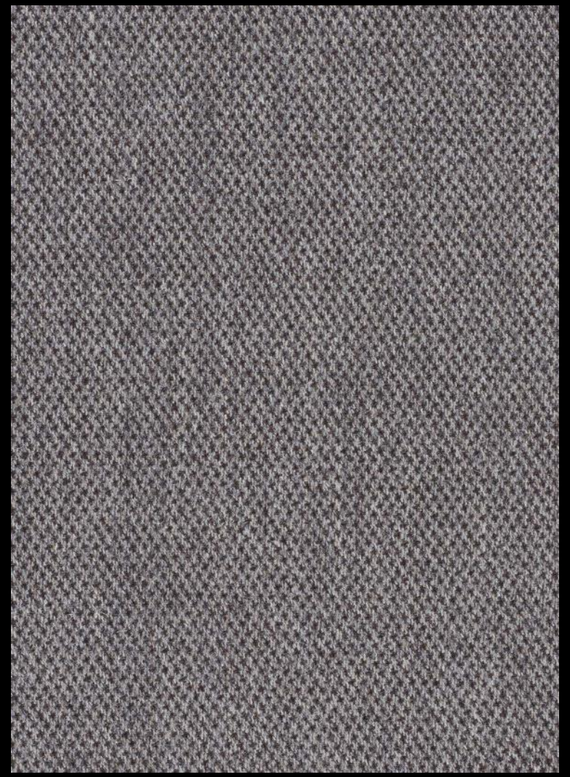
Breeze Fusion

cat. Super

Technical details

Composition	88% wools of New Zealand - 12% polyamide
Weight	Gr./ml. 590
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

2018




Molly


cat. Extra


100% new wool worsted
Flame retardant - 75.000 Martindale


110



122



164



192


112



114


116


152


154


160††


166


170


190


194


196

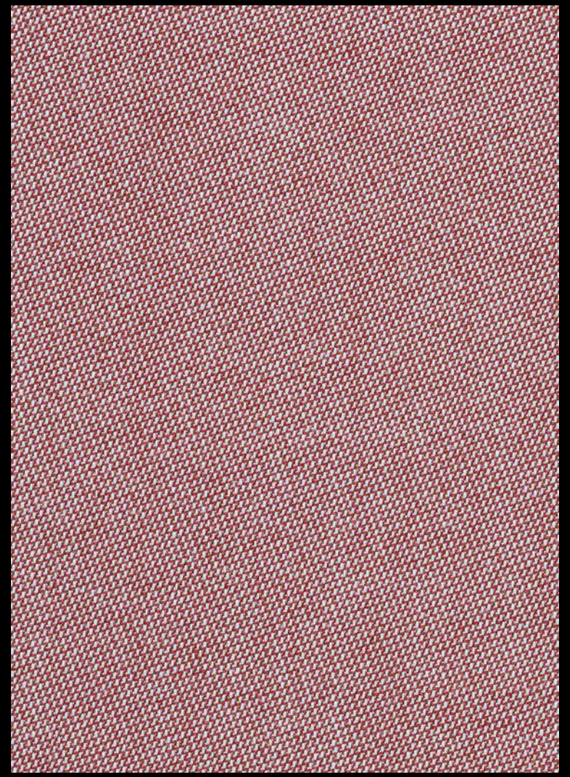
Molly

cat. Extra

Technical details

Composition	100% new wool worsted
Weight	Gr./ml. 690
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 4/7
Pilling	ISO 12945-2: 3/4
Flame retardant	EN 1021-1/2 DIN 4102 B2 ÖNORM B1/Q1 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013 NFPA 260 IMO FTP Code 2010: Part 8 BS 5852 part 1
Environment	Complies with EU ecolabel "The Flower"

2018





Rime

cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale



111



131


151



211



231


271


451



471



521


541


551



571



591


621



641


691


721


731


741


781


791


911


921


941


951


981


991

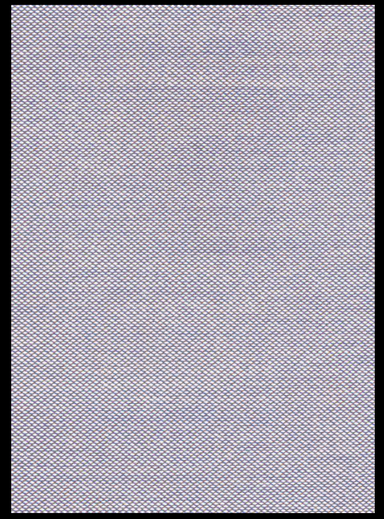
Rime

cat. Extra

Technical details

Composition	90% new wool worsted - 10% nylon
Weight	Gr./ml. 580
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/6
Pilling	ISO 12945-2: 4
Flame retardant	AS/NZS 3837, class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 ÖNORM B2/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"


2018




Steelcut Trio 3


cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale



105


113



124



133


153



176



195



205



213



246



253


266



276



283



336



376



383



416



426



446


453


466



476


515



526



533



553



576



616



636



645


666



686



713



716



746



756



776



796



806



883



906



946


953


966


976


983


996

Steelcut Trio 3

cat. Extra

2018

Technical details

Composition	90% new wool worsted - 10% nylon
Weight	Gr./ml. 770
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010: Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower" Greenguard and Greenguard Gold certified




Ariana

cat. Extra

100% mohair (base: cotton)
Flame retardant - 90.000 Martindale


7061.01


7061.02


7061.03


7061.05


7061.06


7061.07


7061.08


7061.09


7061.10


7061.11


7061.12


7061.13


7061.14


7061.17


7061.18


7061.19


7061.20


7061.21


7061.22


7061.23


7061.24


7061.27


7061.28


7061.29


7061.30


7061.31


7061.32


7061.35

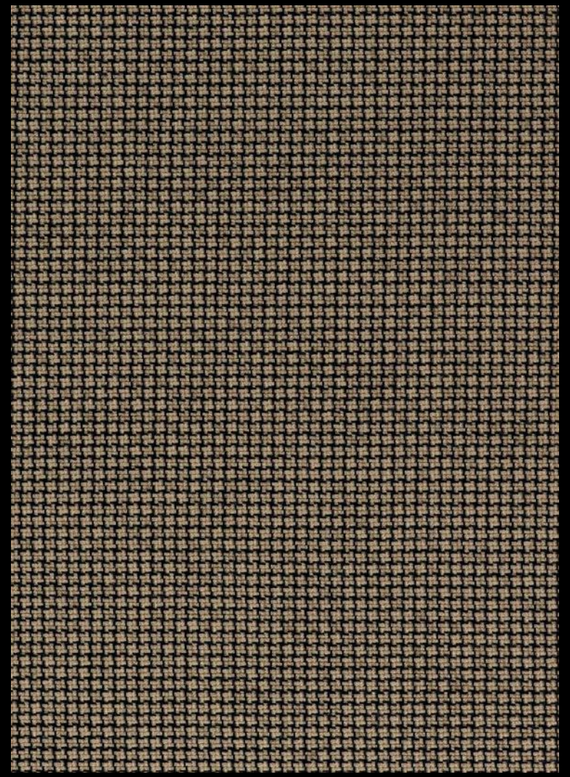
Ariana

cat. Extra

Technical details

Composition	100% mohair (base: cotton)
Weight	Gr./ml. 765
Abrasion test	Martindale - ISO 12947-2: 90.000 rubs Wyzenbeek - ASTM D4157: 100.000 double rubs
Lightfastness	ISO 105-B02: 5 AATCC 16.3: 40 hours: 3.5
Pilling	ISO 12945-2: 4/5 ASTM D3511: 5
Fastness to rubbing	ISO 105-X12: Wet 4-5 / Dry 4-5 AATCC 8: Wet 5 / Dry 5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92 / 503-507, M2 with FR finish DIN 4102, B2 UNI 9175, classe 1 IM Cal TB 117 NFPA 260, class 1 IMO 2010 FTP part 8
Environment	Cradle to cradle bronze certified
Cleaning	Dry clean only


2021





Colline

cat. Extra


75% new wool worsted - 17% acrylic - 8% nylon
Flame retardant - 100.000 Martindale


108



118



148


188



228


348


448


548


568


668


688


788

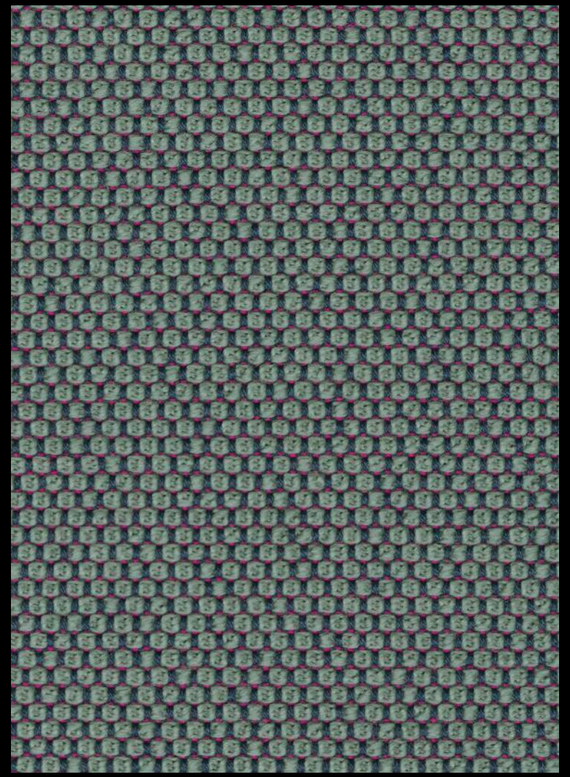
Colline

cat. Extra

Technical details

Composition	75% new wool worsted - 17% acrylic - 8% nylon
Weight	Gr./ml. 650
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Pilling	ISO 12945-2: 4/5
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Natural fibres / Sustainable resource

2018




Opera


cat. Extra


96% virgin wool - 4% polyamide
Flame retardant - 90.000 Martindale



mirror


fango



pepper


ebony


prime


maple


navy


delphi



taupe


flanell


macadamia



calla



kristall



kies



anthrazit


rosewood



sorbet


aureo



lake


brick



jade


bleu


delft


indio


guave


clementine


aloe


smaragd

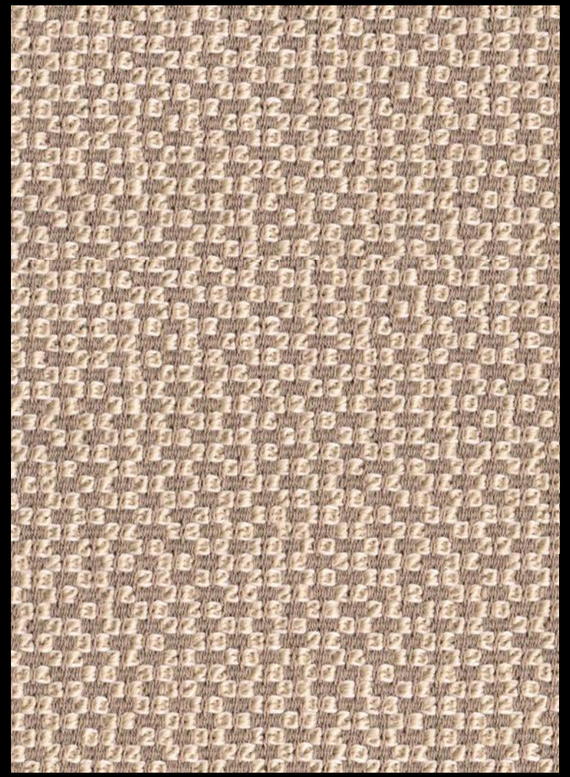
Opera

cat. Extra

Technical details

Composition	96% virgin wool - 4% polyamide
Weight	Gr./ml. 1010
Abrasion test	Martindale - ISO 12947-2: 90.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3

2018



Dante

cat. Extra

95% virgin wool - 5% polyamide
Flame retardant - 52.000 Martindale


passion


litchi


lava


terra



curry


tivoli


tropic


jaspis


viola


pepper


graphit


lanoso


black


rosewood


coffee


prime


crisp


taupe


flanell


kies


chrom


almond


snow


angora

Dante

cat. Extra

Technical details

Composition	95% virgin wool - 5% polyamide
Weight	Gr./ml. 920
Abrasion test	Martindale - ISO 12947-2: 52.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3

2018



Arco

cat. Extra

95% virgin wool - 5% polyamide
Flame retardant - 70.000 Martindale


cloud


biber


coast


sepia


lanoso


black


ebony


muskat


fossil


taupe


flanell



calla


snow


jasmin


bast


limette


safran


coral


granat


heart



blackberry


henna


cassis


elegant


velvet


zinn


opal


monte

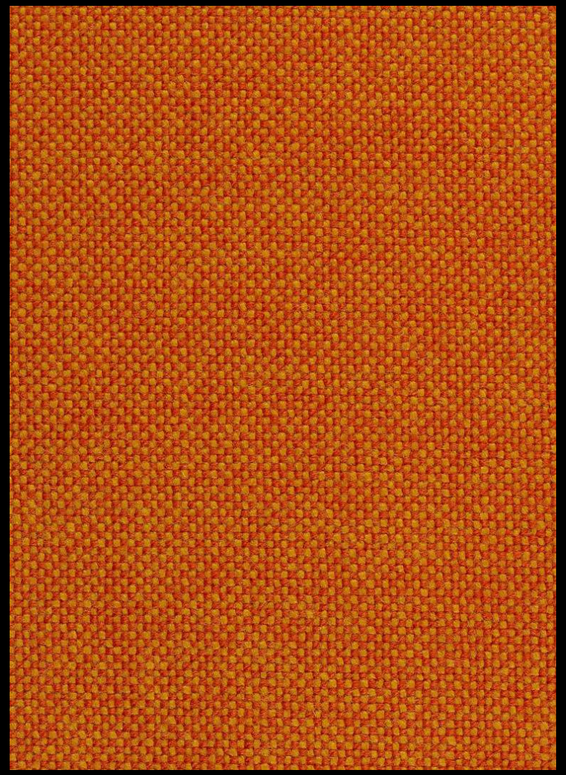
Arco

cat. Extra

Technical details

Composition	95% virgin wool - 5% polyamide
Weight	Gr./ml. 980
Abrasion test	Martindale - ISO 12947-2: 70.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 IMO: 2014/90/EU Marine Equipment Directive NF D 60-013 (Art. AM 18)
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3


2018





Hallingdal 65


cat. Maxi


70% new wool - 30% viscose
Flame retardant - 100.000 Martindale



100



103


110


113


116



123


130



190


200



220


227


270



368


370


547


563


573


590


600


657


674



750


753


754



763



764


773


810


143


153



166



173


180


376



407



420


457


526


680



687


702



723


733


840


850


890


960


980

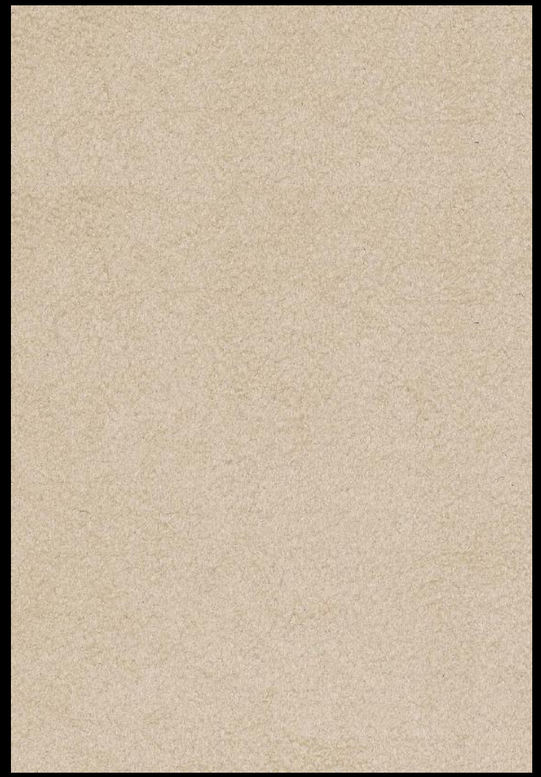
Hallingdal 65

cat. Maxi

Technical details

Composition	70% new wool - 30% viscose
Weight	Gr./ml. 795
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"


2018



Comfort


cat. Maxi


88% polyester - 12% polyurethane
Flame retardant - 150.000 Martindale



63001


64002


64001


66002


1124


66008


5


10


62003


1566


4



61002


64003


1414


29



64009


65003


1043


40


35


67001


8422


8384



280


62004


68001


68003


68011



8397


9084



60005


60002


60003


1012


49


50

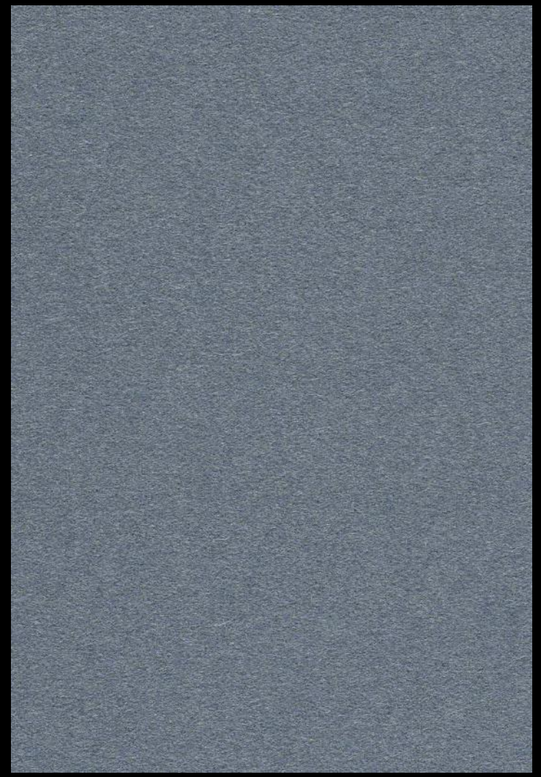
Comfort

cat. Maxi

Technical details

Composition	88% polyester - 12% polyurethane
Weight	Gr./ml. 385
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4-4/5 Dry 4-4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 cigarette ÖNORM B 3825-B2-3800-Q1 UK NF P 92-503 M3 Class Uno UNI 9175 Class 1 IM CA TB 117-2013
Environment	Oeko-Tex 100 certified 100% free of heavy metals Environmentally friendly – contains 37% recycled fibres
Features	Permanently antistatic – contains carbon fibres Dirt-resistant – water and oil repellent Easy to clean – stands intensive cleaning Permanently fire-resistant – contains fire-retardant fibres Stretchable – superior upholstering properties


2018




Divina 3

cat. Maxi

100% new wool
Flame retardant - 45.000 Martindale


106


154


171



356



384



393



652



666


676


756


782


791


173



181


191



224



246


346


444



462



536


542


623



636


686


691


692


696


712


742


826


846


876


922


936


956

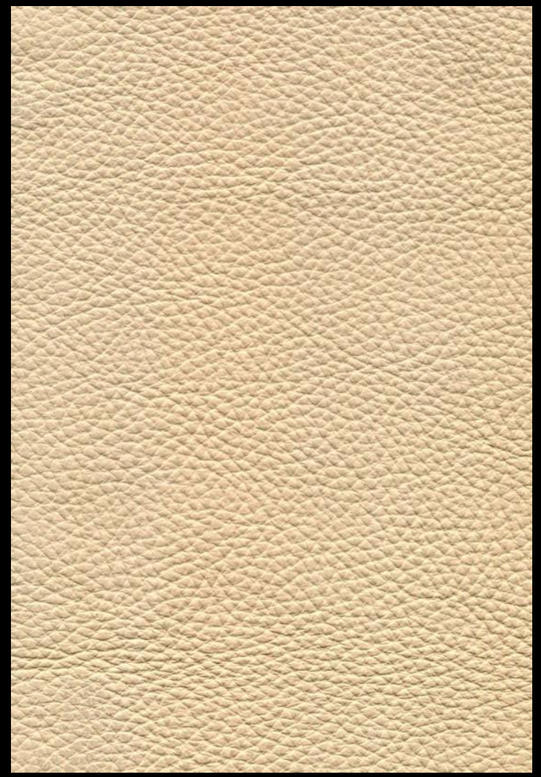
Divina 3

cat. Maxi

Technical details

Composition	100% new wool
Weight	Gr./ml. 840
Abrasion test	Martindale - ISO 12947-2: 45.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 BS 5852 Crib 5 BS 5852 part 1 BS 5867 part 2 type B DIN 4102 B2 EN 1021-1/2 EN 13501, C-s1, d0, glued IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013 ÖNORM B1/ Q1
Environment	Natural fibres / Sustainable resource

2018



Lux 1

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm


400


60


455


471


439


438


453


454


408


421


404


448


437


62


478


423


402


472


424


444


441


426


425


452


456


63


427


403



446


428



451


429


449


412


431


413

Lux 1

cat. Lux

Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.3 / 1.5 mm
Lightfastness	ISO 105-B02: 7 blue scale
Tear strenght	ISO 3377-1: 89 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 4/5 grey scale Dry 500 cycles value 4 grey scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11644: 9,3 N/cm
Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette Test N°1:Match Test TB 117-A11: Cigarette Test (California)

2018



Lux 2

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 0.9/1.1 mm


810

811

812


835


830


832


839


843


842


856


851


855


815


826


836


837


838


834


818


819


820


823


822


824


847


844


845


825


852


853


854


827


860


859


858


864

Lux 2

cat. Lux

Technical details

Origin	Raw hides
Place of origin	European
Thickness	0.9 / 1.1 mm
Lightfastness	ISO 105-B02: 7 blue scale
Tear strenght	ISO 3377-1: 56 N/mm
Fastness to rubbing	ISO 11640: Wet 150 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 20.000 cycles
Adhesion of finish	ISO 11644: 5 N/cm
Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette test N°1:Match test IMO FTP: Part 8-resolution A.652 (16) TB 117-A11: Cigarette test (California)

2018



Imperial 1


cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm


720


724


727


731


721


722


723


735


725


726


728


729


730


732


733


734

Imperial 1

cat. Imperial

2018

Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.3 / 1.5 mm
Lightfastness	ISO 105-B02: 8 blue scale
Tear strenght	ISO 3377-1: 121 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 4 grey scale Dry 500 cycles value 4/5 grey scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11644: 13.4 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)



Imperial 2

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.1 / 1.2 mm


500


501



502


520


522


524


540


541


542


N46


558


560


504


526


505


508


510


512


N47


N98


531


532


536


538



543


546


549


547


553


557


561


564


565


566


567


569

Imperial 2

cat. Imperial

2018

Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.1 / 1.2 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 28 N/mm
Fastness to rubbing	ISO 11640: Wet 80 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 25.000 cycles
Adhesion of finish	ISO 11644: 7.5 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)



Nabuk

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.4 / 1.6


45


5


66


28


12


17


18


75


46


57


44


48


35


15


11


16


27


25


67


59


14


26


37



68


29


30


53


74


61


50


47


19


13


60


49


69

Nabuk


cat. Imperial

Technical details

Origin	Raw hides
Place of origin	Italy
Thickness	1.4 / 1.6 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 126 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 3/4 gray scale Dry 500 cycles value 3/4 gray scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11640: 5 N/cm
Flame retardant	BS 5852 cigarette and macth test Classe 1 IM
Features	Water repellent treatment Easy to clean Soft touch

2018






lollipop




winegum



candybar



menthol



peppermint




popsicle




pastille




pistachio




candycane




popcorn




cottoncandy




tumtum




bonbon



machron




toffee




cookie



meringue



salt



bitter



licorice

Drop

cat. Special

60% wool - 20% polyamide - 20% polyester
Flame retardant - 80.000 Martindale

Drop

cat. Special

2018

Technical details

Composition	60% wool - 20% polyamide - 20% polyester
Weight	Gr./m^2 600
Abrasion test	Martindale - ISO 12947-2: 80.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4
Flame retardant	EN 1021-1/2 cigarette & match BS 5852 part 1 cigarette & match DIN 4102-B2 surface ignition US Cal. Tech. Bull. 117
Features	Stretch material
Environment	Oeko-Tex 100 certified Ecologically produced in Europe

MAHORA

CONCEPT

Mahora Concept
21 rue Gounod
92210 Saint-Cloud
01 87 124 124

www.mahora-concept.com