




NUANCIER

Retrouvez dans la table des matières, page suivante, votre produit ainsi que les matériaux et les coloris dans lesquels il est disponible.


**Attention : les coloris peuvent varier selon les réglages et la luminosité de votre écran.
Un doute ? Une question ? Contactez-nous au 01 87 124 124**

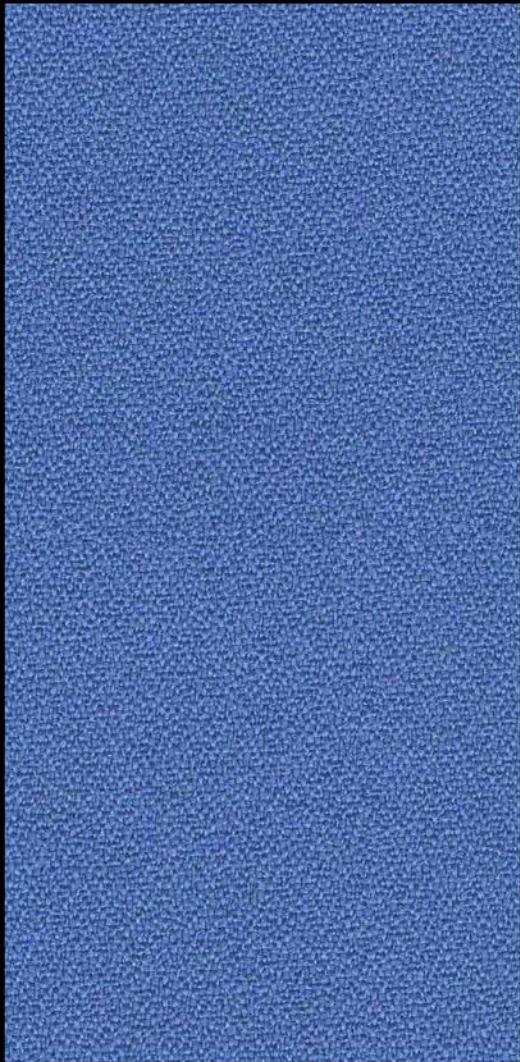

Xtreme

cat. A

100% recycled polyester FR
Flame retardant - 100.000 Martindale



Parasol YS073



Ocean YS100



Scuba YS082




Costa YS026




Navassa YS162



Martinique YS004



Bluefield YS021



Bluebell YS097



Cayman YS024



Leeward YS164




Curacao YS005




Orchilla YS167



Campeche YS074



Montserrat YS011




Appledore YS077



Apple YS096



Taboo YS045



Tonga YS160



Windjammer YS047




Bridgetown YS102



Mauve YS069



Tarot YS084



Anguilla YS169



Sombrero YS046



Krabi YS141



Twister YS083



Osumi YS171



Steel YS095




Blizzard YS081



Slip YS094



Padang YS145




Rum YS173




Manado YS166



Aruba YS108




Solano YS072



Lobster YS076



Jamaica YS027



Tortuga YS168



Panama YS079



Tokara YS136



Calypso YS106



Diablo YS101



Tobago YS030



Sandstorm YS071




Nougat YS091



Bounty YS086








Havana YS009



Arawak YS016

Technical details		
Xtreme cat. A 2018	Composition	100% recycled polyester FR
	Weight	Gr./m² 310
	Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
	Lightfastness	ISO 105-B02: 6
	Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
	Flame retardant	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard DIN 4102-B1 NF D 60-013 UNI 9175 Classe 1 IM BS 476 Part 7 Class 1
	Environment	Certified to the EU Ecolabel Certified to OEKO-TEX® Standard 100 Made from 100% recycled polyester

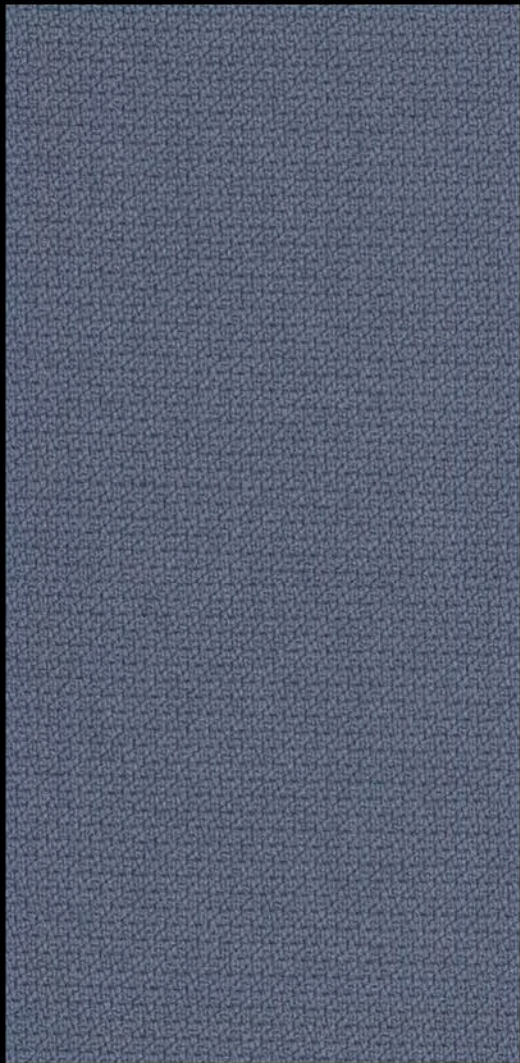

60004

66019

60999

60091

60011

60090

61149



62057

61103

61150

60021

63082



63012

63075

61102

64180

64179

64177

64013





65092

65023

65047

65093

65094



65090

65091

65018

66152

66148

66018

66151


65011

67004

67072

67073

67007



68158

68118

68159

68160

68161

68163

68162

68120

68121

62073

68164

68165

Step

cat. A

100% Trevira CS
Flame retardant - 100.000 Martindale

Step	Technical details	
	Composition	100% Trevira CS
	Weight	Gr./ml. 470
	Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
	Lightfastness	ISO 105-B02: 5/7
	Pilling	ISO 12945-2: 4/5
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
	Flame retardant	IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO DIN 4102 B1 NFP 92-503/504/505 M1 BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & match BS 5852 Crib 5 ÖNORM B 3825-B1-3800-Q1 UK FAR/JAR 25.853 (a) (i) (ii) BS 7176 Medium hazard AM 18 - NF D 60-013-(only for fabric) CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME DIN EN 13501-1 B-s1,d0
cat. A	Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals
	2018	



1001



1002




1003




1004



1005

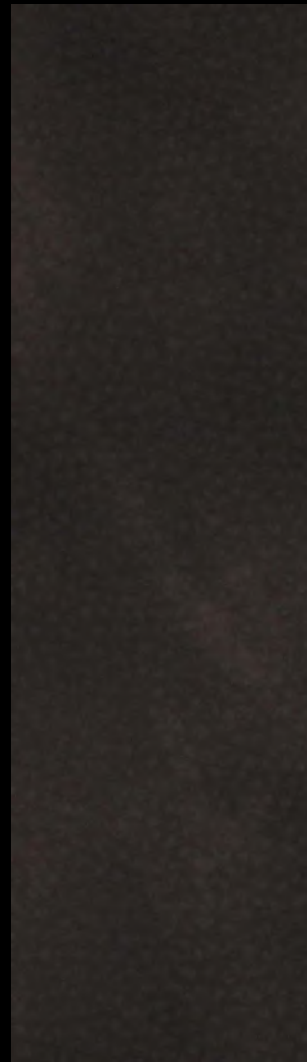

1006

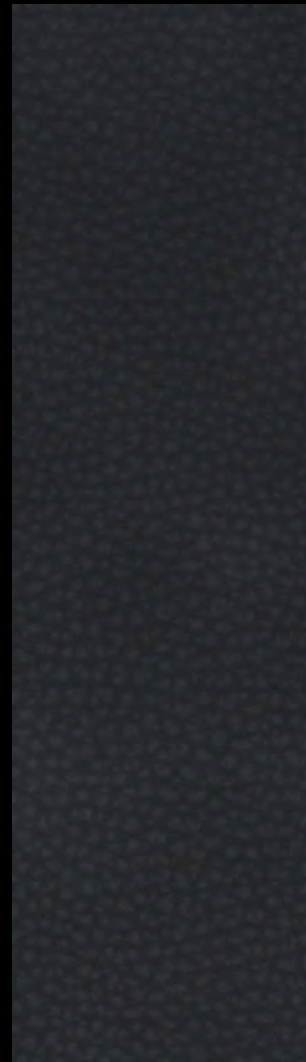


1007

Crazy

cat. A

80% PVC - 18% polyester - 2% polyurethane
Flame retardant - 50.000 Martindale

Crazy cat. A	Technical details	
	Composition	80% PVC - 18% polyester - 2% polyurethane
	Weight	Gr./m² 600
	Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
	Flame retardant	UNI 9175: classe 1IM EN 1021-2
	Features	Comfort and elasticity Tear strength Easy to clean Waterproof Fire resistance
	2018	

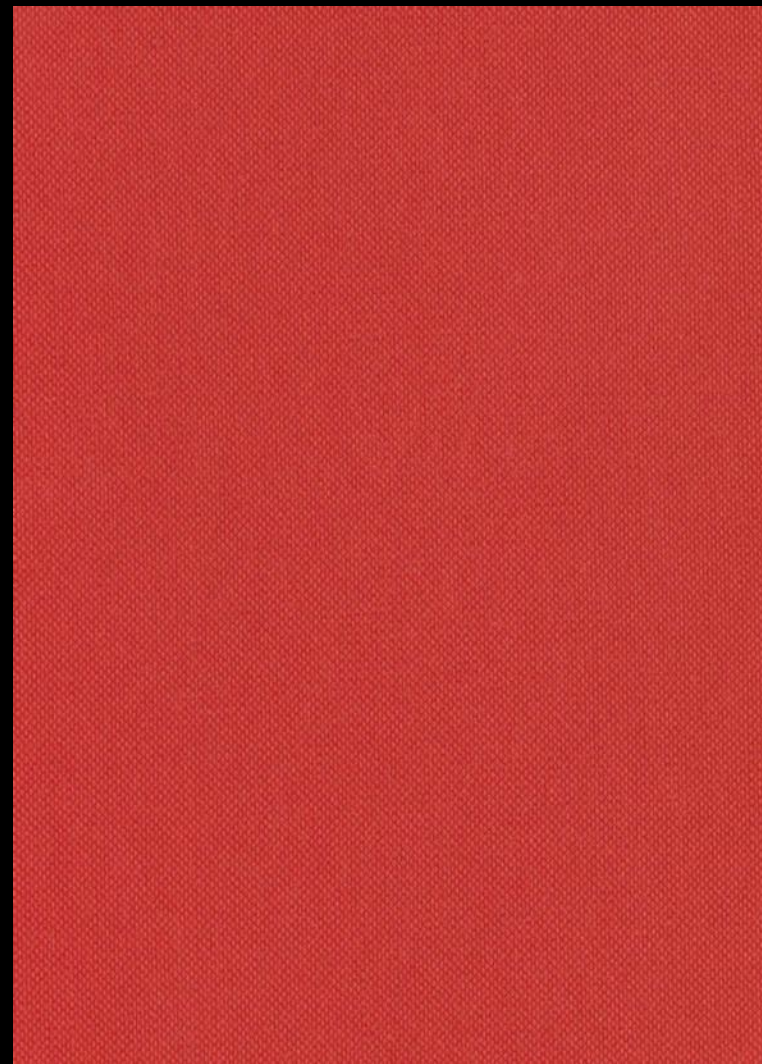

Silvertex

cat. B

Vinyl Urethane Topcoat and 100% Polyester Hi-Loft2
Flame retardant - 300.000 Martindale



4004 ice



1077 cream




1051 sisal




1010 beige




0009 taupe



6065 safran



6062 melon



2003 cobre



6061 mandarin



2011 red



2064 wine



0005 mocca



0073 luggage



5008 pistacho



5020 basil



5063 forest



2016 raspberry



4001 plata



12526 tempesta



9002 carbon



13138 black



3066 baltic



3067 delft




3007 sapphire



4024 meteor

Technical details

Composition	Content: 100% Vinyl Urethane Topcoat Backing: 100% Polyester Hi-Loft2
Weight	Gr./m² 685
Abrasion test	Martindale - ISO 12947:1999 Part 2: 300.000 rubs
Flame retardant	UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) EN 1021 Part 1 & 2 UNE 23.727-90 1R/M.2 NF P 92-503/M2 DIN 4102 B2 ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 FMVSS 302 FAR 25/853 (MED) Marine Equipment Directive (in its current valid version) ECE R118 (replaces Directive 95/28/CE) EN 71-2:2006+A1:2007 - Safety of toys - Part 2: Flammability
Finishes and treatments	PERMABLOK3® SILVERGUARD® Anti-stain Finish Cold Crack -23°C Mildew resistant backing and face UV-Resistance XENOTEST DIN 54004/ NTC 1479 EN 71-3 Safety of Toys (Migration of certain elements) Sulfide Stain Resistant Anti-static Finish

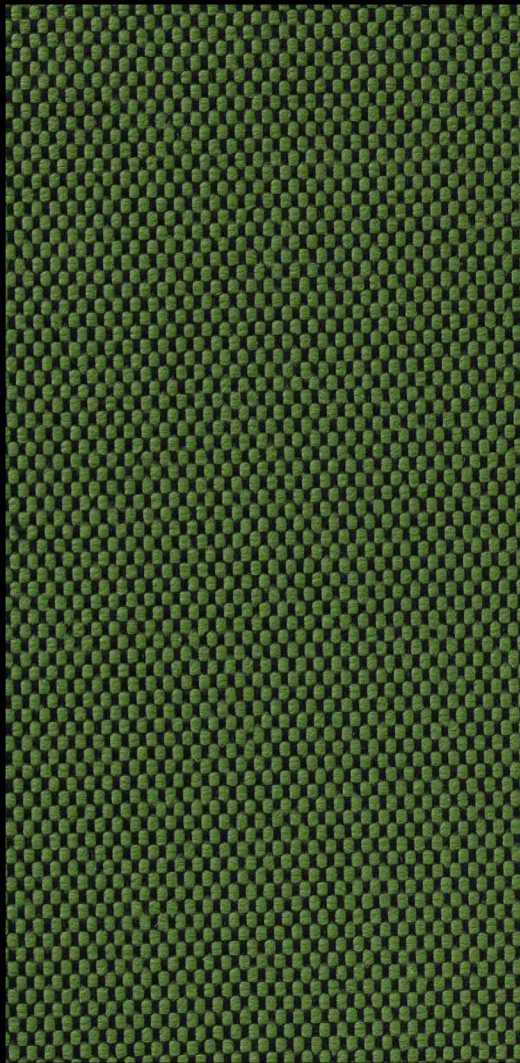


Samar

cat. B

100% polyester FR
Flame retardant - 50.000 Martindale




7052.01




7052.02



7052.04



7052.05




7052.07




7052.08




7052.09



7052.10



7052.11



7052.12




7052.13



7052.14




7052.16



7052.17




7052.19



7052.21




7052.22




7052.23




7052.24




7052.25




7052.26



7052.27




7052.29




7052.30




7052.33




7052.34




7052.36




7052.38



7052.39




7052.40




7052.41




7052.42




7052.43



7052.44




7052.45




7052.46




7052.47



7052.49




7052.50



7052.51

Samar		Technical details	
	Composition	100% polyester FR	
	Weight	Gr./ml. 660	
	Abrasion test	Martindale - ISO 12947-2: 50.000 rubs	
	Lightfastness	ISO 105-B02: 6	
	Pilling	ISO 12945-2: 4/5	
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5	
	Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1	
	Environment	Oeko-Tex 100 certified	
cat. B		2018	

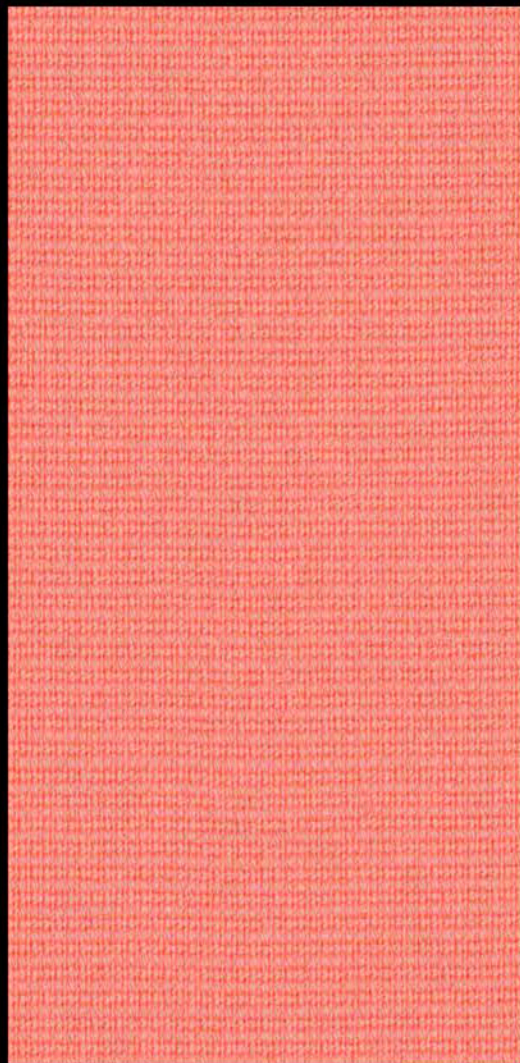


Fame

cat. B


95% wools of New Zealand - 5% polyamide
Flame retardant - 200.000 Martindale



60005



60078



61136



61135



60017



61060



60019



60051




61003



61047




61044



64167



64169



64165



63016




64119



64089



64058



65082



64055




65084



66130



66131



66075




66032




67068




66133



67016



67004



68147



68145



68035




67069




67067



68143



67005




62067



62068



68004



68148

Fame

Composition

95% wools of New Zealand - 5% polyamide

Weight

Gr./ml. 630

Abrasion test

Martindale - ISO 12947-2: 200.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Fastness to rubbing

ISO 105-X12: Wet 4/5
Dry 4/5

Flame retardant


BS EN 1021 1&2 Cigarette and Match
BS 5852 Crib 5
CA TB 117-2013
Class Uno UNI 9175 Class 1 I EMME
AM 18 - NF D 60-013
BS 5852 Part 1 0,1 Cigarette & Match
ÖNORM B 3825-B1-3800-Q1 UK
IMO MSC 307(88) Annex 1 part 8
MED Certificate IMO
BS 476 Part 7, class 1
DIN 4102 B1 (flame retardant)
NF P 92-503 M2 (flame retardant)
BS 7176 Medium hazard (flame retardant)

Environment

Oeko-Tex 100 certified
EU Ecolabel
100% free of heavy metals

cat. B

2018

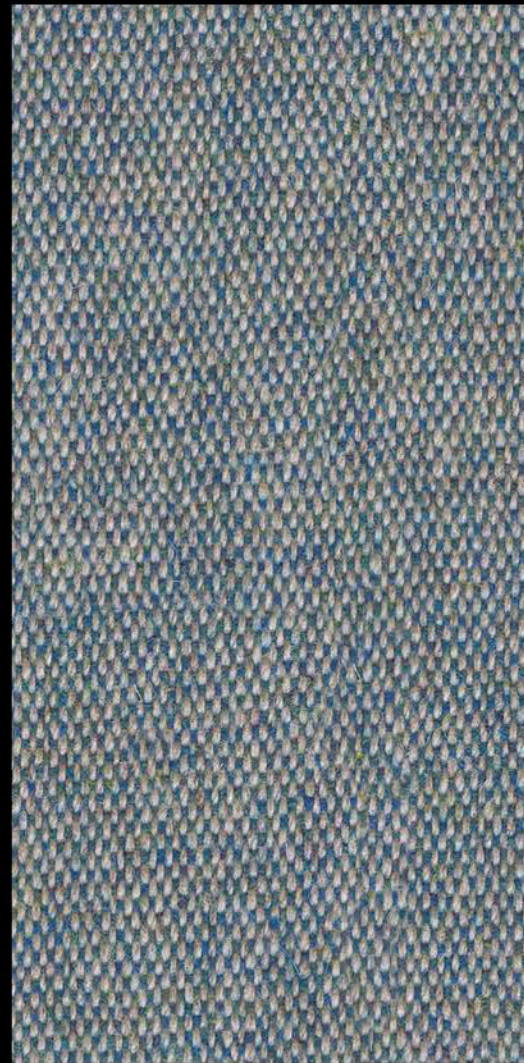

Main Line Flax

cat. B


70% virgin wool - 30% flax
Flame retardant - 50.000 Martindale



Waterloo MLF21



Bethnal MLF25




Newbury MLF10




Westminster MLF22




Charing MLF27




Brompton MLF35




Holborn MLF05




Pimlico MLF34



Stanmore MLF37




Bayswater MLF24




Russell MLF38




Finsbury MLF30




Kensington MLF07



Goldhawk MLF31



Greenford MLF32



Monument MLF09




Farringdon MLF29



Tufnell MLF18



Highgate MLF33



Camden MLF26



Temple MLF16



Barbican MLF03




Tower MLF36



Archway MLF02



Morden MLF12




Lambeth MLF08




Upminster MLF20




Bank MLF23




Tooting MLF17



Leyton MLF13



Aldgate MLF01



Parsons MLF14



Kilburn MLF06



Euston MLF04



Hillingdon MLF41




Wembley MLF11




Northfields MLF40



Paddington MLF39



Stockwell MLF15



Edgware MLF28



Trend

cat. C

82% PVC - 14% cotton - 4% polyester
Flame retardant - 50.000 Martindale



3150



3153



3152



3151



4152



3171




4696



3156



3159



3158



3160



4166



3165



4156



4161



4168



3176



4165



3166



3175



3163



4699



3161



4163



4701



4164




3169




3170

Trend	Technical details	
	Composition	Content: 82% PVC Backing: 14% cotton - 4% polyester
	Weight	Gr./m² 870
	Abrasion test	Martindale - BS 5690: 50.000 rubs
	Lightfastness	DIN 75202: 6/7
	Fastness to rubbing	ISO DIN 54021: Wet 5 Dry 5
	Flame retardant	DIN 75200 B1AT MVSS 302 DIN EN 1021 Parte. 1+2 M2 BS 5852/CRIB5 5,3 CH CL. 1IM FAR 25853 IMO A. 652(16)
cat. C	Features	Waterproof, unchangeable, anallergic Resistance to UV rays, sweat, ripping, saliva, urine, salt and chlorinated water Free of CD, AZO, FCKW, PCB, FORMALDEIDE and other substances dangerous for health
	2018	

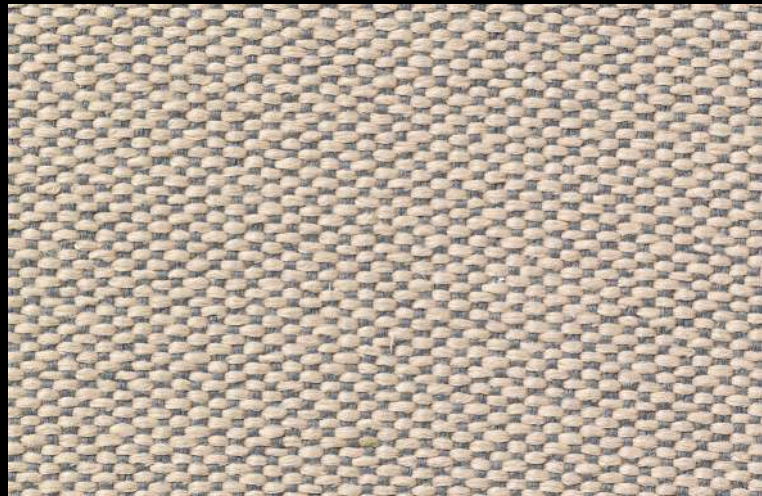

7048.01 P

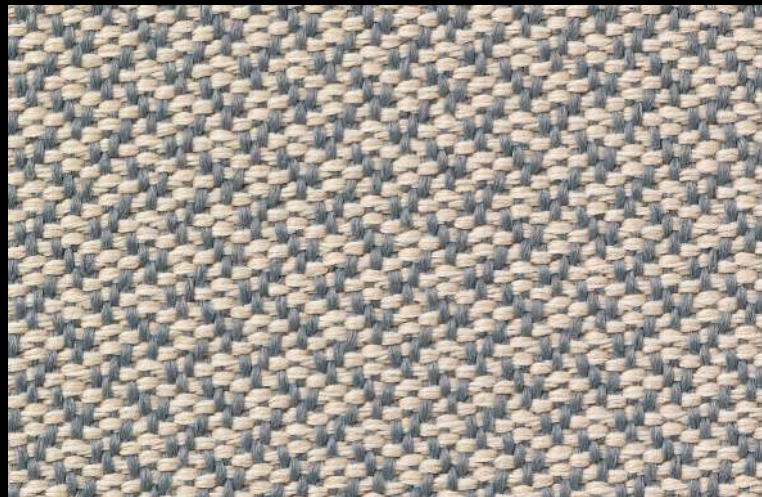

7048.01 M

Deans

cat. C


100% polyester FR
Flame retardant - 110.000 Martindale




7048.02 P



7048.02 M




7048.06 P




7048.06 M




7048.09 P




7048.09 M



7048.13 P




7048.13 M




7048.03 P




7048.03 M



7048.07 P




7048.07 M



7048.10 P




7048.10 M




7048.14 P



7048.14 M



7048.04 P



7048.04 M



7048.08 P



7048.08 M




7048.11 P




7048.11 M




7048.15 P




7048.15 M




7048.05 P



7048.05 M



7048.12 P



7048.12 M

Deans	Technical details	
	Composition	100% polyester FR
	Weight	Gr./ml. 861
	Abrasion test	Martindale - ISO 12947-2: 110.000 rubs
	Lightfastness	ISO 105-B02: 6/7
	Pilling	ISO 12945-2: 4 ASTM D3511: 3
	Fastness to rubbing	ISO 105-X12: Wet 4-5 Dry 4-5 AATC 8: Wet 5 Dry 5
	Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1 Cal TB 117-2013
	Features	Double faced upholstery, with a plain look on one side and a mélange pattern on the other side
	Environment	Oeko-Tex 100 certified
cat. C	2018	




Remix 2

cat. Super

90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale




113




123



133




143



152



163



173




183




223



233



242



252



362



373



383



393



412



422



433



443



452



543



612



632



643




653



662



672



682



692



722



733



743




762




773



783



823



842



852



873



912



923



933



942



954



962



973



982

Remix 2

cat. Super

2018

Technical details

Composition

90% new wool worsted - 10% nylon

Weight

Gr./ml. 415

Abrasion test

Martindale - ISO 12947-2: 100.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Flame retardant

AS/NZS 1530.3
AS/NZS 3837, class 2
BS 5852 Crib 5 with treatment
BS 5852 part 1
EN 1021-1/2
IMO FTP Code 2010 Part 8
NF D 60 013
NFPA 260
UNI 9175 1IM
US Cal. Bull. 117-2013
ÖNORM B1/ Q1

Environment

Complies with EU ecolabel "The Flower"




Capture

cat. Super


85% wools of New Zealand - 15% polyamide
Flame retardant - 200.000 Martindale



4102



4001



4201



4803



5401




5402



5103



5102



4601




5501




4101



4801




4401



4802




4301



4702



4701



4501



5201



4902



4901



5002



5001



5101



5301

Capture	Technical details	
	Composition	85% wools of New Zealand - 15% polyamide
	Weight	Gr./ml. 475
	Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
	Lightfastness	ISO 105 B02: 5/7
	Pilling	ISO 12945-2: 4/5
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
	Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
cat. Super	Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals
	2018	



Breeze Fusion

cat. Super

88% wools of New Zealand - 12% polyamide
Flame retardant - 100.000 Martindale



4003



4101



4103



4001



4004



4202




4104




4102




4002




4301




4303



4302



4401



4402



4503



4501



4502



4601



4602



4603



4604



4804



4803



4802



4201



4801

Breeze Fusion

cat. Super

Technical details

Composition	88% wools of New Zealand - 12% polyamide
Weight	Gr./ml. 590
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

2018



Molly

cat. Extra

100% new wool worsted
Flame retardant - 75.000 Martindale




110



122



164




192




112




114



116




152



154



160††



166




170



190




194



196

Molly	Technical details	
	Composition	100% new wool worsted
	Weight	Gr./ml. 690
	Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
	Lightfastness	ISO 105-B02: 4/7
	Pilling	ISO 12945-2: 3/4
	Flame retardant	EN 1021-1/2 DIN 4102 B2 ÖNORM B1/Q1 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013 NFPA 260 IMO FTP Code 2010: Part 8 BS 5852 part 1
cat. Extra	Environment	Complies with EU ecolabel "The Flower"
	2018	

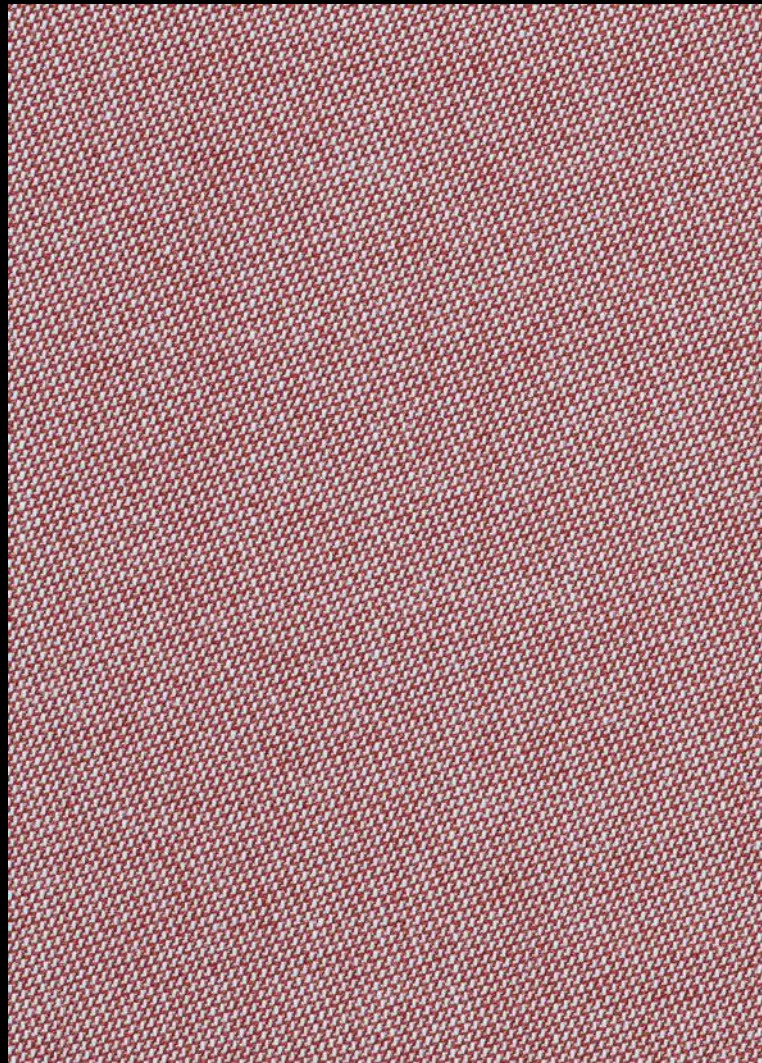

Rime

cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale



111




131




151




211



231



271




451



471




521




541




551



571



591




621




641



691



721



731



741



781



791



911




921



941



951



981



991


Rime

cat. Extra

Technical details

Composition	90% new wool worsted - 10% nylon
Weight	Gr./ml. 580
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/6
Pilling	ISO 12945-2: 4
Flame retardant	AS/NZS 3837, class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 ÖNORM B2/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"

2018

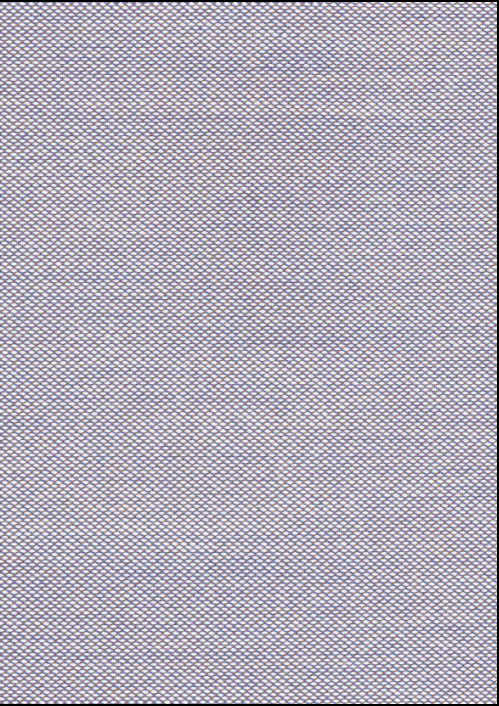


Steelcut Trio 3

cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale




105



113



124



133




153



176




195




205



213



246




253



266




276



283




336




376



383




416




426




446



453



466



476



515




526




533




553



576



616



636



645




666




686



713




716



746



756




776



796



806




883




906



946




953



966



976




983



996

		Steelcut Trio 3		Technical details	
		Composition		90% new wool worsted - 10% nylon	
		Weight		Gr./ml. 770	
		Abrasion test		Martindale - ISO 12947-2: 100.000 rubs	
		Lightfastness		ISO 105-B02: 5/7	
		Pilling		ISO 12945-2: 4	
		Flame retardant		AS/NZS 1530.3 AS/NZS 3837 class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010: Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013	
		Environment		Complies with EU ecolabel "The Flower" Greenguard and Greenguard Gold certified	
cat. Extra		2018			

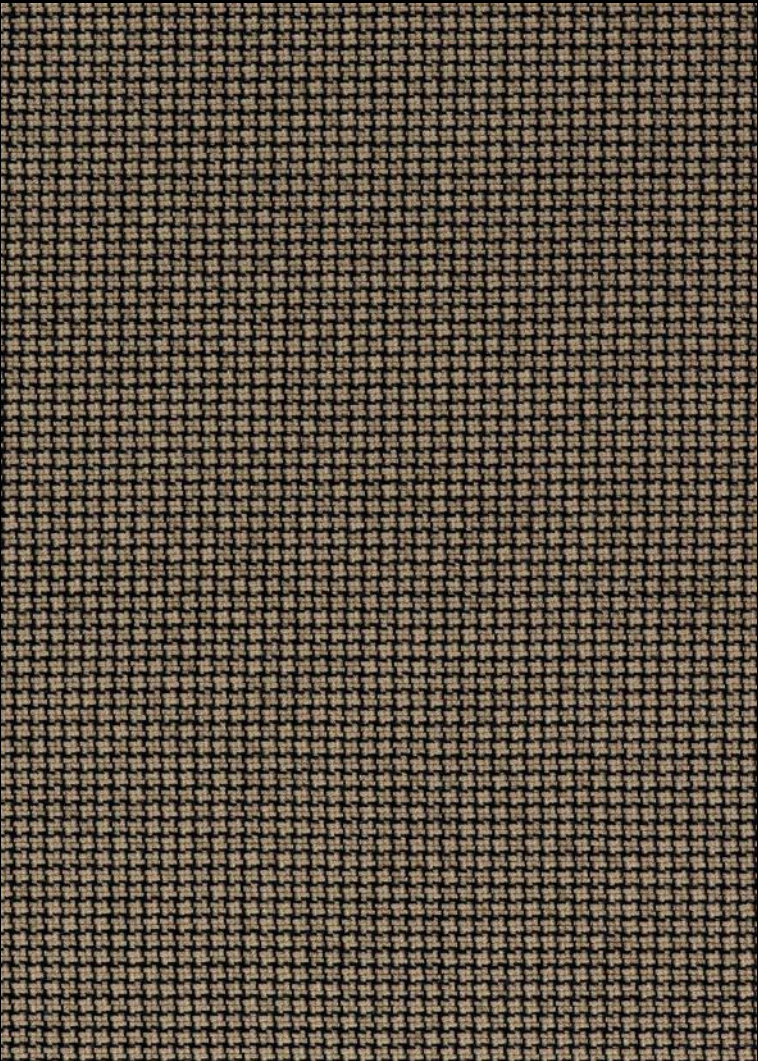

Colline
cat. Extra


75% new wool worsted - 17% acrylic - 8% nylon
Flame retardant - 100.000 Martindale



108




118



148



188



228



348



448



548



568



668



688



788


Colline

cat. Extra

Technical details

Composition	75% new wool worsted - 17% acrylic - 8% nylon
Weight	Gr./ml. 650
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Pilling	ISO 12945-2: 4/5
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Natural fibres / Sustainable resource

2018

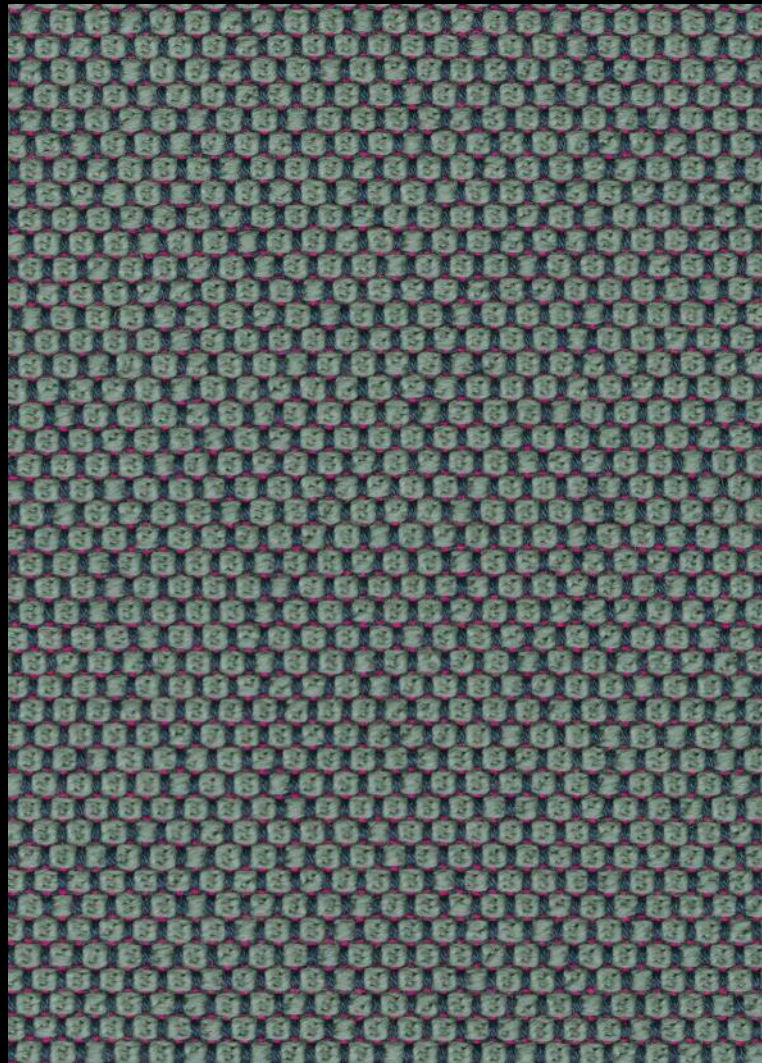


Opera

cat. Extra


96% virgin wool - 4% polyamide
Flame retardant - 90.000 Martindale



mirror



fango



taupe



flanell




macadamia



calla




kristall



pepper



ebony




kies



anthrazit



rosewood



sorbet



aureo



prime



maple




lake



brick



jade



bleu



delft



navy




delphi



indio



guave



clementine




aloe



smaragd

Opera	Technical details	
	Composition	96% virgin wool - 4% polyamide
	Weight	Gr./ml. 1010
	Abrasion test	Martindale - ISO 12947-2: 90.000 rubs
	Lightfastness	ISO 105-B02: 5/8
	Pilling	ISO 12945-2: 4/5
	Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
	Special finishes	Anti-shrink, anti-pilling, yarn dyed
cat. Extra	Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3
	2018	

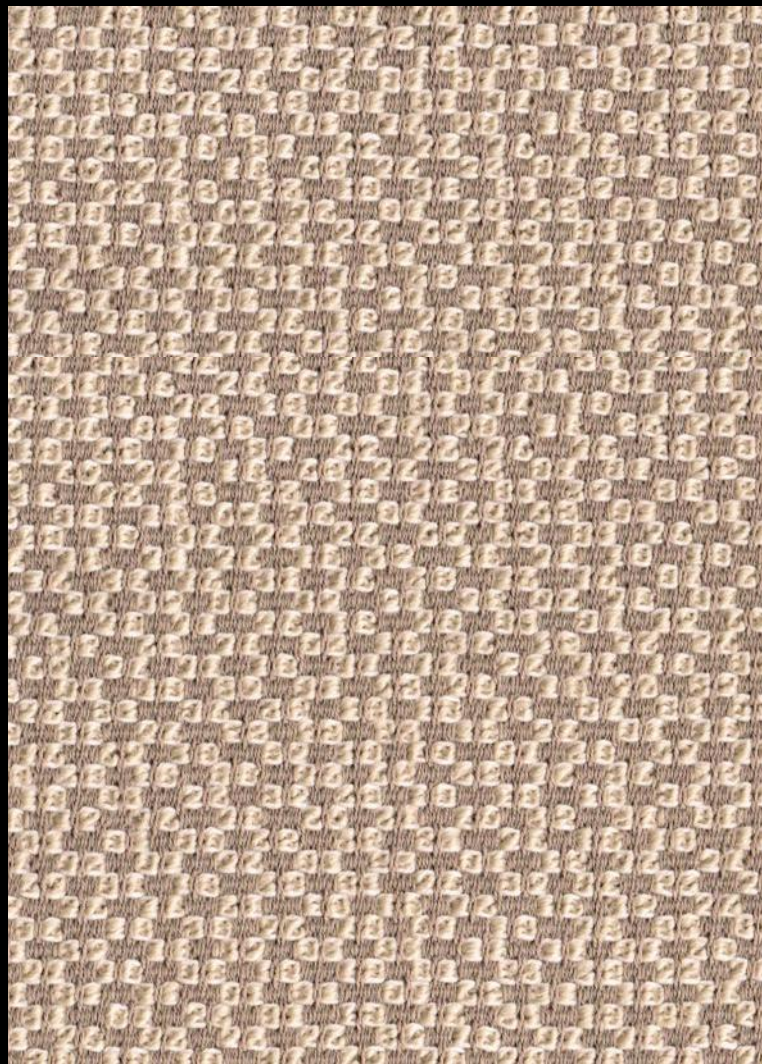

Dante

cat. Extra

95% virgin wool - 5% polyamide
Flame retardant - 52.000 Martindale



passion



litchi




lava



terra



curry



tivoli



tropic



jaspis



viola



pepper



graphit



lanoso



black



rosewood



coffee



prime



crisp




taupe



flanell



kies



chrom



almond



snow



angora

Dante

Technical details

Composition	95% virgin wool - 5% polyamide
Weight	Gr./ml. 920
Abrasion test	Martindale - ISO 12947-2: 52.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3

cat. Extra

2018



922



722



532



422




222



642




662

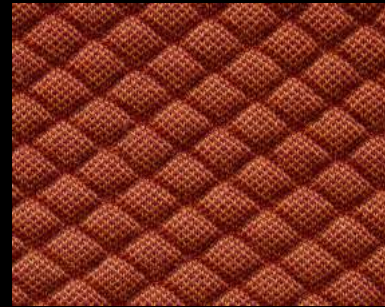

472




262

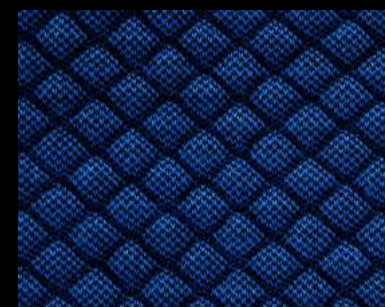

772



682

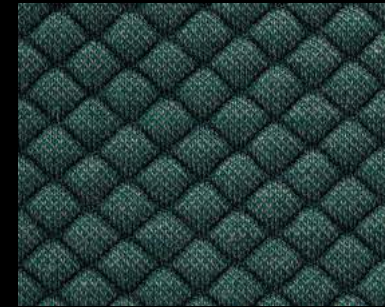

972



182



692



672

Mosaic 2

cat. Maxi

27% wool - 9% polyamide - 12% polyester -
6% elasthan - 46% polyester filling
Flame retardant - 100.000 Martindale


Mosaic 2

Technical details


Composition	27% wool - 9% polyamide - 12% polyester - 6 elasthan - 46% polyester filling
Weight	Gr./ml. 1080
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: 4/5
Flame retardant	EN 1021-1/2 BS 5852 part 1 DIN 4102-B2 US Cal. Tech. Bull. 117-2013 IMO FTP Code 2010 part 8
Features	No use of brominated flame retardants Stretch material
Environment	No use of AZO dyes, which may split off carcinogenic acryl amines No use of dyes containing more heavy metals than allowed No content of formaldehyde No use of brominated flame retardants Complies with REACH regulation

cat. Maxi


2019

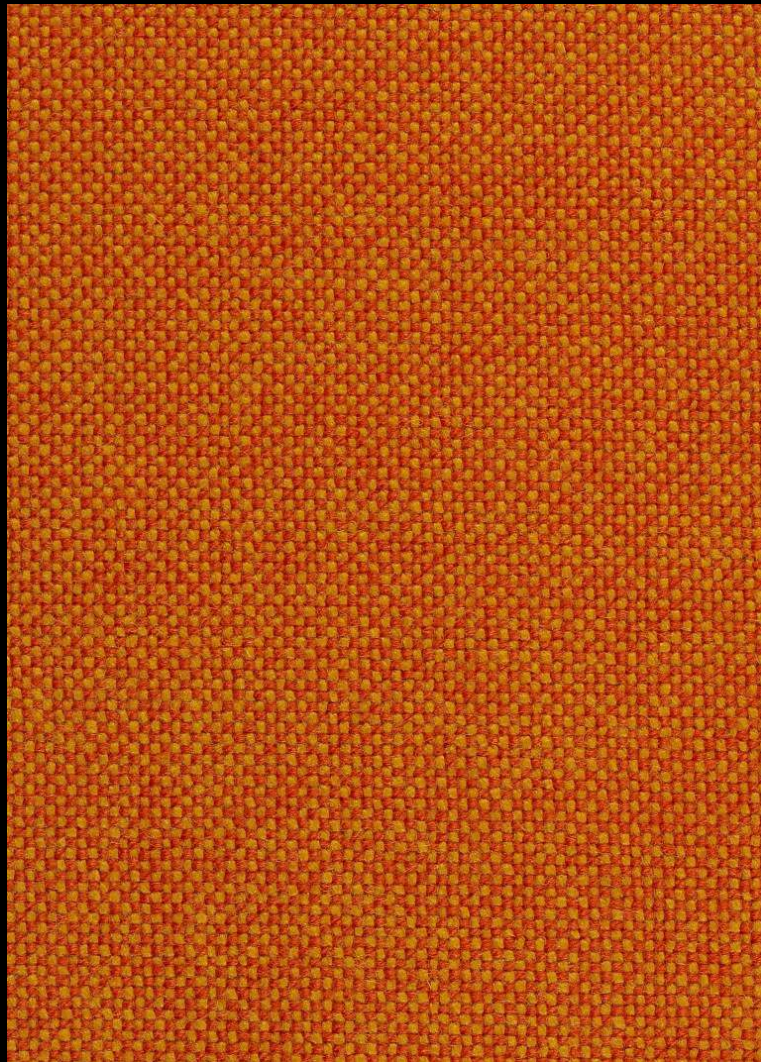

100




103




110




113




116



123



130



190



200



220



227



270



368



370



547




563



573



590



600



657



674



750



753



754



763



764



773




810

Hallingdal 65

cat. Maxi

70% new wool - 30% viscose
Flame retardant - 100.000 Martindale

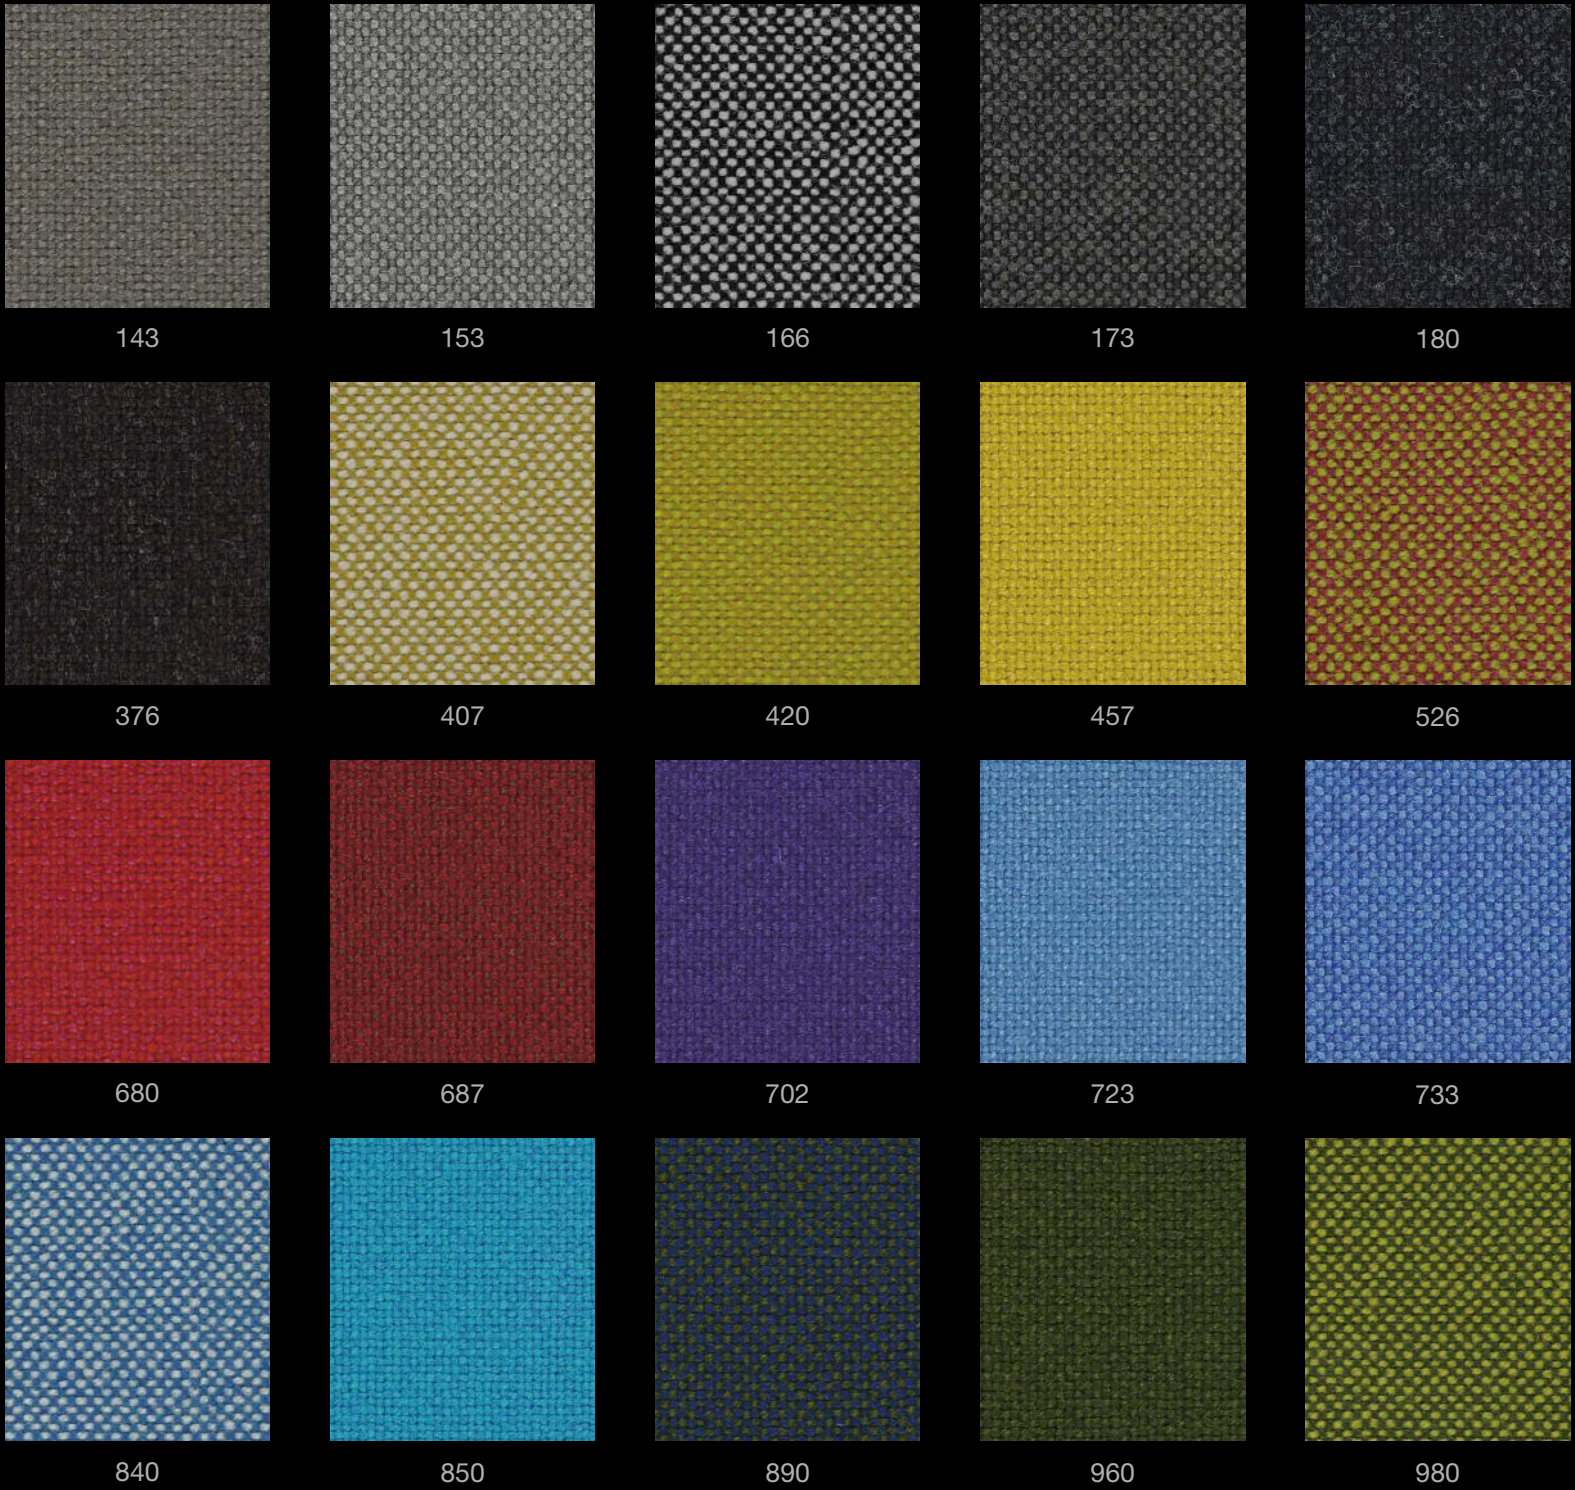

Hallingdal 65

cat. Maxi

Technical details

Composition	70% new wool - 30% viscose
Weight	Gr./ml. 795
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"



Comfort

cat. Maxi

88% polyester - 12% polyurethane
Flame retardant - 150.000 Martindale




63001



64002




64001



66002



1124



66008



5



10



62003




1566



4



61002



64003



1414



29



64009



65003



1043



40




35



67001



8422



8384



280




62004



68001



68003



68011



8397



9084




60005



60002



60003



1012



49



50

Comfort

cat. Maxi

Technical details

Composition	88% polyester - 12% polyurethane
Weight	Gr./ml. 385
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4-4/5 Dry 4-4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 cigarette ÖNORM B 3825-B2-3800-Q1 UK NF P 92-503 M3 Class Uno UNI 9175 Class 1 IM CA TB 117-2013
Environment	Oeko-Tex 100 certified 100% free of heavy metals Environmentally friendly – contains 37% recycled fibres
Features	Permanently antistatic – contains carbon fibres Dirt-resistant – water and oil repellent Easy to clean – stands intensive cleaning Permanently fire-resistant – contains fire-retardant fibres Stretchable – superior upholstering properties


2018



Divina 3

cat. Maxi

100% new wool
Flame retardant - 45.000 Martindale



106



154



171



356



384




393




652



666



676




756



782



791



173



181



191



224



246




346




444



462



536




542



623



636



686




691



692



696



712



742



826



846



876



922



936



956


Divina 3

cat. Maxi

Technical details

Composition	100% new wool
Weight	Gr./ml. 840
Abrasion test	Martindale - ISO 12947-2: 45.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 BS 5852 Crib 5 BS 5852 part 1 BS 5867 part 2 type B DIN 4102 B2 EN 1021-1/2 EN 13501, C-s1, d0, glued IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013 ÖNORM B1/ Q1
Environment	Natural fibres / Sustainable resource


2018

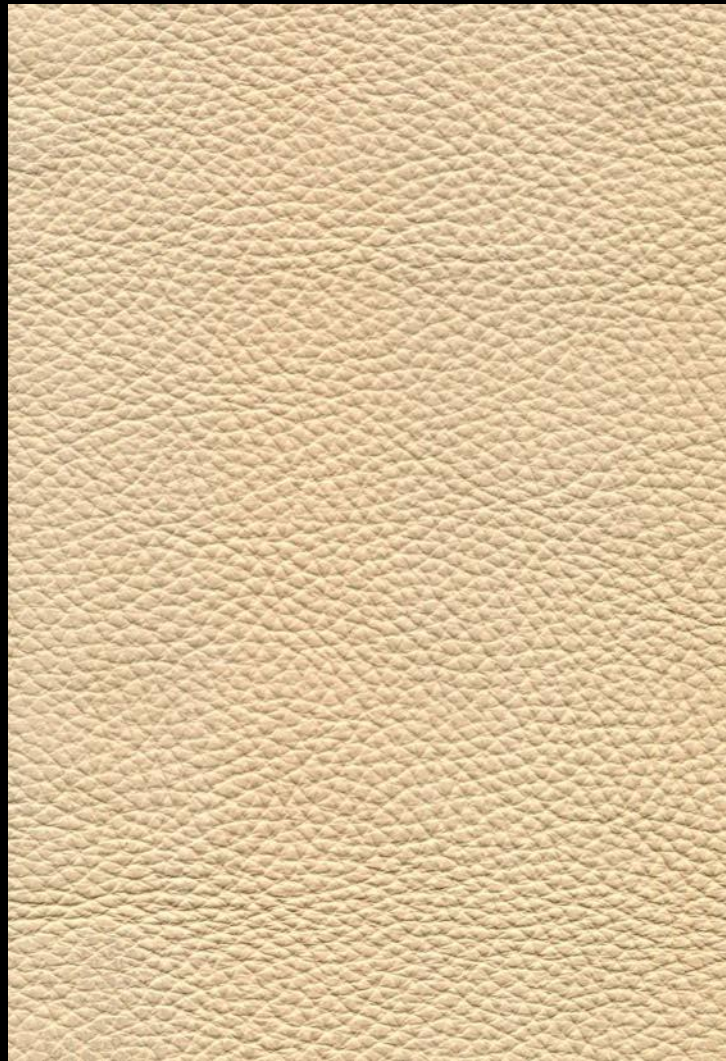


Lux 1

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm



400



60



455



471



439



438



453



454



408




421



404



448



437



62



478



423



402



472



424



444



441



426




425



452



456



63



427



403



446



428



451



429



449



412



431




413



Lux 2

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 0.9/1.1 mm



810



811



812



815



826



836



837



838



834



835



830



832



818



819



820



823



822




824



839




843



842



847



844



845



825




852



853



856



851



855



854



827



860



859



858



864

cat. Lux Lux 2	Technical details	
	Origin	Raw hides
	Place of origin	European
	Thickness	0.9 / 1.1 mm
	Lightfastness	ISO 105-B02: 7 blue scale
	Tear strenght	ISO 3377-1: 56 N/mm
	Fastness to rubbing	ISO 11640: Wet 150 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
	Flex crack resistance	5402: 20.000 cycles
	Adhesion of finish	ISO 11644: 5 N/cm
cat. Lux	Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette test N°1:Match test IMO FTP: Part 8-resolution A.652 (16) TB 117-A11: Cigarette test (California)
	2018	



Imperial 1

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm



720



724



727



731



721



722



723



735



725



726



728



729



730



732



733



734

cat. Imperial Imperial 1	Technical details	
	Origin	Raw hides
	Place of origin	European
	Thickness	1.3 / 1.5 mm
	Lightfastness	ISO 105-B02: 8 blue scale
	Tear strenght	ISO 3377-1: 121 N/mm
	Fastness to rubbing	ISO 11640: Wet 250 cycles value 4 grey scale Dry 500 cycles value 4/5 grey scale
	Flex crack resistance	5402: 50.000 cycles
	Adhesion of finish	ISO 11644: 13.4 N/cm
cat. Imperial 2018	Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)



Imperial 2

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.1 / 1.2 mm



500



501



502



520



522



524



540



541



542




N46



558



560



504



526



505



508



510



512



N47



N98



531



532



536



538



543



546



549



547



553



557



561



564



565



566




567



569


cat. Imperial Imperial 2	Technical details	
	Origin	Raw hides
	Place of origin	European
	Thickness	1.1 / 1.2 mm
	Lightfastness	ISO 105-B02: 4 blue scale
	Tear strenght	ISO 3377-1: 28 N/mm
	Fastness to rubbing	ISO 11640: Wet 80 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
	Flex crack resistance	5402: 25.000 cycles
	Adhesion of finish	ISO 11644: 7.5 N/cm
cat. Imperial Imperial 2	Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)
	2018	




lollipop




winegum




candybar



menthol



peppermint



popsicle




pastille




pistachio




candycane




popcorn




cottoncandy



tumtum



bonbon



machron




toffee




cookie



meringue



salt



bitter



licorice


Drop

cat. Special


60% wool - 20% polyamide - 20% polyester
Flame retardant - 80.000 Martindale

cat. Special Drop	Technical details	
	Composition	60% wool - 20% polyamide - 20% polyester
	Weight	Gr./m² 600
	Abrasion test	Martindale - ISO 12947-2: 80.000 rubs
	Lightfastness	ISO 105-B02: 6/7
	Pilling	ISO 12945-2: 4
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4
	Flame retardant	EN 1021-1/2 cigarette & match BS 5852 part 1 cigarette & match DIN 4102-B2 surface ignition US Cal. Tech. Bull. 117
	Features	Stretch material
cat. Special Drop	Environment	Oeko-Tex 100 certified Ecologically produced in Europe
	2018	


Metal/ finishes



ral 9005
black
nero

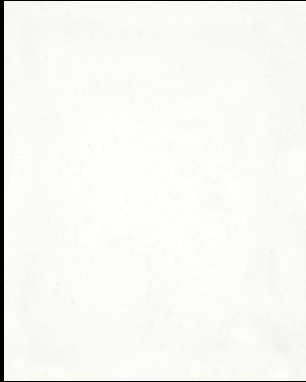

ral 9016
white
bianco



ral 3003
red
rosso



ral 5014
blue
blu



ivory
avorio



mud
fango



plum
prugna



chocolate
cioccolato




ral 7021
dark grey
grigio scuro



bronze
bronzo



brass
ottone

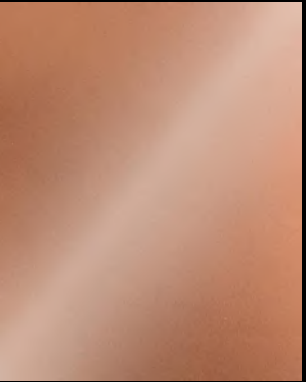

copper
rame



pitch black
nero pece



green tea
tè verde



azure cornflower
azzurro fiordaliso



MAHORA
— CONCEPT —

Mahora Concept
21 rue Gounod
92210 Saint-Cloud
01 87 124 124

www.mahora-concept.com