




NUANCIER

Retrouvez dans la table des matières, page suivante, votre produit ainsi que les matériaux et les coloris dans lesquels il est disponible.

**Attention : les coloris peuvent varier selon les réglages et la luminosité de votre écran.
Un doute ? Une question ? Contactez-nous au 01 87 124 124**



Xtreme

cat. A

100% recycled polyester FR
Flame retardant - 100.000 Martindale



Parasol YS073




Ocean YS100



Scuba YS082




Costa YS026




Navassa YS162



Martinique YS004



Bluefield YS021



Bluebell YS097



Cayman YS024



Leeward YS164




Curacao YS005




Orchilla YS167



Campeche YS074



Montserrat YS011




Appledore YS077



Apple YS096



Taboo YS045



Tonga YS160



Windjammer YS047




Bridgetown YS102



Mauve YS069



Tarot YS084



Anguilla YS169



Sombrero YS046



Krabi YS141



Twister YS083



Osumi YS171



Steel YS095




Blizzard YS081



Slip YS094




Padang YS145




Rum YS173




Manado YS166



Aruba YS108




Solano YS072



Lobster YS076



Jamaica YS027



Tortuga YS168



Panama YS079



Tokara YS136



Calypso YS106



Diablo YS101



Tobago YS030



Sandstorm YS071




Nougat YS091



Bounty YS086



Havana YS009



Arawak YS016

Xtreme

Composition

100% recycled polyester FR

Weight

Gr./m² 310

Abrasion test

Martindale - ISO 12947-2: 100.000 rubs

Lightfastness

ISO 105-B02: 6

Fastness to rubbing

ISO 105-X12: Wet 4
Dry 4

Flame retardant


EN 1021 - 1 (cigarette)
EN 1021 - 2 (match)
BS 7176 Low Hazard
BS 5852 Ignition Source 5
BS 7176 Medium Hazard
DIN 4102-B1
NF D 60-013
UNI 9175 Classe 1 IM
BS 476 Part 7 Class 1

Environment

Certified to the EU Ecolabel
 Certified to OEKO-TEX® Standard 100
 Made from 100% recycled polyester

cat. A

2018

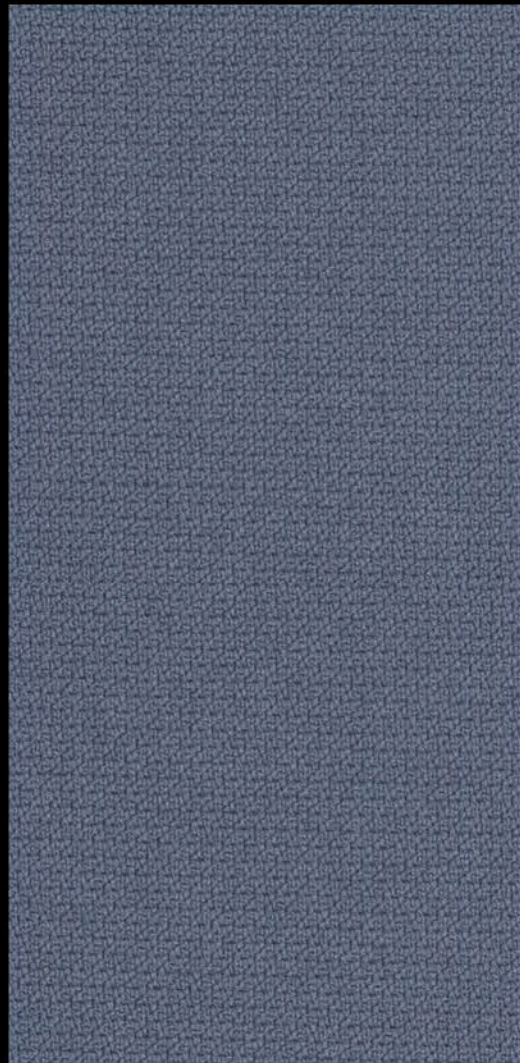


60004



66019



60999




60091



60011




60090



61149



62057




61103



61150



60021



63082



63012



63075



61102




64180




64179




64177



64013



65092



65023



65047



65093



65094




65090



65091



65018



66152



66148



66018




66151



65011




67004




67072



67073



67007



68158



68118




68159




68160



68161



68163



68162



68120



68121



62073



68164



68165

Step

cat. A

100% Trevira CS
Flame retardant - 100.000 Martindale


Step

Technical details

Composition	100% Trevira CS
Weight	Gr./ml. 470
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO DIN 4102 B1 NFP 92-503/504/505 M1 BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & match BS 5852 Crib 5 ÖNORM B 3825-B1-3800-Q1 UK FAR/JAR 25.853 (a) (i) (ii) BS 7176 Medium hazard AM 18 - NF D 60-013-(only for fabric) CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME DIN EN 13501-1 B-s1,d0
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

cat. A


2018

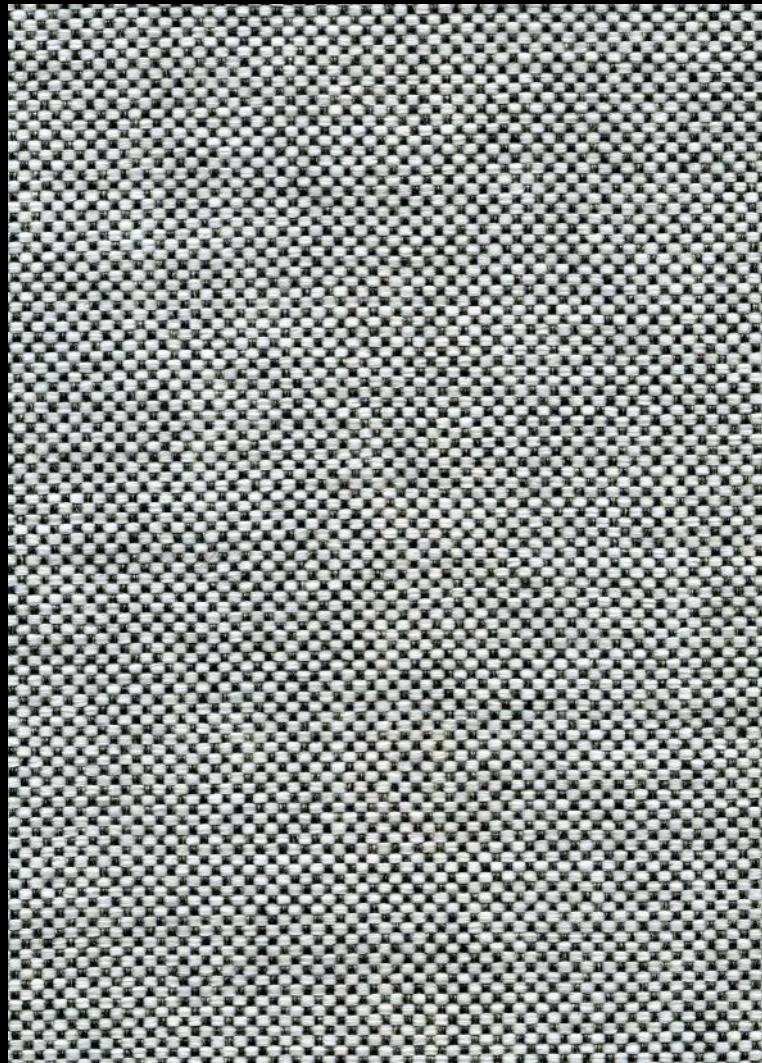


Angel

cat. A

100% PP FR (Nativa)
Flame retardant - 50.000 Martindale



601



600



201



203



408



200



102



401



400



402



503



403



404



406




405




700




706



705



307




310



500



304



302



311



800



803




802



702

Technical details

Composition	100% PP FR (Nativa)
Weight	Gr./m². 350
Abrasion test	Martindale - ISO 12947-2: 50.000 rubs
Lightfastness	ISO 105-B02: 4/5
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 5
Flame retardant	UNI 9175 Class 1IM NF D 60-013:2006 (AM18) BS 5852 IS Crib 5 EN 1021 Part.1-2 USA Calif. Bull. 117:2013 FTP Code 307(88):10 Annex 1 Part 8
Features	Antistatic No-shrink Stain resistance Hypoallergenic Antibacterial Water repellent

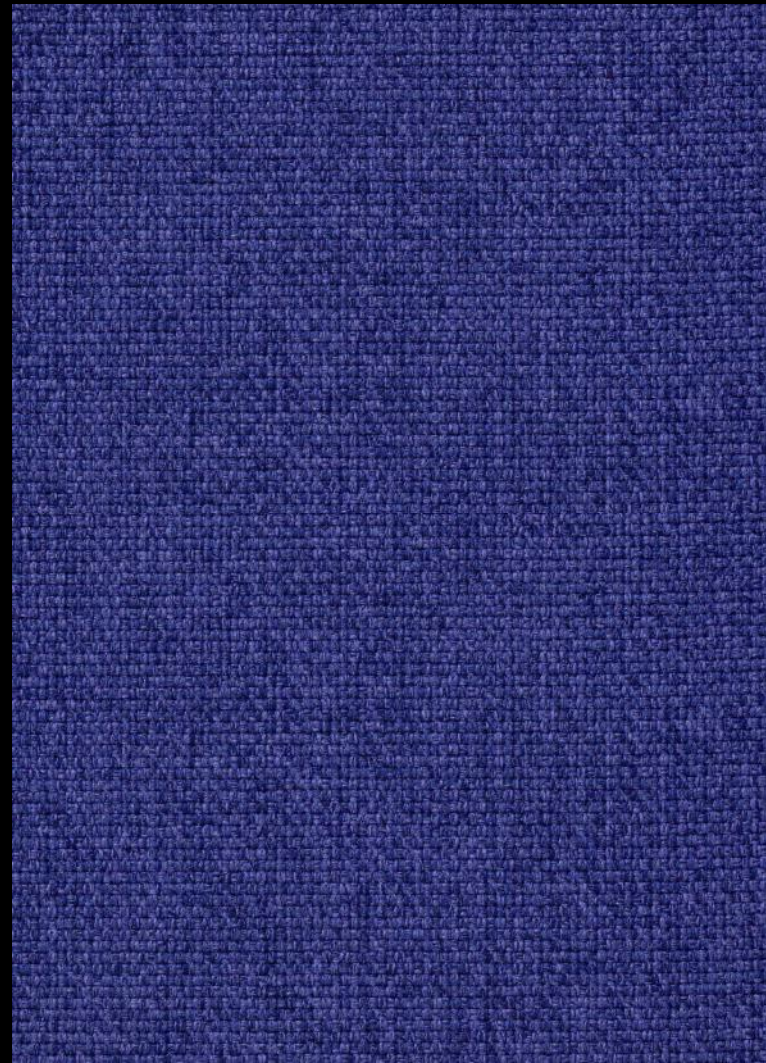

Medley

cat. A

100% polyester
Flame retardant - 75.000 Martindale



66008



60004



60999



60003



61002



61003



61004



61189




62054



62002



67002



63013




63017



63016



64019




64125



64123




65011




65012



66145




67052



66009



66010



67006



66007



68114



68002



68005

Technical details


Composition	100% polyester
Weight	Gr./ml. 510
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Part 1 0,1 Cigarette & match BS 476 Part 7, class 2 Class Uno UNI 9175 Class 1 I EMME Class Uno UNI 9174 - UNI 8457 ÖNORM B 3825-B2-3800-Q1 UK CA TB 117-2013 ASTM E 84
Environment	Oeko-Tex 100 certified 100% free of heavy metals




Mood

cat. A


72% PVC - 25% cotton - 3% polyurethane
Flame retardant - 50.000 Martindale




1




2



3




4



5



6



7



8



9




10



11



12



13



14



15



16



17



18




19



20



21




22




23



24



25



26



27



28

Technical details

Composition	72% PVC - 25% cotton - 3% polyurethane
Weight	Gr./m² 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Lightfastness	ISO 105-B02: 6
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO resolution A.652 (16): 1989 BS 5852 crib 5 BS 5852-1 part I EN 1021-2 UNI 9175 CLASSE 1 IM TB 117 sez. E – p.1 (California)
Treatment	VINYZONE: an anti-microbial and anti-mould agent certified by Bio-Pruf
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to UV rays Resistance to mould and bacteria Outdoor



1001



1002




1003




1004



1005

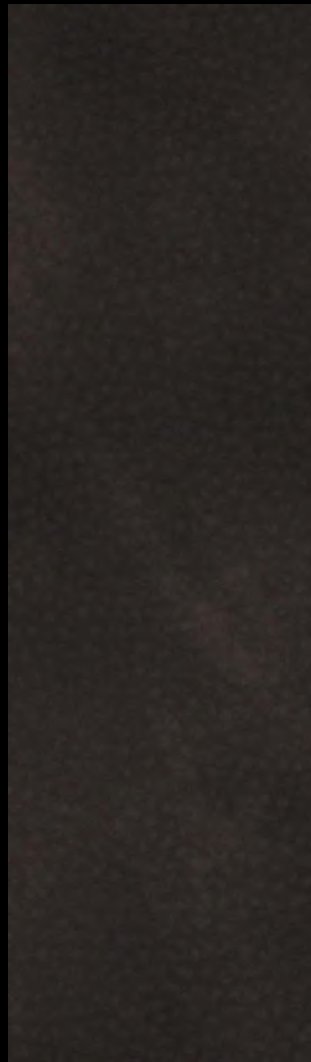

1006

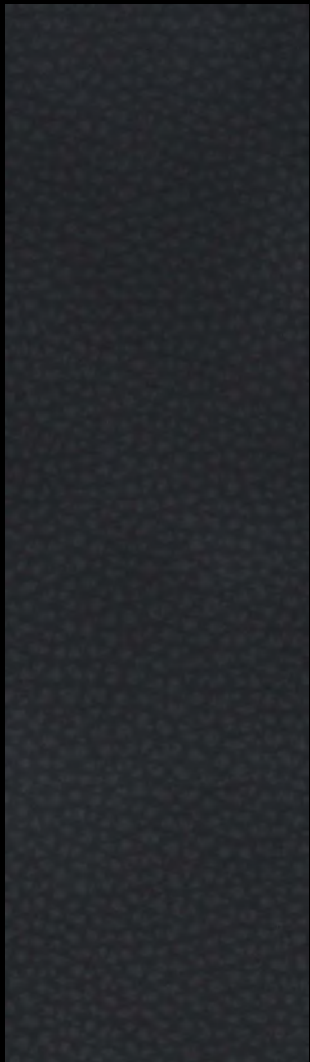

1007


Crazy

cat. A

80% PVC - 18% polyester - 2% polyurethane
Flame retardant - 50.000 Martindale

Technical details

Composition	80% PVC - 18% polyester - 2% polyurethane
Weight	Gr./m² 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	UNI 9175: classe 1IM EN 1021-2
Features	Comfort and elasticity Tear strength Easy to clean Waterproof Fire resistance

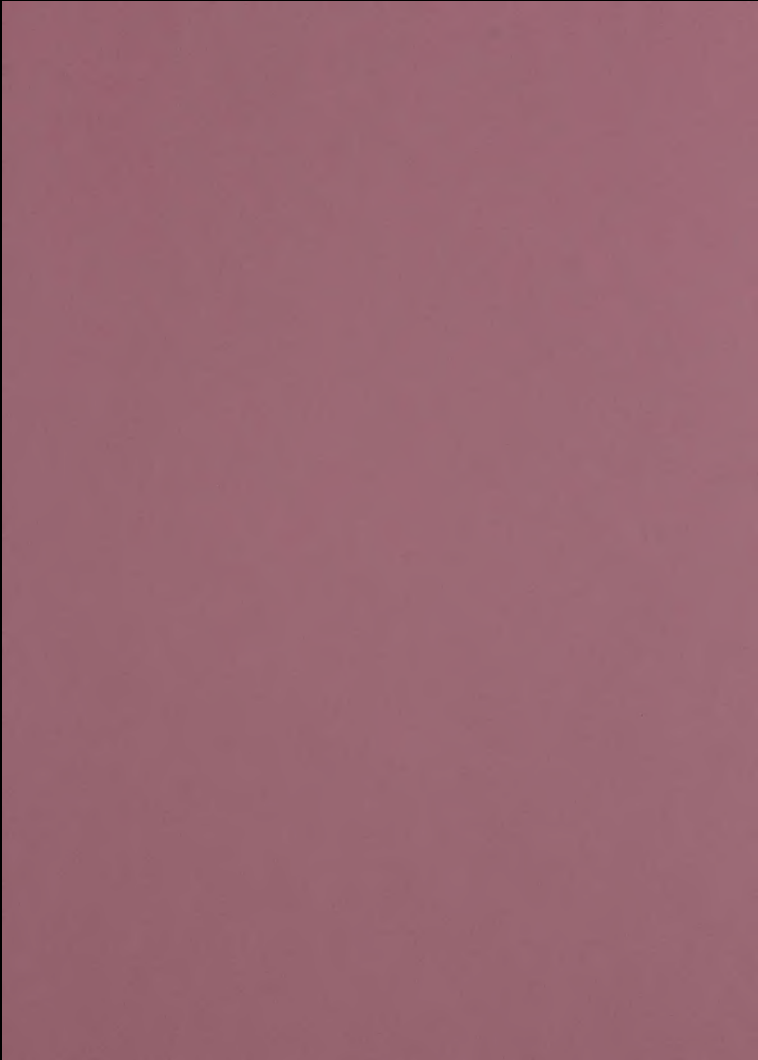


Ikon

cat. B

63% polyurethane - 29% cotton - 8% polyester
Flame retardant - 150.000 Martindale



130




230




330



430



530



630



730



830



930



1030



1130



1230



1330



1430



1530



1630



1730




1830




1930




2030



2130



2230



2330



2430

Technical details

Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m² 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105 B02: 5/6
Solidity to sweat	ISO 105 E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E - p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free



Extrema

cat. B

63% polyurethane - 29% cotton - 8% polyester
Flame retardant - 150.000 Martindale



450



3650



3750



150



250



350



1150



3250



750



1250



1350



2850



2750



4850



1050



950



850



4350



4050



3550



3150



550




650



2350



2950



2450




1650



3950



1550



1450



4650



3850



4550



4150



3350



4750



2550



1850



2650



1950



4250




1750



3050



3450



2050



4450



2150



2250


Extrema

Technical details

Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m² 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5/6
Solidity to sweat	ISO 105-E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E – p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free

cat. B

2018

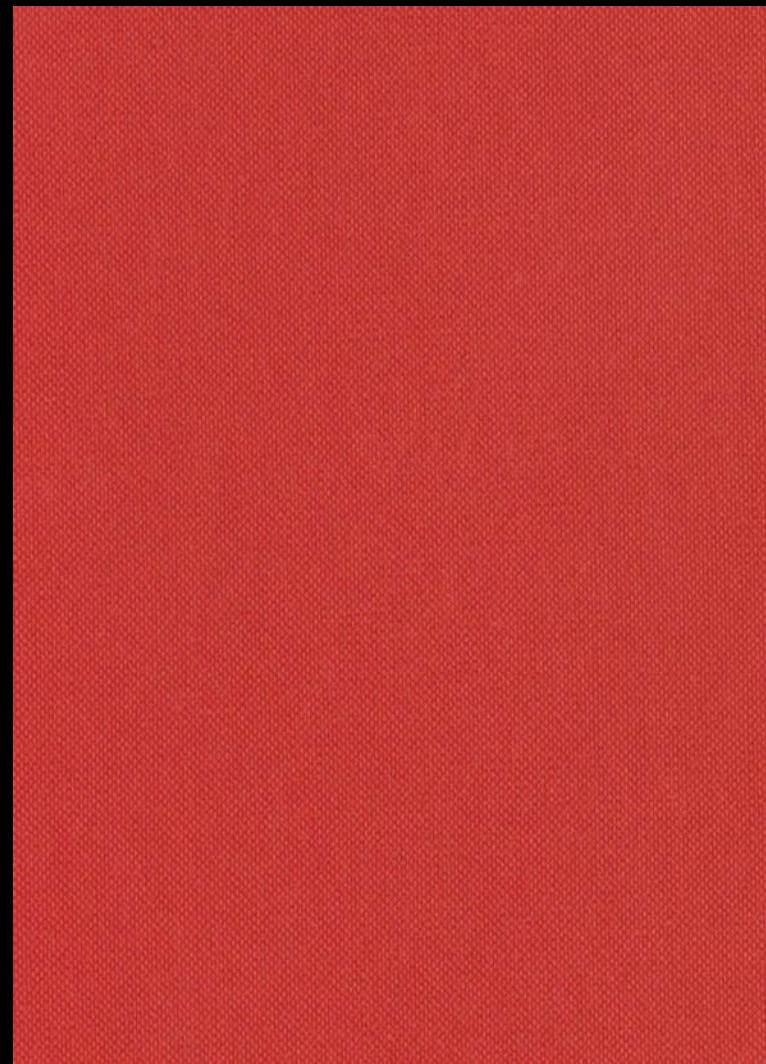

Silvertex

cat. B

Vinyl Urethane Topcoat and 100% Polyester Hi-Loft2
Flame retardant - 300.000 Martindale



4004 ice



1077 cream




1051 sisal




1010 beige



0009 taupe



6065 safran



6062 melon



2003 cobre



6061 mandarin



2011 red



2064 wine



0005 mocca



0073 luggage



5008 pistacho



5020 basil



5063 forest



2016 raspberry



4001 plata



12526 tempesta



9002 carbon



13138 black



3066 baltic



3067 delft



3007 sapphire




4024 meteor


Silvertex

Technical details

Composition	Content: 100% Vinyl Urethane Topcoat Backing: 100% Polyester Hi-Loft2
Weight	Gr./m² 685
Abrasion test	Martindale - ISO 12947:1999 Part 2: 300.000 rubs
Flame retardant	UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) EN 1021 Part 1 & 2 UNE 23.727-90 1R/M.2 NF P 92-503/M2 DIN 4102 B2 ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 FMVSS 302 FAR 25/853 (MED) Marine Equipment Directive (in its current valid version) ECE R118 (replaces Directive 95/28/CE) EN 71-2:2006+A1:2007 - Safety of toys - Part 2: Flammability
Finishes and treatments	PERMABLOK3® SILVERGUARD® Anti-stain Finish Cold Crack -23°C Mildew resistant backing and face UV-Resistance XENOTEST DIN 54004/ NTC 1479 EN 71-3 Safety of Toys (Migration of certain elements) Sulfide Stain Resistant Anti-static Finish

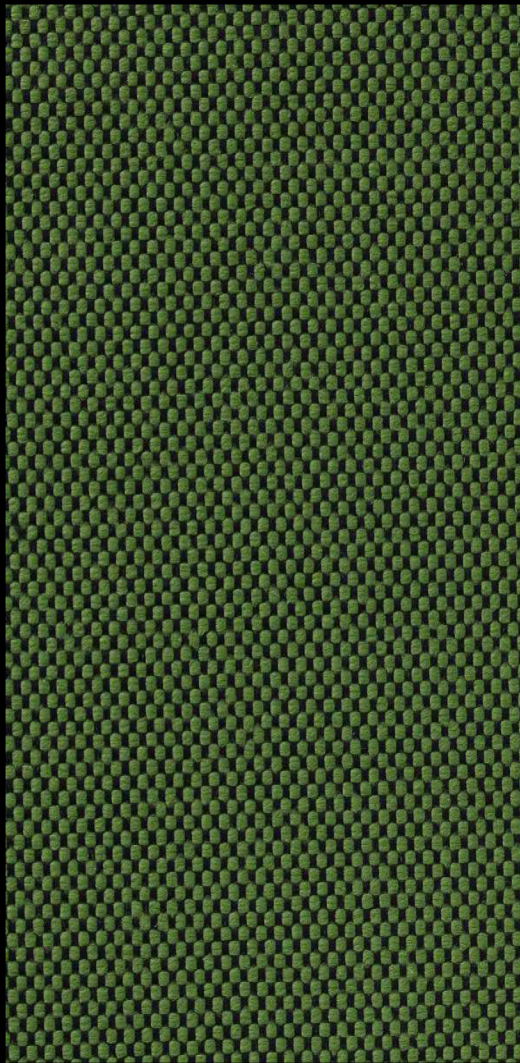


7052.01




7052.02




7052.04



7052.05




7052.07




7052.08




7052.09



7052.10



7052.11



7052.12




7052.13




7052.14




7052.16



7052.17




7052.19



7052.21



7052.22




7052.23




7052.24




7052.25



7052.26




7052.27




7052.29




7052.30



7052.33




7052.34




7052.36




7052.38



7052.39




7052.40



7052.41




7052.42




7052.43



7052.44




7052.45




7052.46



7052.47



7052.49



7052.50




7052.51

Samar

cat. B

100% polyester FR
Flame retardant - 50.000 Martindale

Samar		Technical details	
	Composition	100% polyester FR	
	Weight	Gr./ml. 660	
	Abrasion test	Martindale - ISO 12947-2: 50.000 rubs	
	Lightfastness	ISO 105-B02: 6	
	Pilling	ISO 12945-2: 4/5	
	Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5	
	Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1	
	Environment	Oeko-Tex 100 certified	
cat. B		2018	

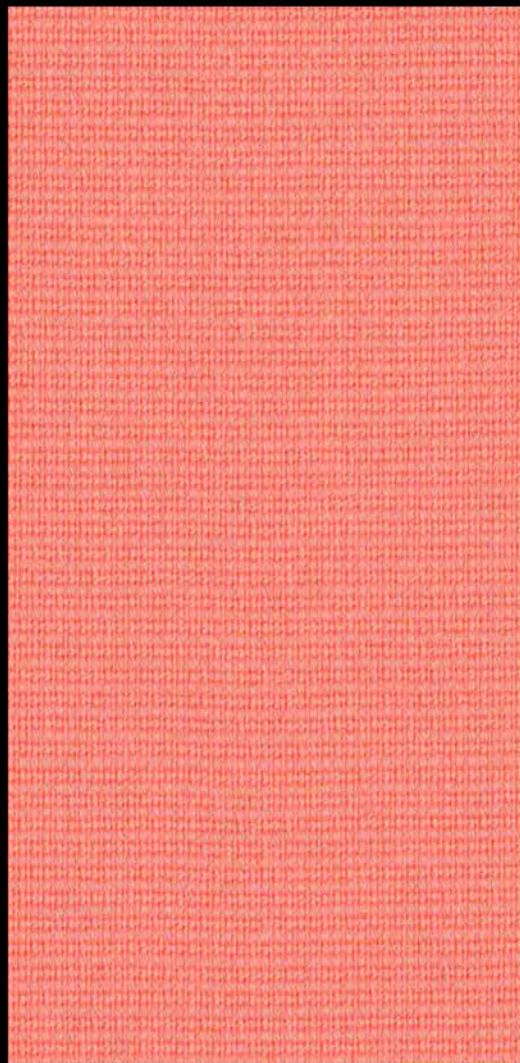


Fame

cat. B


95% wools of New Zealand - 5% polyamide
Flame retardant - 200.000 Martindale



60005



60078



61136



61135



60017



61060



60019



60051




61003



61047




61044



64167



64169



64165



63016




64119



64089



64058



65082



64055




65084



66130



66131



66075




66032




67068




66133



67016



67004



68147



68145



68035




67069




67067



68143



67005




62067



62068



68004



68148

Fame

Composition

95% wools of New Zealand - 5% polyamide

Weight

Gr./ml. 630

Abrasion test

Martindale - ISO 12947-2: 200.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Fastness to rubbing

ISO 105-X12: Wet 4/5
Dry 4/5

Flame retardant


BS EN 1021 1&2 Cigarette and Match
BS 5852 Crib 5
CA TB 117-2013
Class Uno UNI 9175 Class 1 I EMME
AM 18 - NF D 60-013
BS 5852 Part 1 0,1 Cigarette & Match
ÖNORM B 3825-B1-3800-Q1 UK
IMO MSC 307(88) Annex 1 part 8
MED Certificate IMO
BS 476 Part 7, class 1
DIN 4102 B1 (flame retardant)
NF P 92-503 M2 (flame retardant)
BS 7176 Medium hazard (flame retardant)

Environment

Oeko-Tex 100 certified
EU Ecolabel
100% free of heavy metals

cat. B

2018

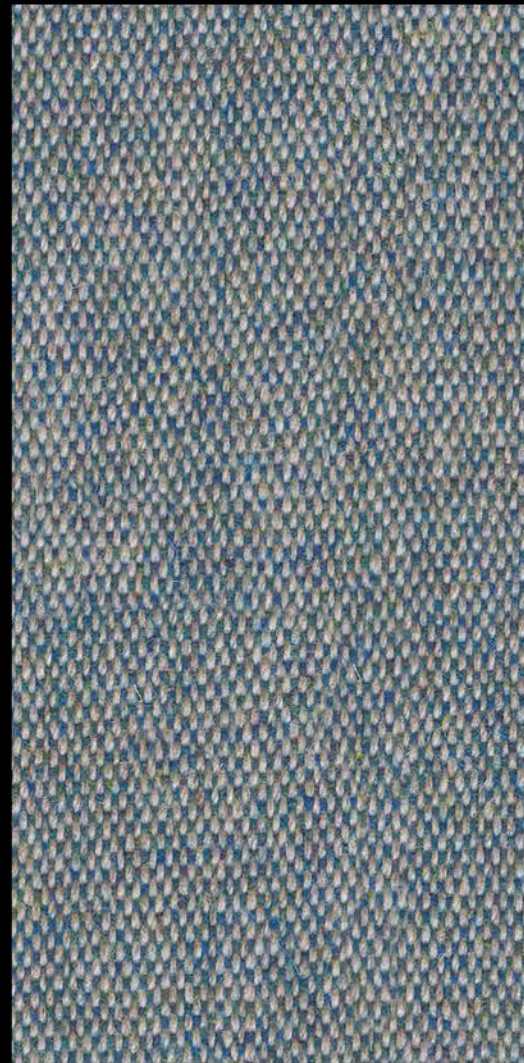

Main Line Flax

cat. B


70% virgin wool - 30% flax
Flame retardant - 50.000 Martindale



Waterloo MLF21



Bethnal MLF25



Newbury MLF10




Westminster MLF22




Charing MLF27




Brompton MLF35




Holborn MLF05




Pimlico MLF34



Stanmore MLF37




Bayswater MLF24




Russell MLF38




Finsbury MLF30




Kensington MLF07



Goldhawk MLF31



Greenford MLF32




Monument MLF09



Farringdon MLF29



Tufnell MLF18



Highgate MLF33



Camden MLF26



Temple MLF16



Barbican MLF03



Tower MLF36



Archway MLF02



Morden MLF12




Lambeth MLF08




Upminster MLF20




Bank MLF23




Tooting MLF17



Leyton MLF13



Aldgate MLF01



Parsons MLF14




Kilburn MLF06



Euston MLF04



Hillingdon MLF41




Wembley MLF11



Northfields MLF40



Paddington MLF39



Stockwell MLF15



Edgware MLF28



Trend

cat. C

82% PVC - 14% cotton - 4% polyester
Flame retardant - 50.000 Martindale



3150



3153



3152



3151



4152



3171




4696



3156



3159



3158



3160



4166



3165



4156



4161



4168



3176



4165



3166



3175



3163



4699



3161



4163



4701



4164



3169



3170

Technical details

Composition

Content: 82% PVC
Backing: 14% cotton - 4% polyester

Weight

Gr./m² 870

Abrasion test

Martindale - BS 5690: 50.000 rubs

Lightfastness

DIN 75202: 6/7

Fastness to rubbing

ISO DIN 54021: Wet 5
Dry 5

Flame retardant

DIN 75200
B1AT
MVSS 302
DIN EN 1021 Parte. 1+2
M2
BS 5852/CRIB5
5,3 CH
CL. 1IM
FAR 25853
IMO A. 652(16)

Features

Waterproof, unchangeable, anallergic
Resistance to UV rays, sweat, ripping, saliva, urine, salt and chlorinated water
Free of CD, AZO, FCKW, PCB, FORMALDEIDE and
other substances dangerous for health



Superb

cat. C

100% polyester FR
Flame retardant - 60.000 Martindale



101



103



104



109



143



142



141



131



132



134



135



136



137



138



111



112



113



114



116



117



118



124



128



127



126



125




129



130

145

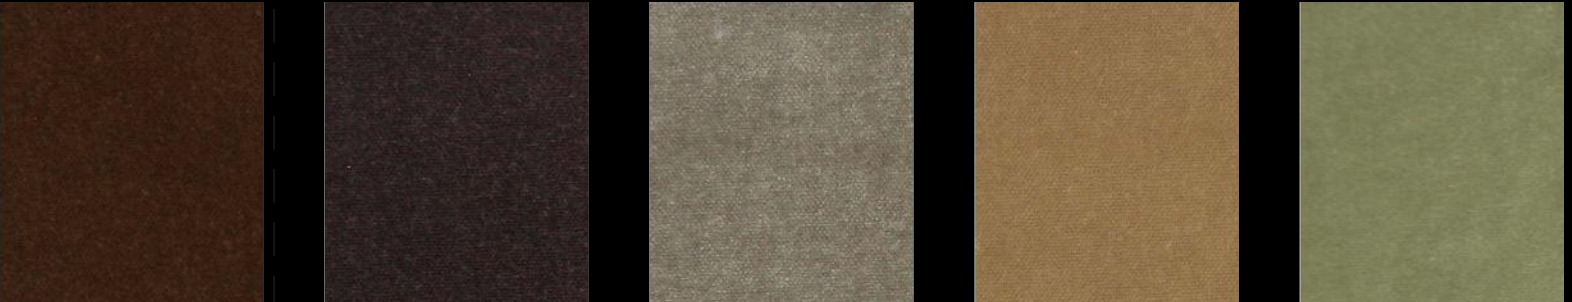

Superb


145

146

149

144

140



139



105




106



108



110




119



120



121




122



123



153



152



151



150




147


cat. C

Technical details

Composition	100% polyester FR
Weight	Gr./m ² 400
Abrasion test	Martindale - ISO 12947-2: 60.000 rubs
Lightfastness	ISO 105-B02: 5
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	EN 1021 1-2 UNI 9175 classe 1 IM UNI 9177 classe 1 BS 5852 crib 5 NF 92.503 M1 DIN 4102 B1
Features	Tear strenght Fire resistance Easy to clean

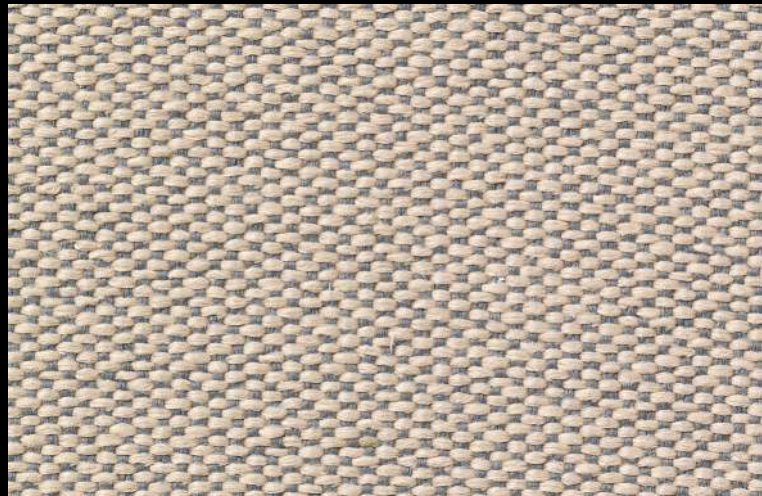

7048.01 P

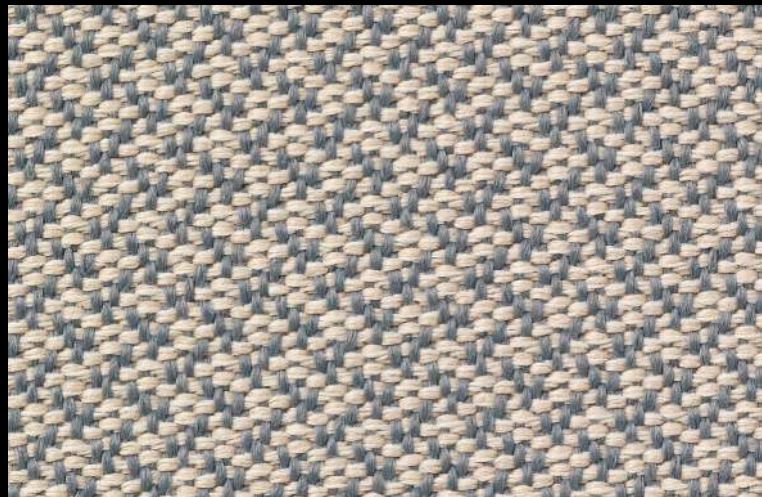

7048.01 M

Deans

cat. C


100% polyester FR
Flame retardant - 110.000 Martindale




7048.02 P



7048.02 M




7048.06 P




7048.06 M




7048.09 P




7048.09 M



7048.13 P




7048.13 M




7048.03 P




7048.03 M



7048.07 P




7048.07 M



7048.10 P




7048.10 M




7048.14 P



7048.14 M



7048.04 P



7048.04 M



7048.08 P



7048.08 M




7048.11 P




7048.11 M




7048.15 P




7048.15 M




7048.05 P



7048.05 M



7048.12 P



7048.12 M

Technical details

Composition	100% polyester FR
Weight	Gr./ml. 861
Abrasion test	Martindale - ISO 12947-2: 110.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4 ASTM D3511: 3
Fastness to rubbing	ISO 105-X12: Wet 4-5 Dry 4-5 AATC 8: Wet 5 Dry 5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1 Cal TB 117-2013
Features	Double faced upholstery, with a plain look on one side and a mélange pattern on the other side
Environment	Oeko-Tex 100 certified




Remix 2

cat. Super

90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale




113




123



133




143



152



163




173




183




223




233



242



252



362



373



383



393



412



422




433



443



452



543



612



632



643



653



662



672



682



692



722



733



743




762



773



783



823



842



852



873



912



923



933



942



954



962



973



982

Remix 2

cat. Super

2018

Technical details

Composition

90% new wool worsted - 10% nylon

Weight

Gr./ml. 415

Abrasion test

Martindale - ISO 12947-2: 100.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Flame retardant

AS/NZS 1530.3
AS/NZS 3837, class 2
BS 5852 Crib 5 with treatment
BS 5852 part 1
EN 1021-1/2
IMO FTP Code 2010 Part 8
NF D 60 013
NFPA 260
UNI 9175 1IM
US Cal. Bull. 117-2013
ÖNORM B1/ Q1

Environment

Complies with EU ecolabel "The Flower"




Capture

cat. Super


85% wools of New Zealand - 15% polyamide
Flame retardant - 200.000 Martindale



4102



4001



4201



4803



5401




5402



5103



5102



4601




5501




4101



4801




4401



4802




4301



4702



4701



4501



5201



4902



4901



5002



5001



5101




5301

Technical details

Composition	85% wools of New Zealand - 15% polyamide
Weight	Gr./ml. 475
Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
Lightfastness	ISO 105 B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals



1101



1102



2101



2104



1104



1103



3101



2102



4101



5101



3102



5102



5104



3103



4102



5103



2103



6101



4103



3104

Moda

cat. Super

92% wools of New Zealand - 8% polyamide
Flame retardant - 95.000 Martindale

laCividdina cat. Super	Moda 2018	Technical details Composition 92% wools of New Zealand - 8% polyamide Weight Gr./ml. 555 Abrasion test Martindale - ISO 12947-2: 95.000 rubs Lightfastness ISO 105-B02: 5/7 Pilling ISO 12945-2: 4 Fastness to rubbing ISO 105-X12: Wet 4/5 Dry 4/5 Flame retardant BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match BS 476 Part 7, class 1 Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013 Environment Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals	
---	--	--	--



Breeze Fusion

cat. Super

88% wools of New Zealand - 12% polyamide
Flame retardant - 100.000 Martindale



4003



4101



4103



4001



4004



4202




4104




4102




4002




4301




4303



4302



4401



4402



4503



4501



4502



4601



4602



4603



4604



4804



4803



4802




4201



4801

Technical details

Composition	88% wools of New Zealand - 12% polyamide
Weight	Gr./ml. 590
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals

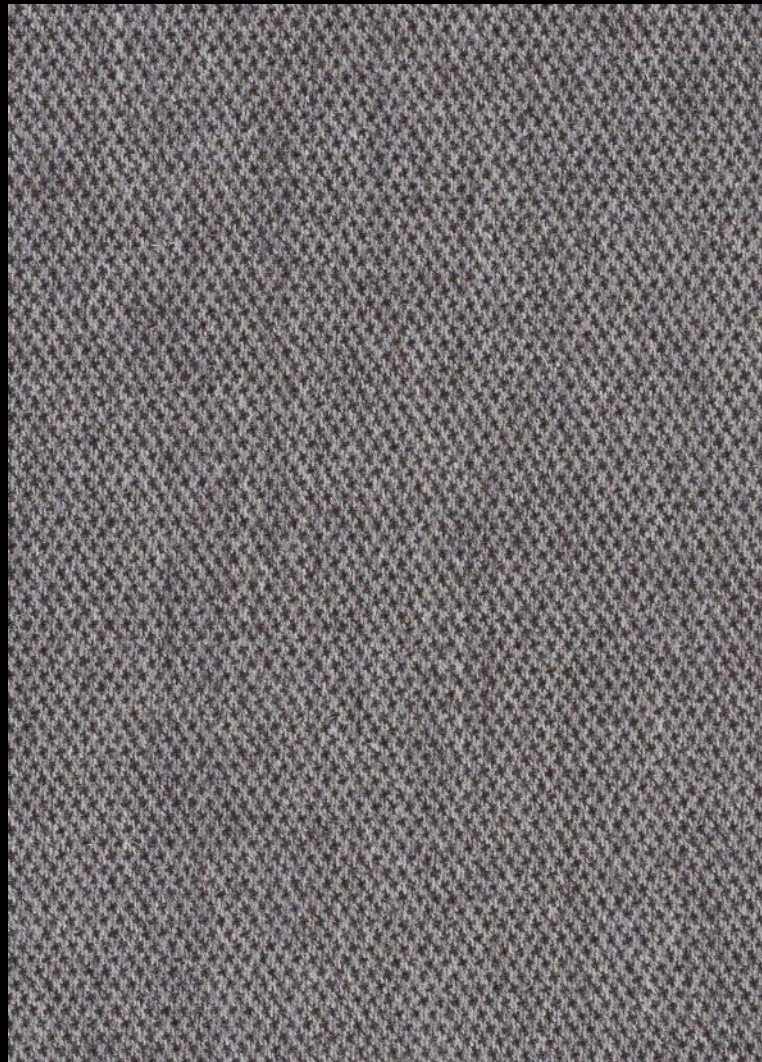

Molly

cat. Extra

100% new wool worsted
Flame retardant - 75.000 Martindale




110



122



164




192




112




114



116




152



154



160††



166




170



190




194



196

Technical details

Composition	100% new wool worsted
Weight	Gr./ml. 690
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 4/7
Pilling	ISO 12945-2: 3/4
Flame retardant	EN 1021-1/2 DIN 4102 B2 ÖNORM B1/Q1 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013 NFPA 260 IMO FTP Code 2010: Part 8 BS 5852 part 1
Environment	Complies with EU ecolabel "The Flower"

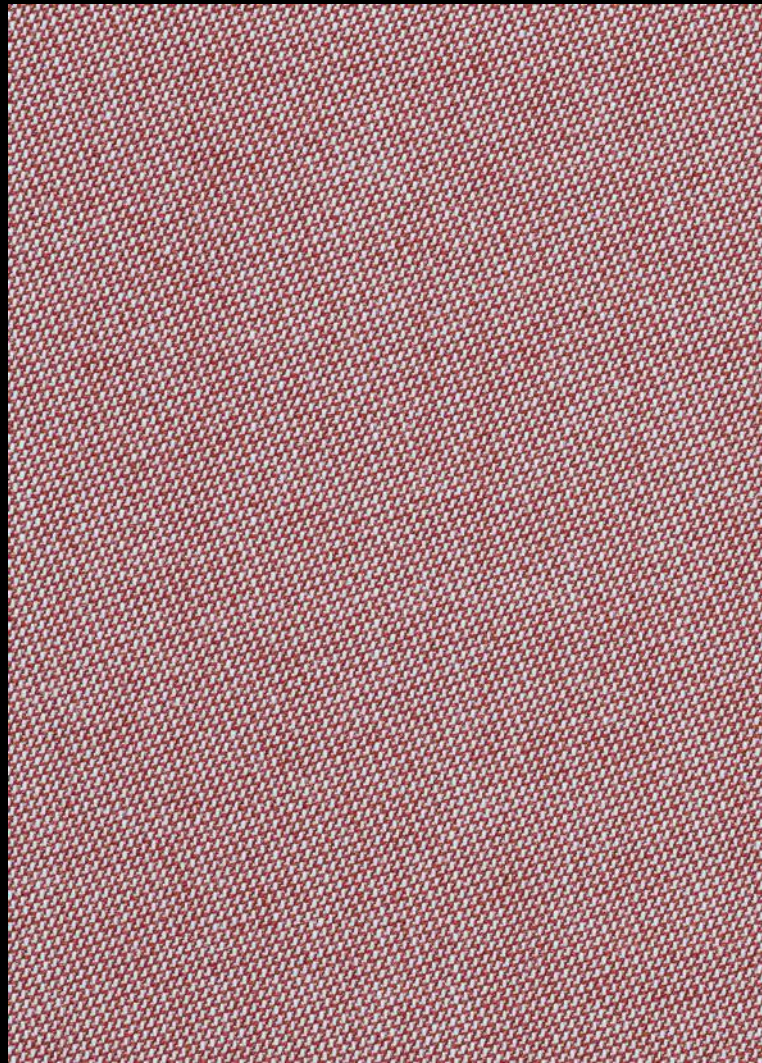

Rime

cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale



111




131




151




211



231



271




451



471




521




541




551



571



591




621




641



691



721



731



741



781



791



911




921



941



951




981



991

laCividina cat. Extra	Rime 2018	Technical details Composition 90% new wool worsted - 10% nylon Weight Gr./ml. 580 Abrasion test Martindale - ISO 12947-2: 100.000 rubs Lightfastness ISO 105-B02: 5/6 Pilling ISO 12945-2: 4 Flame retardant AS/NZS 3837, class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 ÖNORM B2/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013 Environment Complies with EU ecolabel "The Flower"	
--	--	---	--

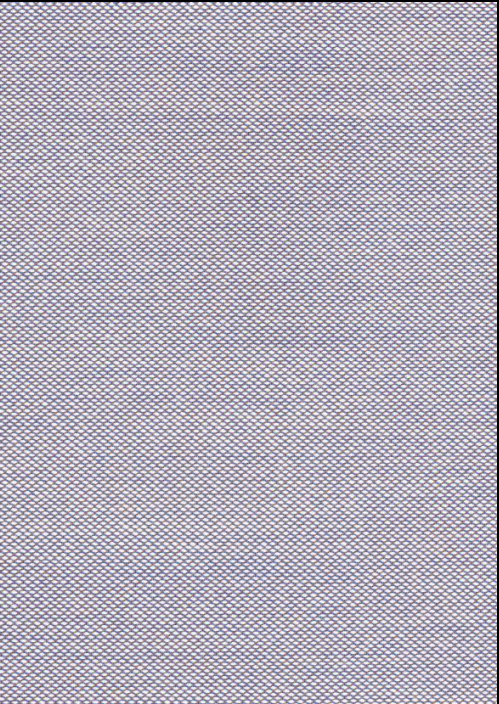


Steelcut Trio 3

cat. Extra


90% new wool worsted - 10% nylon
Flame retardant - 100.000 Martindale




105



113



124



133



153




176




195




205



213



246




253



266



276



283




336




376



383




416




426



446



453



466



476



515




526




533




553




576



616



636



645




666



686



713




716



746



756




776



796




806




883




906



946




953



966



976




983



996

Steelcut Trio 3	Composition	90% new wool worsted - 10% nylon
	Weight	Gr./ml. 770
	Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
	Lightfastness	ISO 105-B02: 5/7
	Pilling	ISO 12945-2: 4
	Flame retardant	AS/NZS 1530.3 AS/NZS 3837 class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010: Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
	Environment	Complies with EU ecolabel "The Flower" Greenguard and Greenguard Gold certified
cat. Extra		2018

Technical details	
90% new wool worsted - 10% nylon	
Gr./ml. 770	
Martindale - ISO 12947-2: 100.000 rubs	
ISO 105-B02: 5/7	
ISO 12945-2: 4	
AS/NZS 1530.3 AS/NZS 3837 class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010: Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013	
Complies with EU ecolabel "The Flower" Greenguard and Greenguard Gold certified	

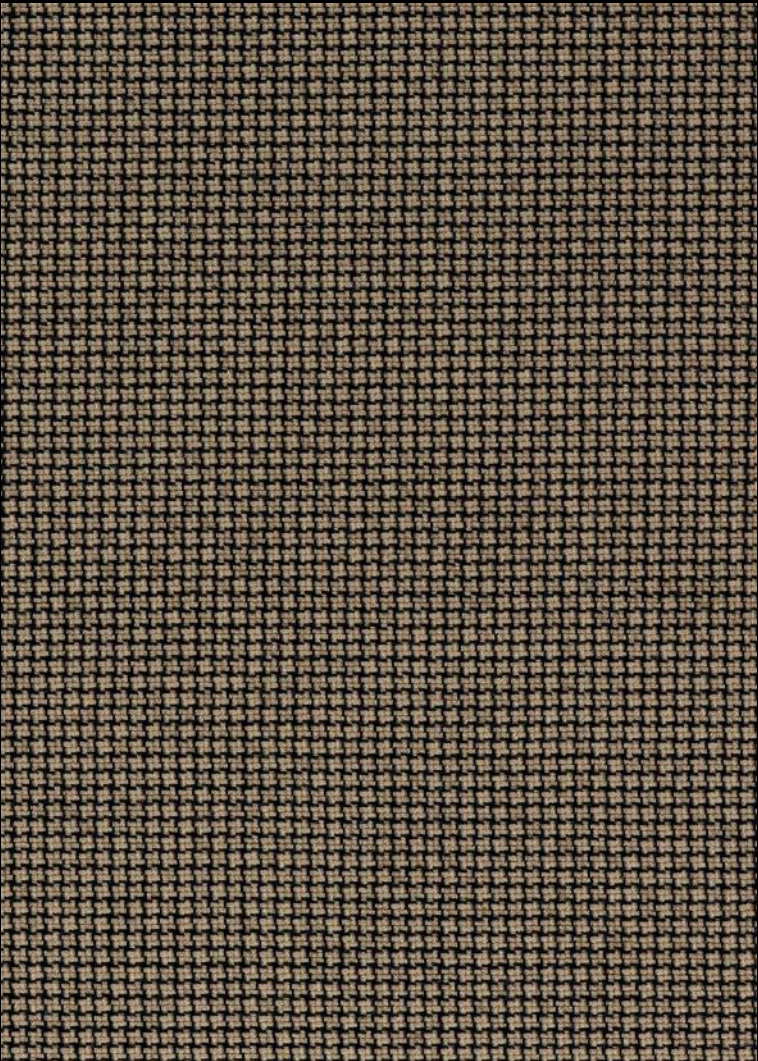

Colline

cat. Extra


75% new wool worsted - 17% acrylic - 8% nylon
Flame retardant - 100.000 Martindale



108




118



148



188



228



348



448



548



568



668




688



788

Technical details

Composition	75% new wool worsted - 17% acrylic - 8% nylon
Weight	Gr./ml. 650
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Pilling	ISO 12945-2: 4/5
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Natural fibres / Sustainable resource

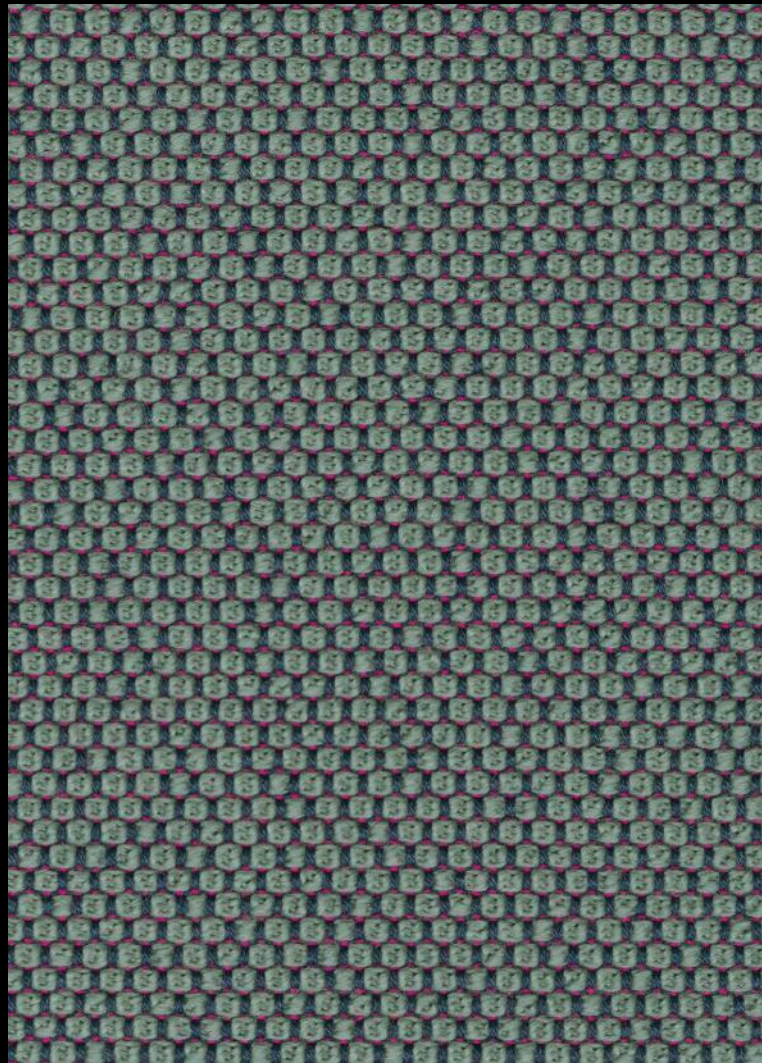


Opera

cat. Extra


96% virgin wool - 4% polyamide
Flame retardant - 90.000 Martindale



mirror



fango



taupe



flanell




macadamia



calla




kristall



pepper



ebony




kies



anthrazit



rosewood



sorbet



aureo



prime



maple




lake



brick



jade



bleu



delft



navy




delphi



indio



guave



clementine




aloe



smaragd

Technical details

Composition	96% virgin wool - 4% polyamide
Weight	Gr./ml. 1010
Abrasion test	Martindale - ISO 12947-2: 90.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3

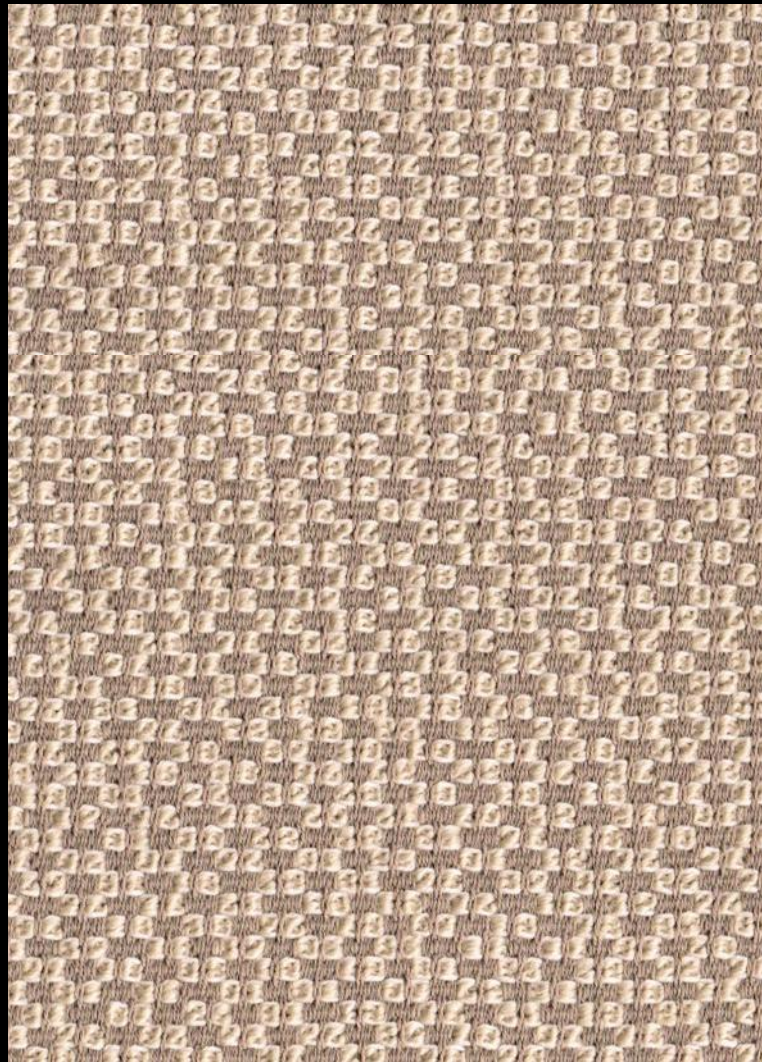

Dante

cat. Extra

95% virgin wool - 5% polyamide
Flame retardant - 52.000 Martindale



passion



litchi



lava



terra



curry



tivoli



tropic



jaspis



viola



pepper



graphit



lanoso



black



rosewood



coffee



prime



crisp



taupe



flanell



kies



chrom



almond



snow



angora

laCividina cat. Extra	Dante 2018	Technical details Composition 95% virgin wool - 5% polyamide Weight Gr./ml. 920 Abrasion test Martindale - ISO 12947-2: 52.000 rubs Lightfastness ISO 105-B02: 5/8 Pilling ISO 12945-2: 4/5 Flame retardant FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive Special finishes Anti-shrink, anti-pilling, yarn dyed Environment Natural, renewable material RAL-UZ 117 Attachment 2+3	
--	---	--	--



Arco

cat. Extra

95% virgin wool - 5% polyamide
Flame retardant - 70.000 Martindale



cloud



biber



coast



sepia



lanoso



black



ebony



muskat



fossil



taupe



flanell



calla



snow




jasmin



bast




limette



safran




coral



granat



heart



blackberry



henna




cassis



elegant



velvet



zinn




opal



monte

laCividina	cat. Extra	Arco	Technical details	
			Composition	95% virgin wool - 5% polyamide
			Weight	Gr./ml. 980
			Abrasion test	Martindale - ISO 12947-2: 70.000 rubs
			Lightfastness	ISO 105-B02: 5/8
			Pilling	ISO 12945-2: 4/5
			Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 IMO: 2014/90/EU Marine Equipment Directive NF D 60-013 (Art. AM 18)
			Special finishes	Anti-shrink, anti-pilling, yarn dyed
		Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3	
		2018		

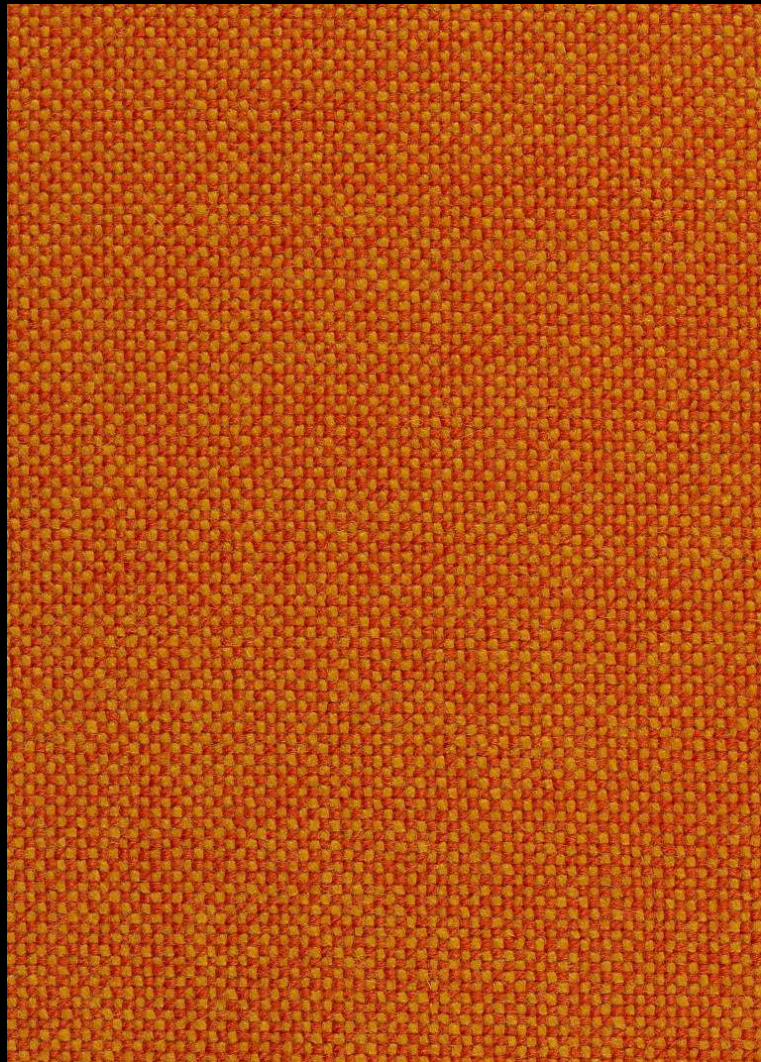


Hallingdal 65

cat. Maxi


70% new wool - 30% viscose
Flame retardant - 100.000 Martindale




100




103




110




113



116



123



130



190



200




220



227



270



368



370




547




563



573



590



600



657




674



750



753




754



763




764



773



810

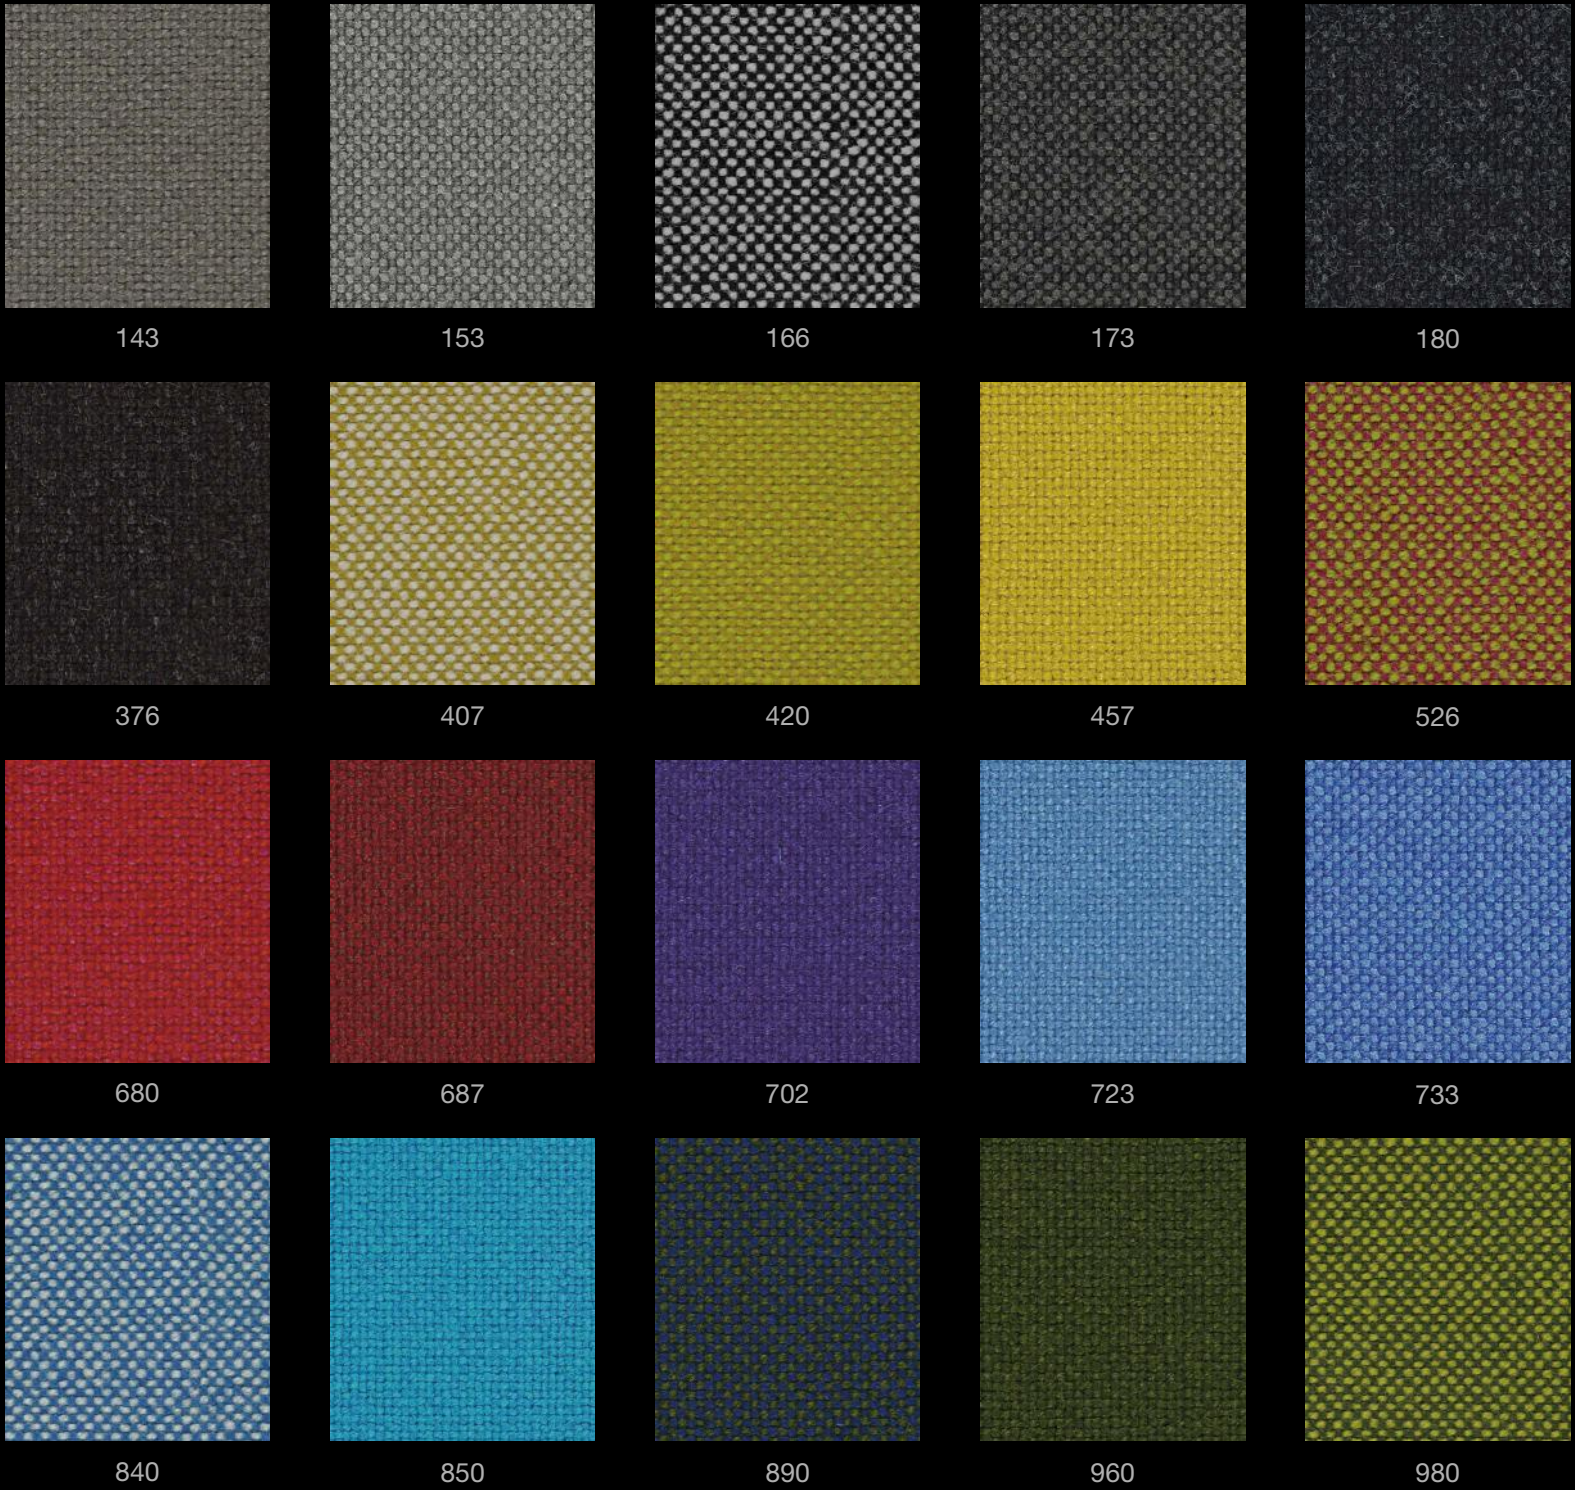

Hallingdal 65

Technical details

Composition	70% new wool - 30% viscose
Weight	Gr./ml. 795
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"

cat. Maxi

2018



Comfort

cat. Maxi

88% polyester - 12% polyurethane
Flame retardant - 150.000 Martindale




63001



64002




64001



66002



1124



66008



5



10



62003




1566



4



61002



64003



1414




29



64009



65003



1043



40




35



67001



8422



8384



280



62004




68001



68003



68011



8397



9084




60005



60002




60003



1012



49



50

Technical details


Composition	88% polyester - 12% polyurethane
Weight	Gr./ml. 385
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4-4/5 Dry 4-4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 cigarette ÖNORM B 3825-B2-3800-Q1 UK NF P 92-503 M3 Class Uno UNI 9175 Class 1 IM CA TB 117-2013
Environment	Oeko-Tex 100 certified 100% free of heavy metals Environmentally friendly – contains 37% recycled fibres
Features	Permanently antistatic – contains carbon fibres Dirt-resistant – water and oil repellent Easy to clean – stands intensive cleaning Permanently fire-resistant – contains fire-retardant fibres Stretchable – superior upholstering properties



Divina 3

cat. Maxi

100% new wool
Flame retardant - 45.000 Martindale



106



154



171



356



384



393




652




666



676




756



782



791



173



181



191



224



246




346




444



462



536




542



623



636



686



691



692



696



712



742



826



846




876



922




936



956

Technical details


Composition	100% new wool
Weight	Gr./ml. 840
Abrasion test	Martindale - ISO 12947-2: 45.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 BS 5852 Crib 5 BS 5852 part 1 BS 5867 part 2 type B DIN 4102 B2 EN 1021-1/2 EN 13501, C-s1, d0, glued IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013 ÖNORM B1/ Q1
Environment	Natural fibres / Sustainable resource

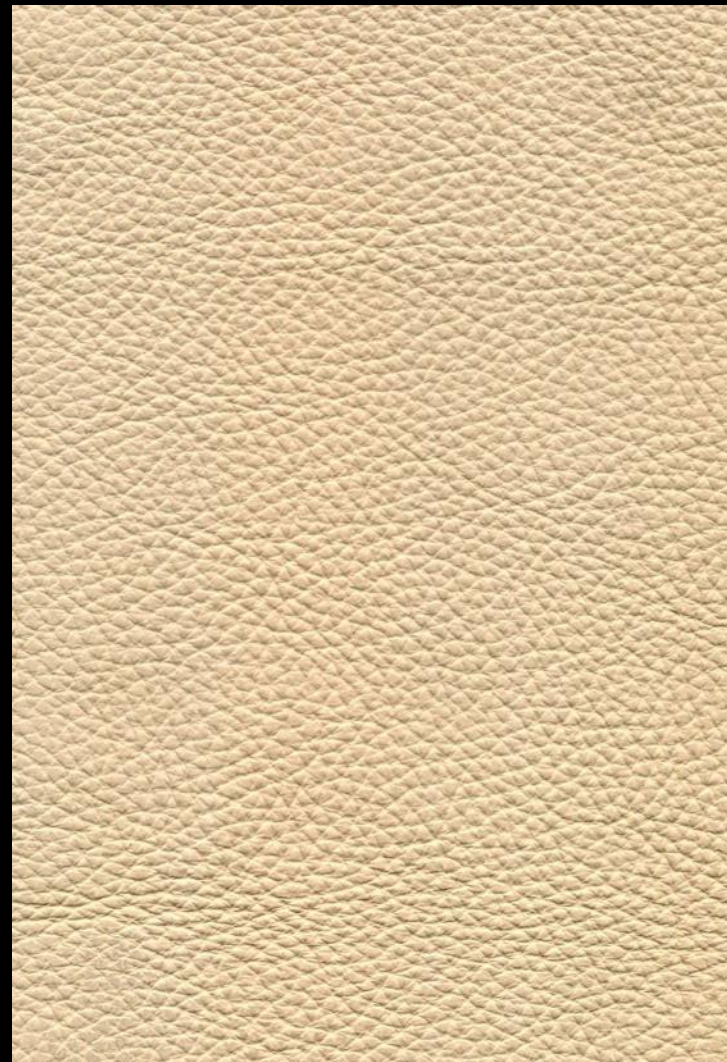


Lux 1

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm



400



60



455



471



439



438



453



454



408



421



404



448



437



62



478



423



402



472



424



444



441



426




425



452



456



63



427



403



446



428



451



429



449



412



431



413

Technical details


Origin	Raw hides
Place of origin	European
Thickness	1.3 / 1.5 mm
Lightfastness	ISO 105-B02: 7 blue scale
Tear strenght	ISO 3377-1: 89 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 4/5 grey scale Dry 500 cycles value 4 grey scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11644: 9,3 N/cm
Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette Test N°1:Match Test TB 117-A11: Cigarette Test (California)



Lux 2

cat. Lux

Pelle naturale - Natural leather
Spessore - Thickness 0.9/1.1 mm



810



811



812



815



826



836



837



838



834



835



830



832



818



819



820



823



822




824



839



843



842



847



844



845



825



852



853



856



851



855



854



827



860



859



858



864

Technical details

Origin	Raw hides
Place of origin	European
Thickness	0.9 / 1.1 mm
Lightfastness	ISO 105-B02: 7 blue scale
Tear strenght	ISO 3377-1: 56 N/mm
Fastness to rubbing	ISO 11640: Wet 150 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 20.000 cycles
Adhesion of finish	ISO 11644: 5 N/cm
Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette test N°1:Match test IMO FTP: Part 8-resolution A.652 (16) TB 117-A11: Cigarette test (California)



Imperial 1

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.3 / 1.5 mm



720



724



727



731



721



722



723



735



725



726



728



729



730



732



733



734

Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.3 / 1.5 mm
Lightfastness	ISO 105-B02: 8 blue scale
Tear strenght	ISO 3377-1: 121 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 4 grey scale Dry 500 cycles value 4/5 grey scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11644: 13.4 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)



Imperial 2

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.1 / 1.2 mm



500



501



502



520



522



524



540



541



542




N46



558



560



504



526



505



508



510



512



N47



N98



531



532



536



538



543



546



549



547



553



557



561



564



565



566



567



569

Imperial 2

Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.1 / 1.2 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 28 N/mm
Fastness to rubbing	ISO 11640: Wet 80 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 25.000 cycles
Adhesion of finish	ISO 11644: 7.5 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)




Nabuk

cat. Imperial

Pelle naturale - Natural leather
Spessore - Thickness 1.4 / 1.6



45



5



66



28



12



17



18



75



46



57



44



48



35



15



11



16



27



25



67



59



14



26



37



68



29



30



53



74



61



50



47



19



13



60



49



69

Technical details

Origin	Raw hides
Place of origin	Italy
Thickness	1.4 / 1.6 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 126 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 3/4 gray scale Dry 500 cycles value 3/4 gray scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11640: 5 N/cm
Flame retardant	BS 5852 cigarette and machth test Classe 1 IM
Features	Water repellent treatment Easy to clean Soft touch



lollipop



winegum



candybar



menthol



peppermint




popsicle




pastille



pistachio



candycane



popcorn



cottoncandy



tumtum



bonbon



machron




toffee



cookie



meringue



salt



bitter



licorice

Drop

cat. Special

60% wool - 20% polyamide - 20% polyester
Flame retardant - 80.000 Martindale

laCividina	cat. Special	Drop	Technical details	
			Composition	60% wool - 20% polyamide - 20% polyester
			Weight	Gr./m² 600
			Abrasion test	Martindale - ISO 12947-2: 80.000 rubs
			Lightfastness	ISO 105-B02: 6/7
			Pilling	ISO 12945-2: 4
			Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4
			Flame retardant	EN 1021-1/2 cigarette & match BS 5852 part 1 cigarette & match DIN 4102-B2 surface ignition US Cal. Tech. Bull. 117
			Features	Stretch material
		Environment	Oeko-Tex 100 certified Ecologically produced in Europe	
		2018		




banana

Triangle

cat. Special


17% wool - 5% polyamide - 13% polyester -
65% polyester filling
Flame retardant - 60.000 Martindale

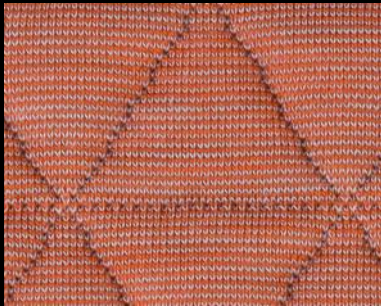


blush



oase

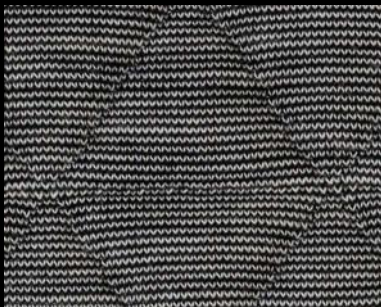


chalk

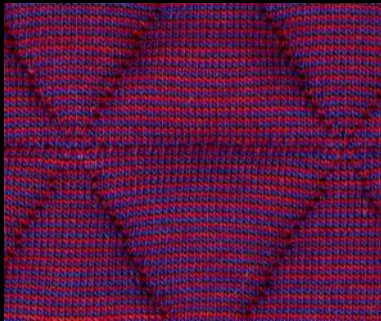


blueberry



pebble

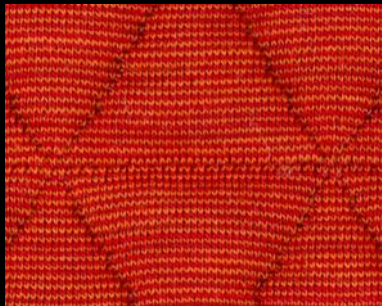

flame

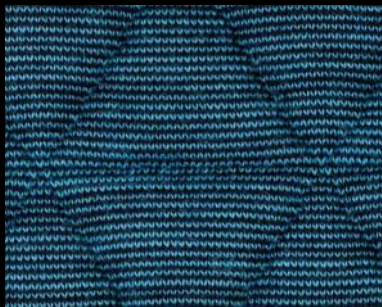

hydro



brownie



smoke



rumba



swamp



charcoal



ice



copper



violet



saffier

Technical details

Composition	17% wool - 5% polyamide - 13% polyester - 65% polyester filling
Weight	Gr./m² 875
Abrasion test	Martindale - ISO 12947-2: 60.000 rubs
Lightfastness	ISO 105-B02: 7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	EN 1021-1/2 cigarette & match BS 5852 part 1 cigarette & match DIN 4102-B2 surface ignition US Cal. Tech. Bull. 117
Features	Stretch material
Environment	Oeko-Tex 100 certified Ecologically produced in Europe



MAHORA
— CONCEPT —

Mahora Concept
21 rue Gounod
92210 Saint-Cloud
01 87 124 124

www.mahora-concept.com