




MAHORA  
— CONCEPT —

# NUANCIER

Retrouvez dans la table des matières, page suivante, votre produit ainsi que les matériaux et les coloris dans lesquels il est disponible.

**Attention : les coloris peuvent varier selon les réglages et la luminosité de votre écran.  
Un doute ? Une question ? Contactez-nous au 01 87 124 124**




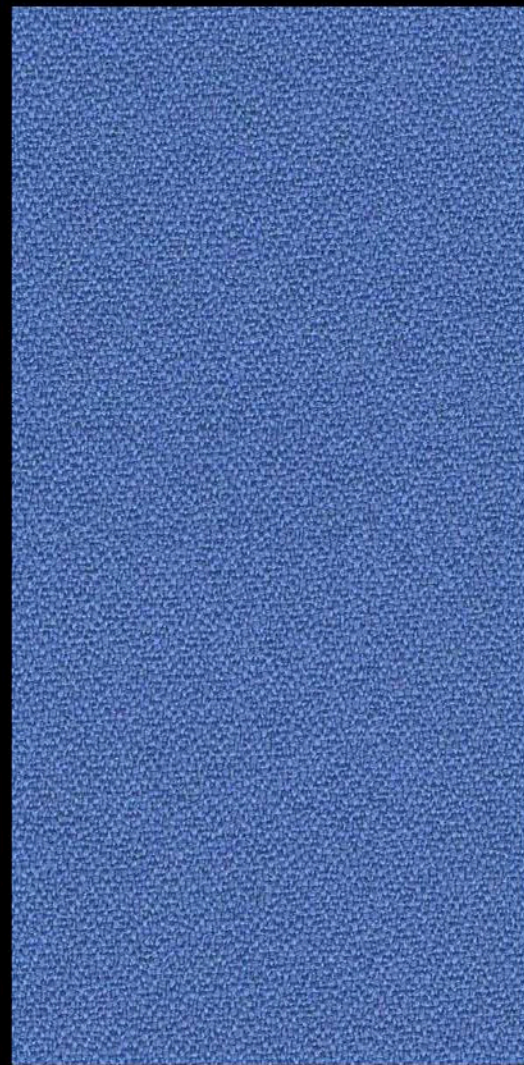


Xtreme

cat. A

100% recycled polyester FR  
Flame retardant - 100.000 Martindale



Parasol YS073




Ocean YS100



Scuba YS082



Costa YS026




Navassa YS162




Martinique YS004



Bluefield YS021



Bluebell YS097




Cayman YS024




Leeward YS164




Curacao YS005




Orchilla YS167




Campeche YS074



Montserrat YS011




Appledore YS077




Apple YS096



Taboo YS045



Tonga YS160




Windjammer YS047



Bridgetown YS102



Mauve YS069



Tarot YS084




Anguilla YS169



Sombrero YS046



Krabi YS141



Twister YS083




Osumi YS171



Steel YS095




Blizzard YS081



Slip YS094



Padang YS145



Rum YS173



Manado YS166




Aruba YS108




Solano YS072



Lobster YS076



Jamaica YS027



Tortuga YS168



Panama YS079




Tokara YS136



Calypso YS106



Diablo YS101




Tobago YS030



Sandstorm YS071



Nougat YS091



Bounty YS086



Havana YS009



Arawak YS016



Xtreme


## Technical details

Composition	100% recycled polyester FR
Weight	Gr./m <sup>2</sup> 310
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard DIN 4102-B1 NF D 60-013 UNI 9175 Classe 1 IM BS 476 Part 7 Class 1
Environment	Certified to the EU Ecolabel Certified to OEKO-TEX® Standard 100 Made from 100% recycled polyester

cat. A

2018



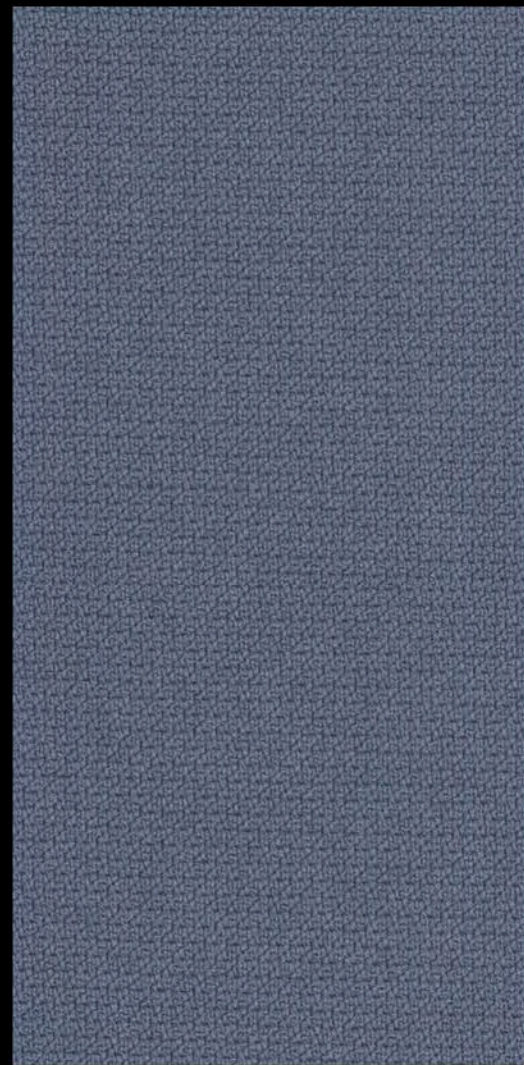


60004




66019



60999



60091



60011




60090




61149



62057




61103



61150



60021



63082



63012



63075



61102




64180




64179



64177



64013



65092



65023



65047




65093




65094



65090



65091



65018



66152



66148




66018



66151



65011




67004




67072



67073



67007



68158



68118



68159



68160




68161



68163



68162



68120



68121



62073



68164



68165

Step


cat. A

100% Trevira CS  
Flame retardant - 100.000 Martindale



Composition	100% Trevira CS
Weight	Gr./ml. 470
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO DIN 4102 B1 NFP 92-503/504/505 M1 BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & match BS 5852 Crib 5 ÖNORM B 3825-B1-3800-Q1 UK FAR/JAR 25.853 (a) (i) (ii) BS 7176 Medium hazard AM 18 - NF D 60-013-(only for fabric) CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME DIN EN 13501-1 B-s1,d0
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals




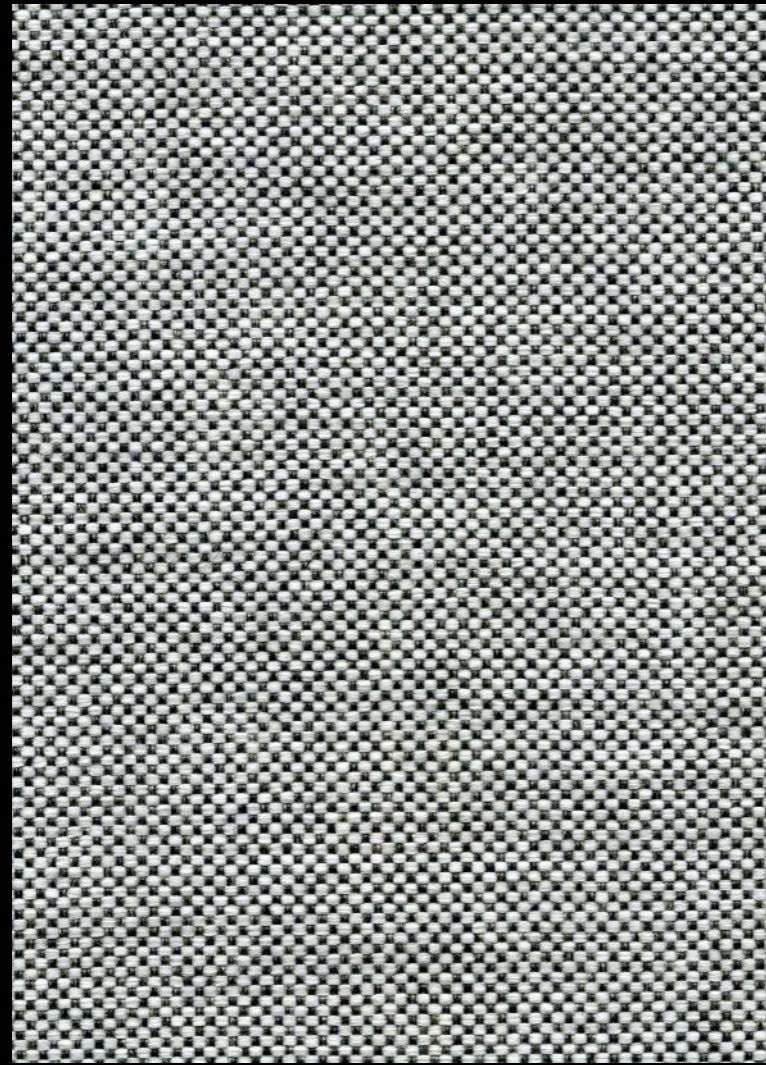


Angel

cat. A

100% PP FR (Nativa)  
Flame retardant - 50.000 Martindale



601



600



201



203




408



200



102



401



400



402



503



403



404



406




405




700



706



705



307




310



500



304



302



311



800



803



802



702



Angel


## Technical details

Composition	100% PP FR (Nativa)
Weight	Gr./m <sup>2</sup> . 350
Abrasion test	Martindale - ISO 12947-2: 50.000 rubs
Lightfastness	ISO 105-B02: 4/5
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 5
Flame retardant	UNI 9175 Class 1IM NF D 60-013:2006 (AM18) BS 5852 IS Crib 5 EN 1021 Part.1-2 USA Calif. Bull. 117:2013 FTP Code 307(88):10 Annex 1 Part 8
Features	Antistatic No-shrink Stain resistance Hypoallergenic Antibacterial Water repellent

cat. A

2018



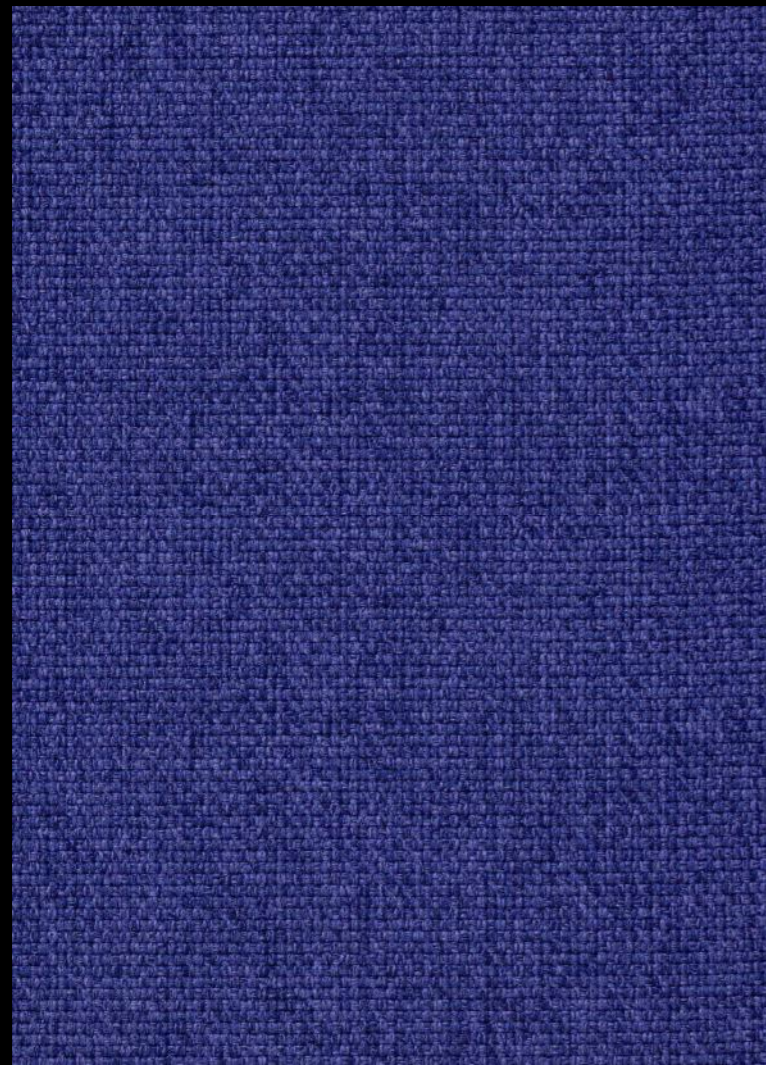

# Medley

cat. A

100% polyester  
Flame retardant - 75.000 Martindale



66008



60004



60999



60003



61002



61003



61004



61189



62054



62002



67002



63013




63017




63016



64019




64125




64123




65011




65012



66145




67052



66009



66010



67006



66007



68114



68002



68005



## Technical details

Composition	100% polyester
Weight	Gr./ml. 510
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Part 1 0,1 Cigarette & match BS 476 Part 7, class 2 Class Uno UNI 9175 Class 1 I EMME Class Uno UNI 9174 - UNI 8457 ÖNORM B 3825-B2-3800-Q1 UK CA TB 117-2013 ASTM E 84
Environment	Oeko-Tex 100 certified 100% free of heavy metals






# Mood

cat. A


72% PVC - 25% cotton - 3% polyurethane  
Flame retardant - 50.000 Martindale



1




2




3



4



5



6



7



8



9



10



11



12



13



14



15



16




17



18




19



20



21




22




23




24



25



26



27



28



## Technical details

Composition	72% PVC - 25% cotton - 3% polyurethane
Weight	Gr./m <sup>2</sup> 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Lightfastness	ISO 105-B02: 6
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	IMO resolution A.652 (16): 1989 BS 5852 crib 5 BS 5852-1 part I EN 1021-2 UNI 9175 CLASSE 1 IM TB 117 sez. E – p.1 (California)
Treatment	VINYZENE: an anti-microbial and anti-mould agent certified by <b>Bio-Pruf</b>
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to UV rays Resistance to mould and bacteria Outdoor





1001



1002




1003




1004



1005

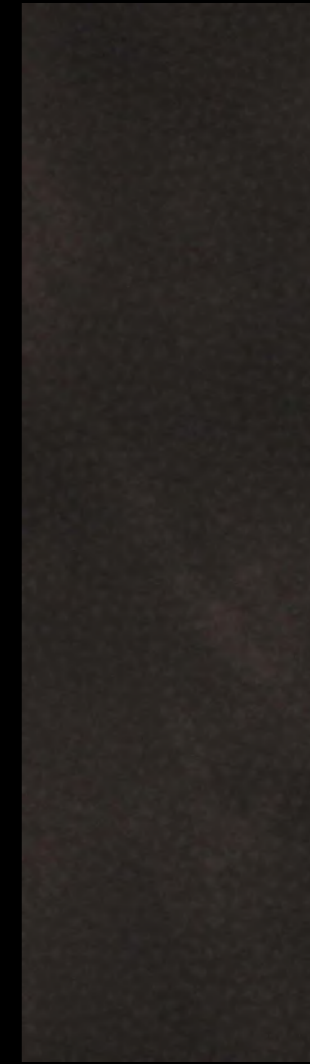

1006

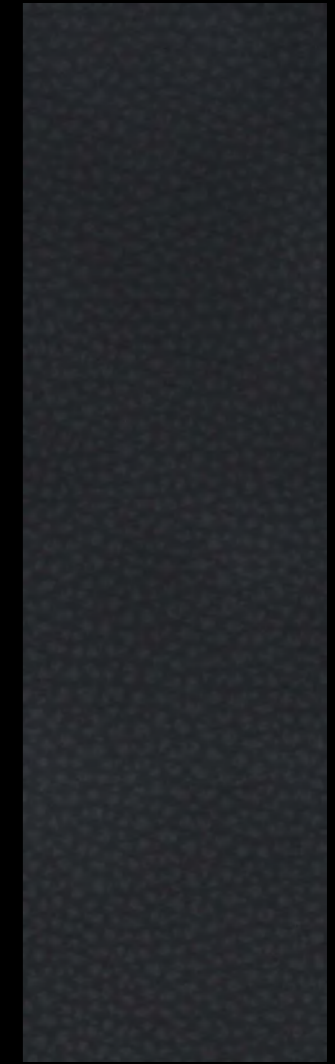

1007

# Crazy

cat. A


80% PVC - 18% polyester - 2% polyurethane  
Flame retardant - 50.000 Martindale



## Technical details

Composition	80% PVC - 18% polyester - 2% polyurethane
Weight	Gr./m <sup>2</sup> 600
Abrasion test	Martindale - ISO 5470-2: 50.000 rubs
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	UNI 9175: classe 1IM EN 1021-2
Features	Comfort and elasticity Tear strength Easy to clean Waterproof Fire resistance





450



3650




3750



150



250



350



1150



3250



750



1250



1350



2850



2750



4850



1050



950



850



4350



4050



3550



3150



550



650



2350



2950



2450




1650



3950



1550



1450



4650



3850



4550



4150



3350



4750



2550



1850



2650



1950



4250




1750



3050



3450



2050



4450



2150



2250

# Extrema

cat. B

63% polyurethane - 29% cotton - 8% polyester  
Flame retardant - 150.000 Martindale



# Extrema

## Technical details

Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m <sup>2</sup> 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5/6
Solidity to sweat	ISO 105-E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E - p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free





Ikon

cat. B

63% polyurethane - 29% cotton - 8% polyester  
Flame retardant - 150.000 Martindale



130



230




330



430



530



630



730



830



930



1030



1130



1230



1330



1430



1530



1630



1730



1830



1930




2030



2130



2230



2330




2430



## Technical details

Composition	63% polyurethane - 29% cotton - 8% polyester
Weight	Gr./m <sup>2</sup> 480
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105 B02: 5/6
Solidity to sweat	ISO 105 E04: 4/5
Flame retardant	BS 5852 crib 5 BS 5852-1 part I IMO resolution A.652 (16): 1989 EN 1021-2 UNI 9175 classe 1 IM TB 117 sez.E - p.1 (California)
Treatment	ULTRA-FRESH: Anti-microbial agent
Features	Comfort and elasticity Waterproof Easy to clean Fire resistance Resistance to mould and bacteria Phthalates free

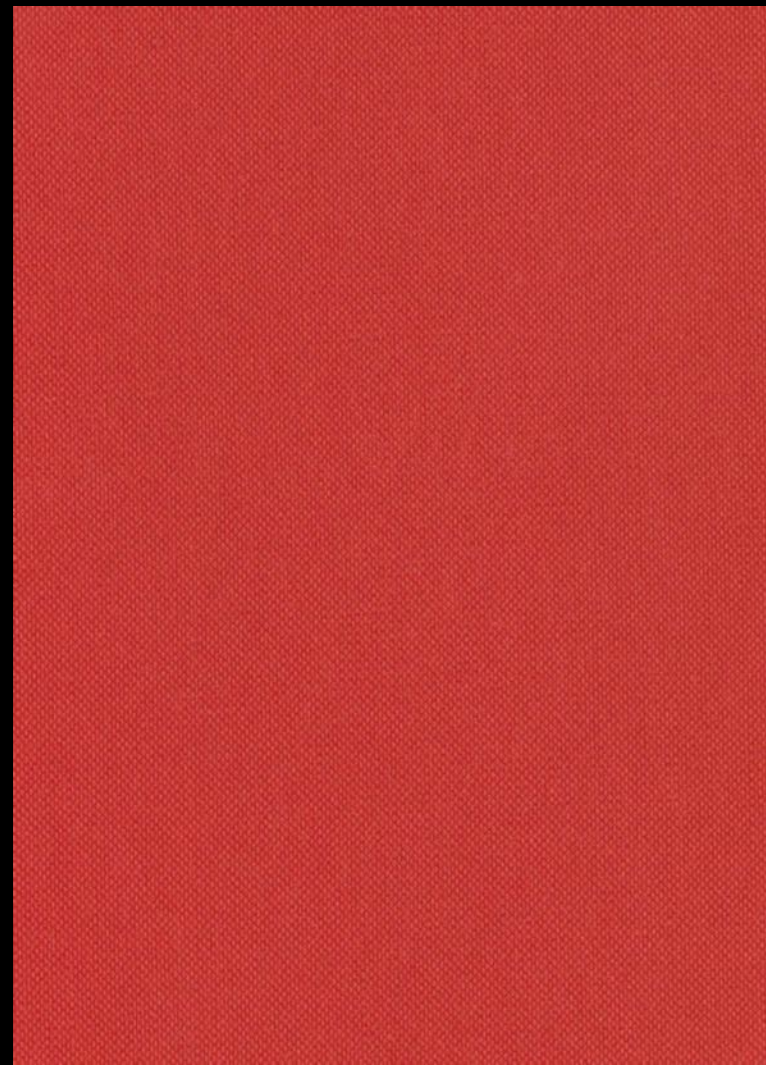

# Silvertex

cat. B

Vinyl Urethane Topcoat and 100% Polyester Hi-Loft2  
Flame retardant - 300.000 Martindale



4004 ice



1077 cream




1051 sisal




1010 beige



0009 taupe



6065 safran



6062 melon



2003 cobre



6061 mandarin



2011 red




2064 wine



0005 mocca



0073 luggage



5008 pistacho



5020 basil



5063 forest



2016 raspberry



4001 plata



12526 tempesta



9002 carbon



13138 black



3066 baltic



3067 delft



3007 sapphire




4024 meteor



## Technical details

Composition	Content: 100% Vinyl Urethane Topcoat Backing: 100% Polyester Hi-Loft2
Weight	Gr./m <sup>2</sup> 685
Abrasion test	Martindale - ISO 12947:1999 Part 2: 300.000 rubs
Flame retardant	UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) EN 1021 Part 1 & 2 UNE 23.727-90 1R/M.2 NF P 92-503/M2 DIN 4102 B2 ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 FMVSS 302 FAR 25/853 (MED) Marine Equipment Directive (in its current valid version) ECE R118 (replaces Directive 95/28/CE) EN 71-2:2006+A1:2007 - Safety of toys - Part 2: Flammability
Finishes and treatments	PERMABLOK3® SILVERGUARD® Anti-stain Finish Cold Crack -23°C Mildew resistant backing and face UV-Resistance XENOTEST DIN 54004/ NTC 1479 EN 71-3 Safety of Toys (Migration of certain elements) Sulfide Stain Resistant Anti-static Finish



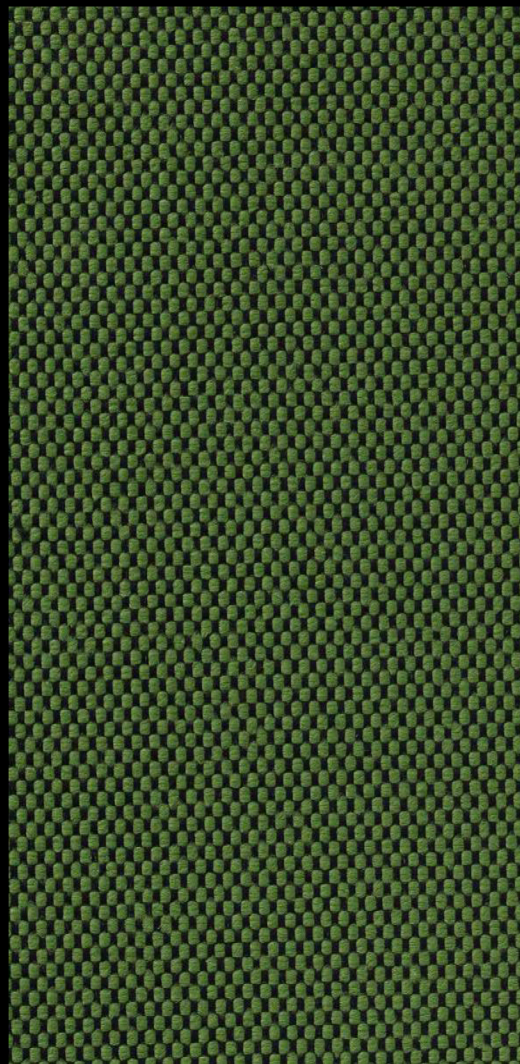


7052.01




7052.02



7052.04




7052.05




7052.07




7052.08




7052.09



7052.10



7052.11



7052.12




7052.13




7052.14




7052.16




7052.17




7052.19




7052.21



7052.22




7052.23




7052.24




7052.25



7052.26



7052.27



7052.29




7052.30



7052.33




7052.34



7052.36



7052.38



7052.39




7052.40



7052.41




7052.42



7052.43



7052.44



7052.45




7052.46



7052.47



7052.49



7052.50



7052.51

# Samar

cat. B

100% polyester FR  
Flame retardant - 50.000 Martindale



# Samar


## Technical details

Composition	100% polyester FR
Weight	Gr./ml. 660
Abrasion test	Martindale - ISO 12947-2: 50.000 rubs
Lightfastness	ISO 105-B02: 6
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1
Environment	Oeko-Tex 100 certified






60005



60078




61136



61135



60017



61060



60019




60051




61003



61047




61044



64167



64169



64165



63016



64119



64089



64058



65082



64055




65084



66130




66131



66075




66032



67068



66133



67016



67004




68147



68145



68035



67069




67067



68143



67005




62067



62068



68004



68148

# Fame

cat. B

95% wools of New Zealand - 5% polyamide  
Flame retardant - 200.000 Martindale




# Fame

## Technical details

Composition	95% wools of New Zealand - 5% polyamide
Weight	Gr./ml. 630
Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Crib 5 CA TB 117-2013 Class Uno UNI 9175 Class 1 I EMME AM 18 - NF D 60-013 BS 5852 Part 1 0,1 Cigarette & Match ÖNORM B 3825-B1-3800-Q1 UK IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO BS 476 Part 7, class 1 DIN 4102 B1 (flame retardant) NF P 92-503 M2 (flame retardant) BS 7176 Medium hazard (flame retardant)
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals




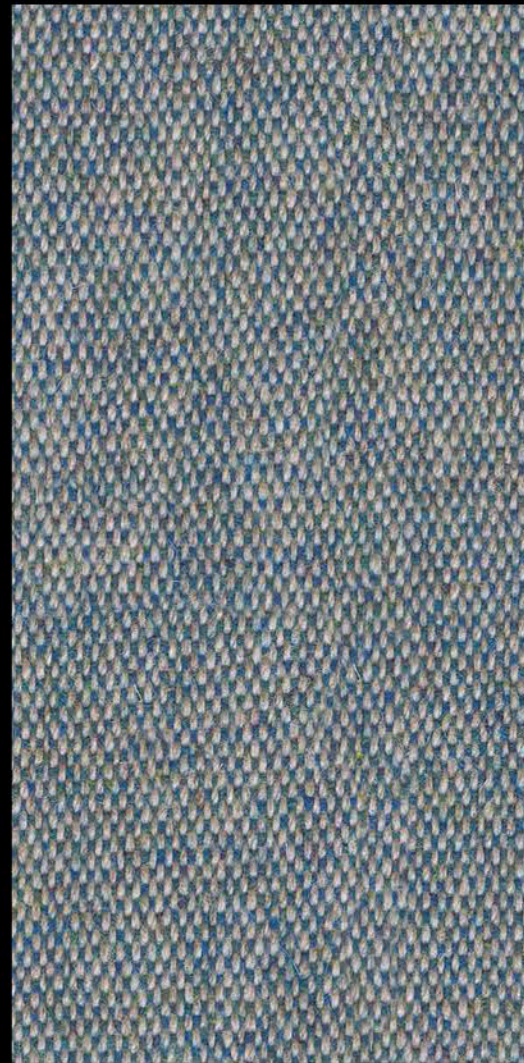

Waterloo MLF21




Bethnal MLF25




Newbury MLF10




Westminster MLF22




Charing MLF27




Brompton MLF35




Holborn MLF05




Pimlico MLF34



Stanmore MLF37




Bayswater MLF24




Russell MLF38



Finsbury MLF30




Kensington MLF07



Goldhawk MLF31



Greenford MLF32



Monument MLF09




Farringdon MLF29



Tufnell MLF18



Highgate MLF33



Camden MLF26




Temple MLF16




Barbican MLF03




Tower MLF36




Archway MLF02



Morden MLF12



Lambeth MLF08




Upminster MLF20




Bank MLF23




Tooting MLF17




Leyton MLF13




Aldgate MLF01



Parsons MLF14




Kilburn MLF06




Euston MLF04



Hillingdon MLF41




Wembley MLF11




Northfields MLF40



Paddington MLF39



Stockwell MLF15



Edgware MLF28

# Main Line Flax

cat. B

70% virgin wool - 30% flax  
Flame retardant - 50.000 Martindale



# Main Line Flax

## Technical details

Composition	70% virgin wool - 30% flax
Weight	Gr./m <sup>2</sup> 435
Abrasion test	Martindale - ISO 12947-2: 50.000 rubs
Lightfastness	ISO 105-B02: 5
Fastness to rubbing	ISO 105-X12: Wet 3 Dry 4
Flame retardant	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 UNI 9175 Classe 1 IM
Environment	Certified to the EU Ecolabel Made from wool and bast fibre



# Trend

cat. C

82% PVC - 14% cotton - 4% polyester  
Flame retardant - 50.000 Martindale



3150



3153



3152



3151



4152



3171




4696



3156



3159



3158



3160



4166



3165



4156



4161



4168



3176



4165



3166



3175



3163




4699



3161



4163



4701



4164



3169



3170



## Technical details

Composition	Content: 82% PVC Backing: 14% cotton - 4% polyester
Weight	Gr./m <sup>2</sup> 870
Abrasion test	Martindale - BS 5690: 50.000 rubs
Lightfastness	DIN 75202: 6/7
Fastness to rubbing	ISO DIN 54021: Wet 5 Dry 5
Flame retardant	DIN 75200 B1AT MVSS 302 DIN EN 1021 Parte. 1+2 M2 BS 5852/CRIB5 5,3 CH CL. 1IM FAR 25853 IMO A. 652(16)
Features	Waterproof, unchangeable, anallergic Resistance to UV rays, sweat, ripping, saliva, urine, salt and chlorinated water Free of CD, AZO, FCKW, PCB, FORMALDEIDE and other substances dangerous for health



101



103



104



109



143



142



141



131



132



134



135



136



137



138



111



112



113



114



116



117



118



124



128



127



126



125



129



130

# Superb

cat. C

100% polyester FR  
Flame retardant - 60.000 Martindale





Superb

Composition

100% polyester FR

Weight

Gr./m<sup>2</sup> 400

Abrasion test

Martindale - ISO 12947-2: 60.000 rubs

Lightfastness

ISO 105-B02: 5

Pilling

ISO 12945-2: 5

Fastness to rubbing

ISO 105-X12: Wet 4  
Dry 4

Flame retardant

EN 1021 1-2  
UNI 9175 classe 1 IM  
UNI 9177 classe 1  
BS 5852 crib 5  
NF 92.503 M1  
DIN 4102 B1


Features

Tear strenght  
Fire resistance  
Easy to clean


### Technical details

cat. C



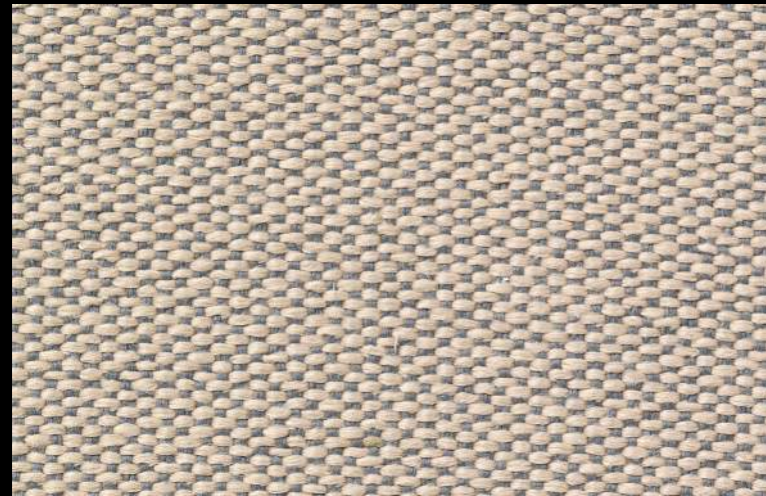

7048.01 P

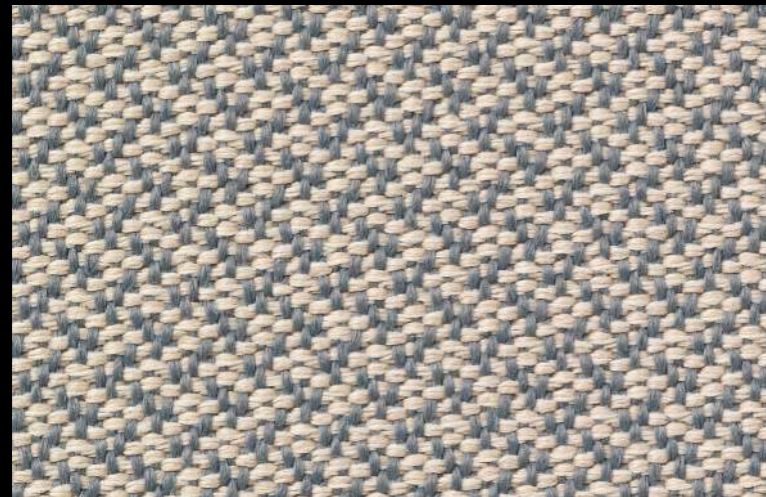


7048.01 M




7048.02 P




7048.02 M




7048.03 P




7048.03 M




7048.04 P




7048.04 M




7048.05 P




7048.06 P




7048.06 M



7048.07 P




7048.07 M



7048.08 P




7048.08 M




7048.05 M




7048.09 P



7048.09 M



7048.10 P




7048.10 M




7048.11 P




7048.11 M




7048.12 P



7048.13 P




7048.13 M




7048.14 P




7048.14 M



7048.15 P



7048.15 M



7048.12 M

# Deans

cat. C

100% polyester FR  
Flame retardant - 110.000 Martindale




## Technical details

Composition	100% polyester FR
Weight	Gr./ml. 861
Abrasion test	Martindale - ISO 12947-2: 110.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4 ASTM D3511: 3
Fastness to rubbing	ISO 105-X12: Wet 4-5 Dry 4-5 AATC 8: Wet 5 Dry 5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92/503-507, M1 DIN 4102, B1 IMO 2010 FTP part 8 UNI 9175, classe 1 Cal TB 117-2013
Features	Double faced upholstery, with a plain look on one side and a mélange pattern on the other side
Environment	Oeko-Tex 100 certified






113



123



133




143



152



163




173




183



223




233



242



252



362



373



383



393



412



422




433



443




452



543



612



632



643



653



662



672



682



692




722



733



743




762



773



783



823



842



852




873



912



923



933



942



954



962



973



982

# Remix 2

cat. Super

90% new wool worsted - 10% nylon  
Flame retardant - 100.000 Martindale



# Remix 2

Composition

90% new wool worsted - 10% nylon

Weight

Gr./ml. 415

Abrasion test

Martindale - ISO 12947-2: 100.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Flame retardant

AS/NZS 1530.3  
AS/NZS 3837, class 2  
BS 5852 Crib 5 with treatment  
BS 5852 part 1  
EN 1021-1/2  
IMO FTP Code 2010 Part 8  
NF D 60 013  
NFPA 260  
UNI 9175 1IM  
US Cal. Bull. 117-2013  
ÖNORM B1/ Q1

Environment

Complies with EU ecolabel "The Flower"





4102



4001



4601




5501



4101



4801



4401



4201




4803



4802




4301



4702



4701



4501



5401



5402



5201



4902



4901



5002



5001




5103



5102



5101



5301

# Capture

cat. Super

85% wools of New Zealand - 15% polyamide  
Flame retardant - 200.000 Martindale



# Capture


## Technical details

Composition	85% wools of New Zealand - 15% polyamide
Weight	Gr./ml. 475
Abrasion test	Martindale - ISO 12947-2: 200.000 rubs
Lightfastness	ISO 105 B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match Class Uno UNI 9175 Class 1   EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals






1101



1102



2101



2104



1104




1103




3101



2102



4101



5101



3102



5102



5104



3103



4102



5103



2103



6101



4103



3104

# Moda

cat. Super

92% wools of New Zealand - 8% polyamide  
Flame retardant - 95.000 Martindale



Technical details

Composition	92% wools of New Zealand - 8% polyamide
Weight	Gr./ml. 555
Abrasion test	Martindale - ISO 12947-2: 95.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & Match BS 476 Part 7, class 1 Class Uno UNI 9175 Class 1   EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals





4003



4101



4103



4001



4004



4202




4104



4102




4002




4301



4303



4302



4401



4402



4503



4501



4502



4601



4602



4603



4604

# Breeze Fusion

cat. Super

88% wools of New Zealand - 12% polyamide  
Flame retardant - 100.000 Martindale



4804



4803



4802



4201



4801




# Breeze Fusion

## Technical details

Composition	88% wools of New Zealand - 12% polyamide
Weight	Gr./ml. 590
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match Class Uno UNI 9175 Class 1   EMME CA TB 117-2013
Environment	Oeko-Tex 100 certified EU Ecolabel 100% free of heavy metals



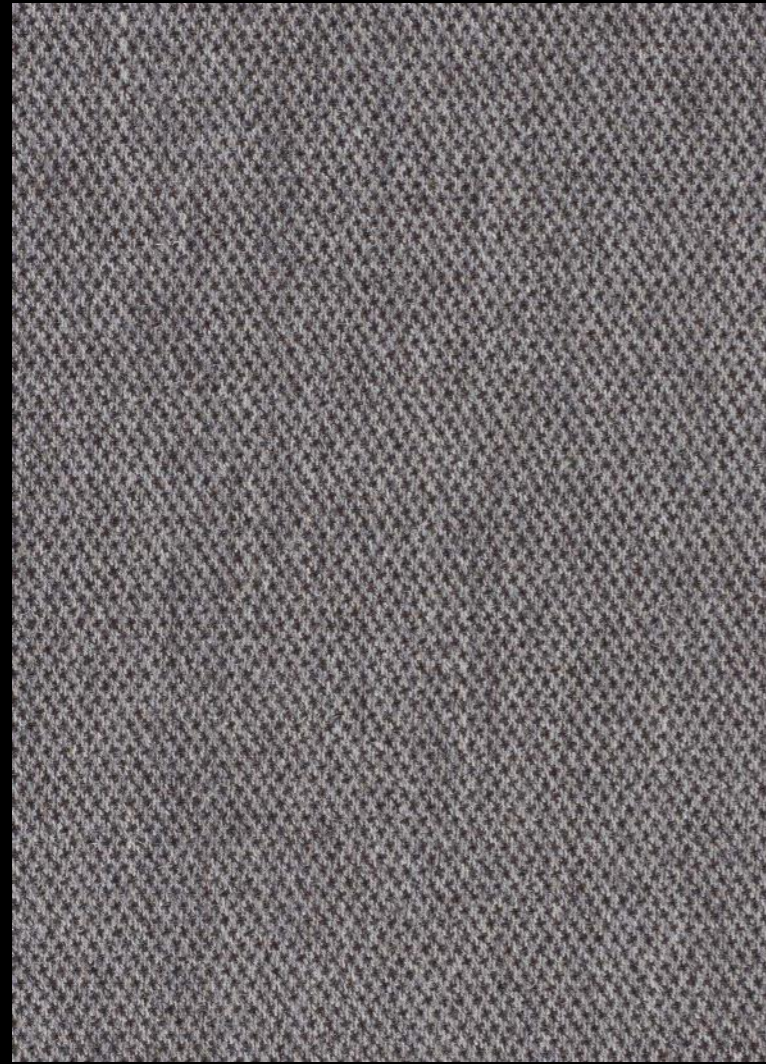


# Molly

cat. Extra

100% new wool worsted  
Flame retardant - 75.000 Martindale




110



122



164




192




112




114



116




152



154



160††




166



170



190



194



196




Molly

## Technical details

Composition	100% new wool worsted
Weight	Gr./ml. 690
Abrasion test	Martindale - ISO 12947-2: 75.000 rubs
Lightfastness	ISO 105-B02: 4/7
Pilling	ISO 12945-2: 3/4
Flame retardant	EN 1021-1/2 DIN 4102 B2 ÖNORM B1/Q1 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013 NFPA 260 IMO FTP Code 2010: Part 8 BS 5852 part 1
Environment	Complies with EU ecolabel "The Flower"




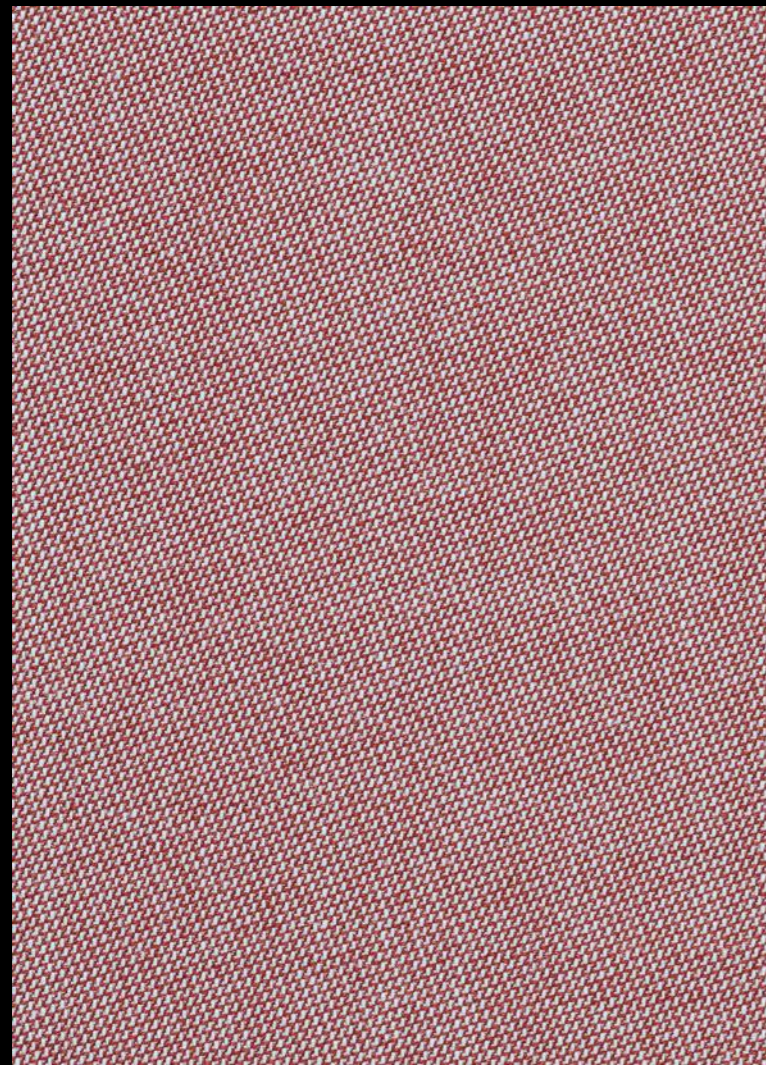


111




131




151




211



231



271




451



471




521




541




551



571



591




621




641



691



721



731



741



781



791



911




921



941



951



981



991

# Rime

cat. Extra

90% new wool worsted - 10% nylon  
Flame retardant - 100.000 Martindale




## Technical details

Composition	90% new wool worsted - 10% nylon
Weight	Gr./ml. 580
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5/6
Pilling	ISO 12945-2: 4
Flame retardant	AS/NZS 3837, class 2 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 ÖNORM B2/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"







105




113



124



133



153




176




195




205




213



246




253



266




276



283




336




376



383




416




426



446



453



466




476




515

# Steelcut Trio 3

cat. Extra



526




533




553



576



616



636




645




666




686



713



716




746


90% new wool worsted - 10% nylon  
Flame retardant - 100.000 Martindale




756




776



796




806




883




906




946




953




966



976



983



996



# Steelcut Trio 3

Composition

90% new wool worsted - 10% nylon

Weight

Gr./ml. 770

Abrasion test

Martindale - ISO 12947-2: 100.000 rubs

Lightfastness

ISO 105-B02: 5/7

Pilling

ISO 12945-2: 4

Flame retardant

AS/NZS 1530.3  
AS/NZS 3837 class 2  
BS 5852 Crib 5 with treatment  
BS 5852 part 1  
DIN 4102 B2  
EN 1021-1/2  
IMO FTP Code 2010: Part 8  
NF D 60 013  
NFPA 260  
ÖNORM B1/Q1  
SN 198 898 5.3 with treatment  
UNI 9175 1IM  
US Cal. Bull. 117-2013

Environment

Complies with EU ecolabel "The Flower"  
Greenguard and Greenguard Gold certified





7061.01



7061.02



7061.03



7061.05



7061.06




7061.07



7061.08



7061.09



7061.10



7061.11



7061.12



7061.13



7061.14



7061.17



7061.18



7061.19



7061.20



7061.21



7061.22



7061.23



7061.24



7061.27



7061.28



7061.29



7061.30



7061.31



7061.32



7061.35

# Ariana

cat. Extra


100% mohair (base: cotton)  
Flame retardant - 90.000 Martindale



## Technical details

Composition	100% mohair (base: cotton)
Weight	Gr./ml. 765
Abrasion test	Martindale - ISO 12947-2: 90.000 rubs Wyzenbeek - ASTM D4157: 100.000 double rubs
Lightfastness	ISO 105-B02: 5 AATCC 16.3: 40 hours: 3.5
Pilling	ISO 12945-2: 4/5 ASTM D3511: 5
Fastness to rubbing	ISO 105-X12: Wet 4-5 / Dry 4-5 AATCC 8: Wet 5 / Dry 5
Flame retardant	EN 1021/1-2 BS 5852, crib 5 NF P 92 / 503-507, M2 with FR finish DIN 4102, B2 UNI 9175, classe 1 IM Cal TB 117 NFPA 260, class 1 IMO 2010 FTP part 8
Environment	Cradle to cradle bronze certified
Cleaning	Dry clean only



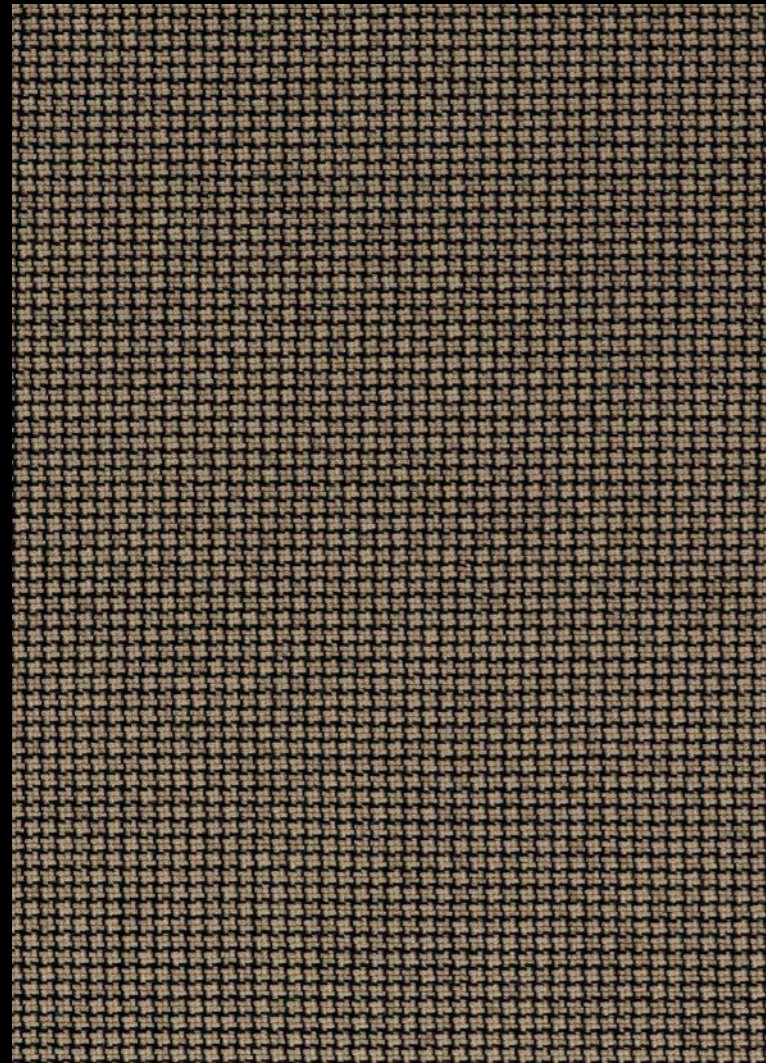


# Colline

cat. Extra


75% new wool worsted - 17% acrylic - 8% nylon  
Flame retardant - 100.000 Martindale



108




118



148



188




228



348



448



548



568



668



688




788



## Technical details

Composition	75% new wool worsted - 17% acrylic - 8% nylon
Weight	Gr./ml. 650
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6
Pilling	ISO 12945-2: 4/5
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 with treatment BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Natural fibres / Sustainable resource




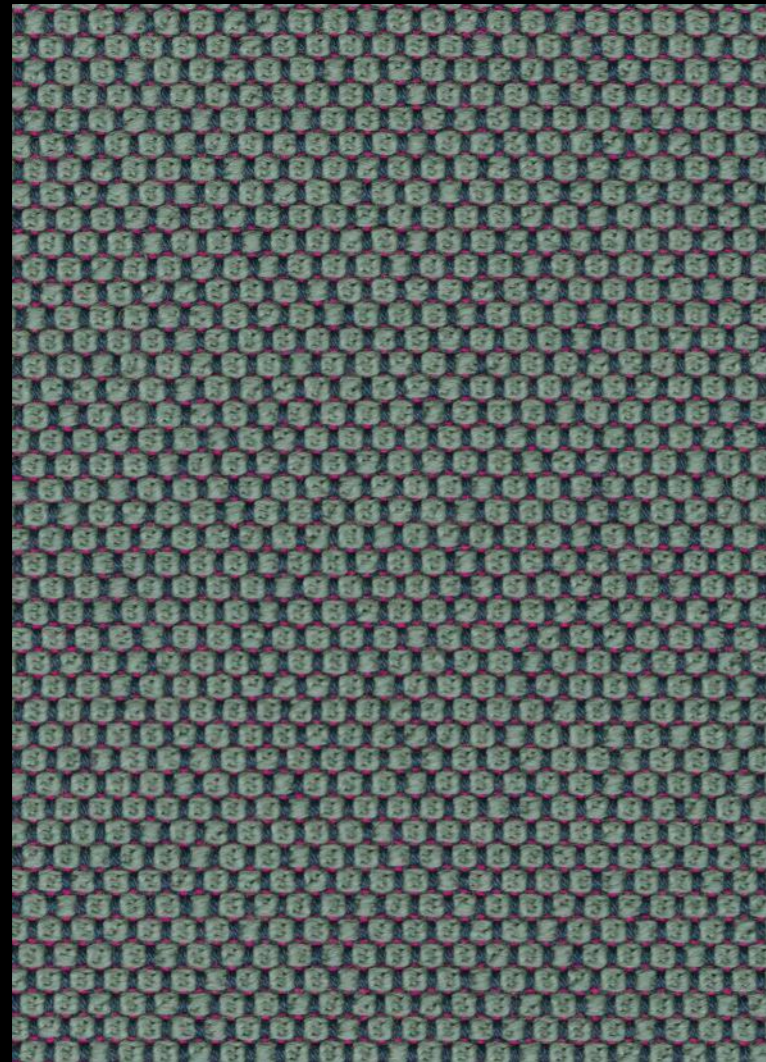

# Opera

cat. Extra

96% virgin wool - 4% polyamide  
Flame retardant - 90.000 Martindale



mirror



fango



taupe



flanell




macadamia



calla




kristall



pepper



ebony



kies




anthrazit



rosewood



sorbet




aureo



prime




maple




lake



brick



jade



bleu



delft



navy



delphi



indio



guave



clementine



aloe



smaragd




# Opera


## Technical details

Composition	96% virgin wool - 4% polyamide
Weight	Gr./ml. 1010
Abrasion test	Martindale - ISO 12947-2: 90.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3



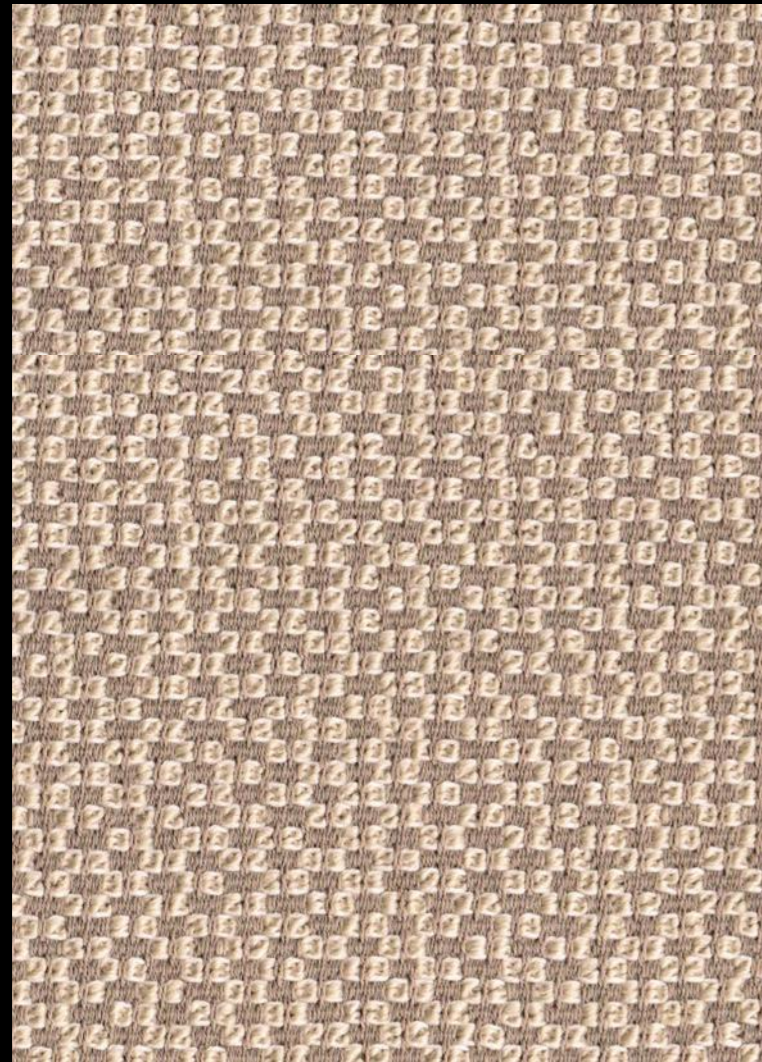

passion



litchi




lava



terra




curry



tivoli



tropic



jaspis



viola



pepper



graphit



lanoso



black



rosewood



coffee



prime



crisp



taupe



flanell



kies



chrom



almond



snow



angora

# Dante

cat. Extra

95% virgin wool - 5% polyamide  
Flame retardant - 52.000 Martindale



## Technical details

Composition	95% virgin wool - 5% polyamide
Weight	Gr./ml. 920
Abrasion test	Martindale - ISO 12947-2: 52.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 UNI 9175 (1 IM) IMO: 2014/90/EU Marine Equipment Directive
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3





cloud



biber



coast



sepia



lanoso



black



ebony



muskat



fossil



taupe




flanell



calla



snow




jasmin



bast




limette



safran




coral



granat



heart




blackberry



henna




cassis



elegant



velvet



zinn



opal



monte

# Arco

cat. Extra


95% virgin wool - 5% polyamide  
Flame retardant - 70.000 Martindale




## Technical details

Composition	95% virgin wool - 5% polyamide
Weight	Gr./ml. 980
Abrasion test	Martindale - ISO 12947-2: 70.000 rubs
Lightfastness	ISO 105-B02: 5/8
Pilling	ISO 12945-2: 4/5
Flame retardant	FAR 25.853 (12 sec. vertical) CAL TB 117 - 2013 DIN 4102-1 B2 EN 13501-1 EN 1021 1/2 BS 5852:2006 (part1) BS 5852:2006 (part2) Crib5 IMO: 2014/90/EU Marine Equipment Directive NF D 60-013 (Art. AM 18)
Special finishes	Anti-shrink, anti-pilling, yarn dyed
Environment	Natural, renewable material RAL-UZ 117 Attachment 2+3




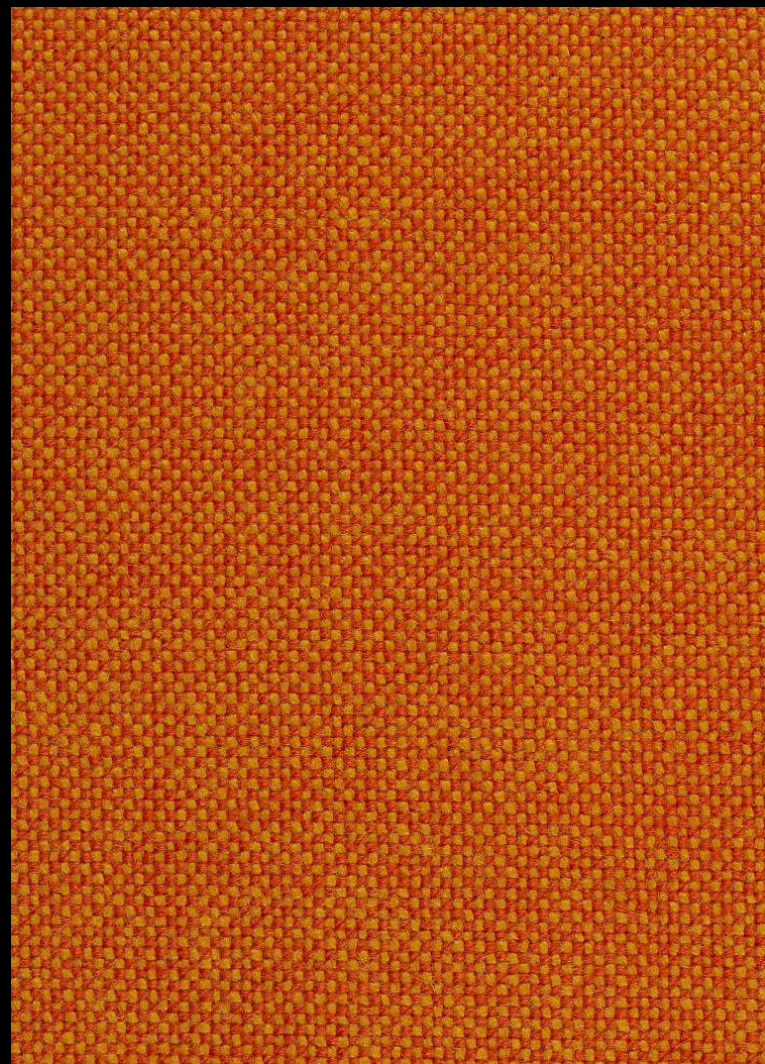


100




103




110




113




116



123



130



190



200




220



227



270



368



370




547




563



573



590



600



657




674




750



753




754



763



764



773




810

# Hallingdal 65

cat. Maxi

70% new wool - 30% viscose  
Flame retardant - 100.000 Martindale



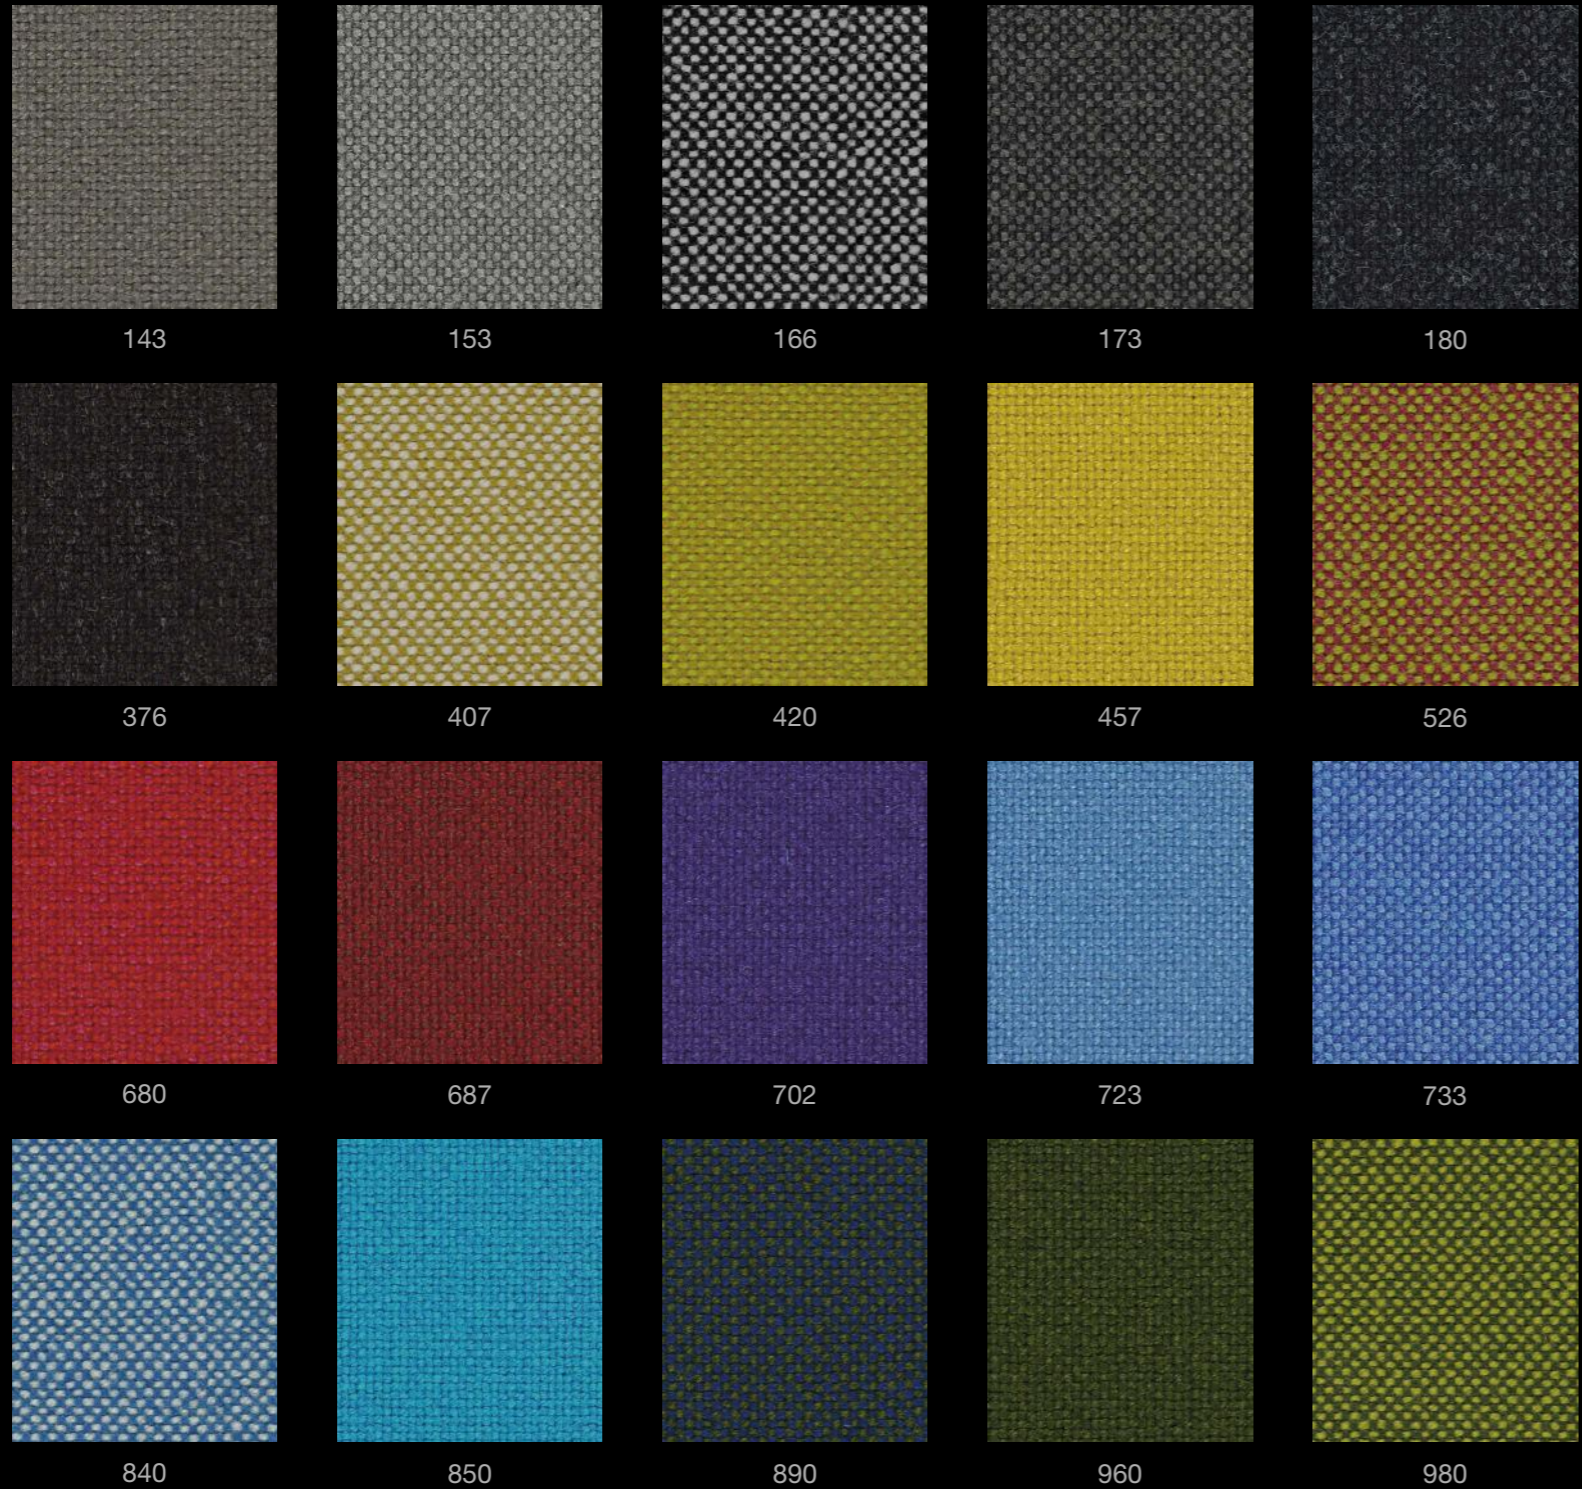


Hallingdal 65

Technical details

Composition	70% new wool - 30% viscose
Weight	Gr./ml. 795
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 AS/NZS 3837 BS 5852 Crib 5 BS 5852 part 1 DIN 4102 B2 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013
Environment	Complies with EU ecolabel "The Flower"




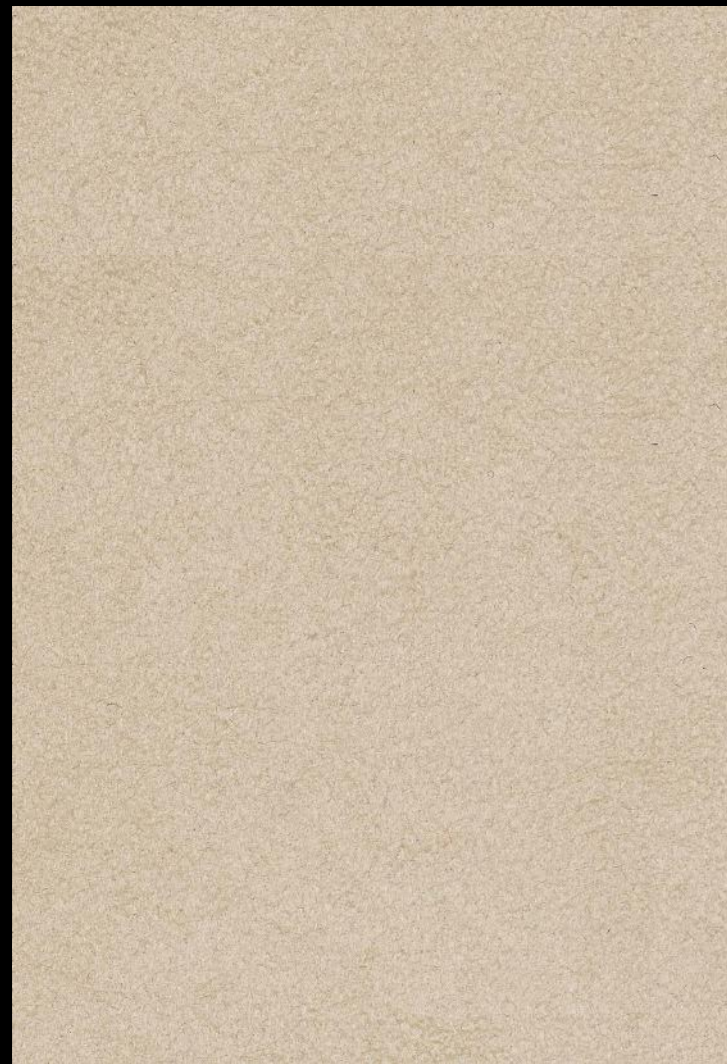


# Comfort

cat. Maxi

88% polyester - 12% polyurethane  
Flame retardant - 150.000 Martindale




63001



64002



64001



64003



1414




29




64009



65003




1043



66002



1124



66008




40




35



67001



8422



8384



280



5



10




62003



62004



68001



68003



68011



8397



9084




1566



4



61002




60005



60002



60003



1012



49



50



# Comfort

## Technical details

Composition	88% polyester - 12% polyurethane
Weight	Gr./ml. 385
Abrasion test	Martindale - ISO 12947-2: 150.000 rubs
Lightfastness	ISO 105-B02: 5-7
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4-4/5 Dry 4-4/5
Flame retardant	BS 5852 Part 1 0,1 Cigarette & Match BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 cigarette ÖNORM B 3825-B2-3800-Q1 UK NF P 92-503 M3 Class Uno UNI 9175 Class 1 IM CA TB 117-2013
Environment	Oeko-Tex 100 certified 100% free of heavy metals Environmentally friendly – contains 37% recycled fibres
Features	Permanently antistatic – contains carbon fibres Dirt-resistant – water and oil repellent Easy to clean – stands intensive cleaning Permanently fire-resistant – contains fire-retardant fibres Stretchable – superior upholstering properties

cat. Maxi

2018






# Divina 3

cat. Maxi

100% new wool  
Flame retardant - 45.000 Martindale




106



154



171



173



181



191



224



246



346



356



384




393




444



462



536



542



623




636




652




666



676



686



691



692



696



712




742



756



782



791



826



846



876



922



936



956




# Divina 3

## Technical details

Composition	100% new wool
Weight	Gr./ml. 840
Abrasion test	Martindale - ISO 12947-2: 45.000 rubs
Lightfastness	ISO 105-B02: 5/7
Pilling	ISO 12945-2: 3
Flame retardant	AS/NZS 1530.3 BS 5852 Crib 5 BS 5852 part 1 BS 5867 part 2 type B DIN 4102 B2 EN 1021-1/2 EN 13501, C-s1, d0, glued IMO FTP Code 2010 Part 8 NF D 60 013 NFPA 260 SN 198 898 5.3 with treatment UNI 9175 1IM US Cal. Bull. 117-2013 ÖNORM B1/ Q1
Environment	Natural fibres / Sustainable resource




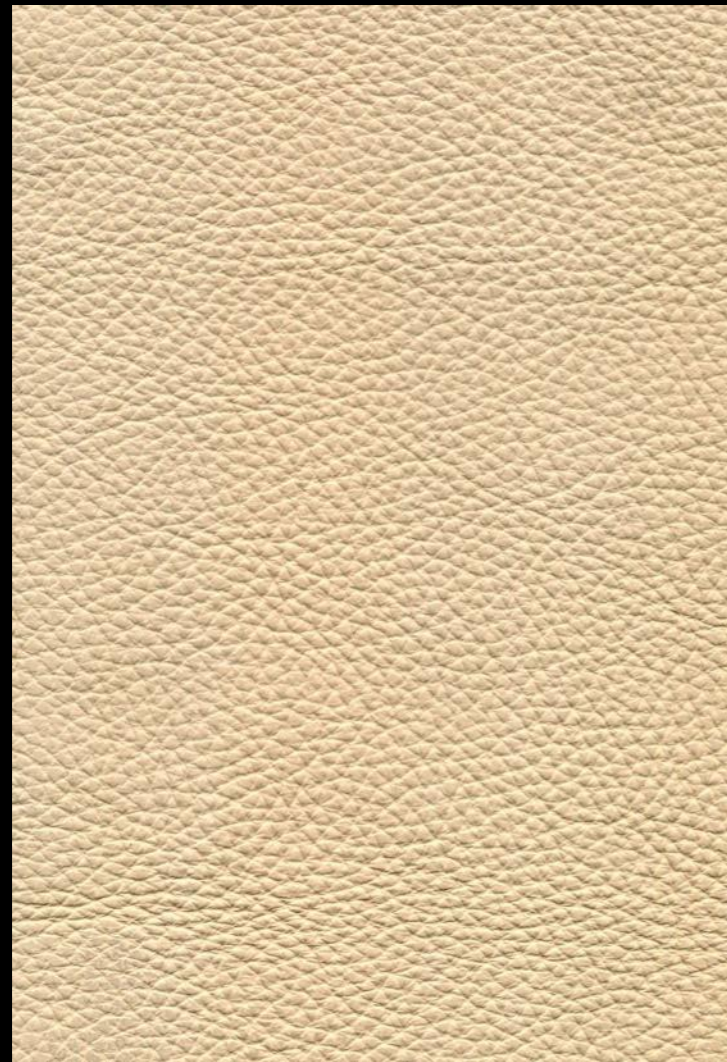


# Lux 1

cat. Lux

Pelle naturale - Natural leather  
Spessore - Thickness 1.3 / 1.5 mm




400



60



455



437



62



478



423



402



472



471



439



438



424




444



441



426



425



452



453




454



408



456



63



427



403



446



428



421



404



448



451



429




449



412



431




413









810



811



812



815



826



836



837




838



834



835



830



832



818



819



820



823



822




824



839




843



842



847



844



845



825



852



853



856



851



855



854



827



860



859



858



864

# Lux 2

cat. Lux

Pelle naturale - Natural leather  
Spessore - Thickness 0.9/1.1 mm



## Technical details

Origin	Raw hides
Place of origin	European
Thickness	0.9 / 1.1 mm
Lightfastness	ISO 105-B02: 7 blue scale
Tear strenght	ISO 3377-1: 56 N/mm
Fastness to rubbing	ISO 11640: Wet 150 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 20.000 cycles
Adhesion of finish	ISO 11644: 5 N/cm
Flame retardant	BS 5852 Part I (1979) - NI/0: Cigarette test N°1:Match test IMO FTP: Part 8-resolution A.652 (16) TB 117-A11: Cigarette test (California)





# Imperial 1

cat. Imperial


Pelle naturale - Natural leather  
Spessore - Thickness 1.3 / 1.5 mm




720



724



727



731



721



722



723



735



725




726



728



729



730



732



733



734



# Imperial 1

## Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.3 / 1.5 mm
Lightfastness	ISO 105-B02: 8 blue scale
Tear strenght	ISO 3377-1: 121 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 4 grey scale Dry 500 cycles value 4/5 grey scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11644: 13.4 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)





# Imperial 2

cat. Imperial

Pelle naturale - Natural leather  
Spessore - Thickness 1.1 / 1.2 mm



500



501



502



504



526



505



508



510



512



520



522



524



N47



N98



531



532




536



538



540



541



542



543



546



549



547




553



557



N46



558



560



561



564



565



566



567



569



# Imperial 2

## Technical details

Origin	Raw hides
Place of origin	European
Thickness	1.1 / 1.2 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 28 N/mm
Fastness to rubbing	ISO 11640: Wet 80 cycles value 4 grey scale Dry 500 cycles value 5 grey scale
Flex crack resistance	5402: 25.000 cycles
Adhesion of finish	ISO 11644: 7.5 N/cm
Flame retardant	EN 1021-1/2 Cigarette & Match IMO FTP: Part 8-Resolution A.652 (16) Cigarette & Match TB 117-A11: Cigarette test (California)





45



5



66



35



15



11



16



27



25



28



12



17



67



59



14



26



37




68



18



75



46



29



30



53



74



61



50



57



44



48



47



19



13



60



49



69

# Nabuk

cat. Imperial

Pelle naturale - Natural leather  
Spessore - Thickness 1.4 / 1.6




# Nabuk


## Technical details

Origin	Raw hides
Place of origin	Italy
Thickness	1.4 / 1.6 mm
Lightfastness	ISO 105-B02: 4 blue scale
Tear strenght	ISO 3377-1: 126 N/mm
Fastness to rubbing	ISO 11640: Wet 250 cycles value 3/4 gray scale Dry 500 cycles value 3/4 gray scale
Flex crack resistance	5402: 50.000 cycles
Adhesion of finish	ISO 11640: 5 N/cm
Flame retardant	BS 5852 cigarette and machh test Classe 1 IM
Features	Water repellent treatment Easy to clean Soft touch






lollipop




winegum



candybar



menthol



peppermint




popsicle




pastille




pistachio




candycane



popcorn




cottoncandy



tumtum



bonbon



machron




toffee




cookie



meringue



salt



bitter



licorice

# Drop

cat. Special

60% wool - 20% polyamide - 20% polyester  
Flame retardant - 80.000 Martindale



## Technical details

Composition	60% wool - 20% polyamide - 20% polyester
Weight	Gr./m <sup>2</sup> 600
Abrasion test	Martindale - ISO 12947-2: 80.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4
Fastness to rubbing	ISO 105-X12: Wet 4/5 Dry 4
Flame retardant	EN 1021-1/2 cigarette & match BS 5852 part 1 cigarette & match DIN 4102-B2 surface ignition US Cal. Tech. Bull. 117
Features	Stretch material
Environment	Oeko-Tex 100 certified Ecologically produced in Europe



# Saddle leather / Cuoio



natural  
naturale



brown  
marrone



black  
nero



# Saddle leather





MAHORA  
— CONCEPT —

**Mahora Concept**  
21 rue Gounod  
92210 Saint-Cloud  
01 87 124 124

[www.mahora-concept.com](http://www.mahora-concept.com)